


NOTE: All relevant materials are complied with RoHS directive .

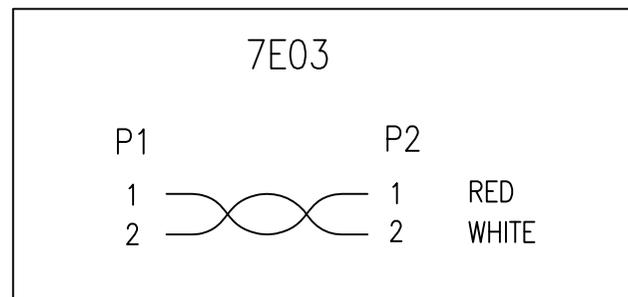

4	BLACK HEAT SHRINK TUBE $\phi 2.0 \times 20\text{mm}$	A4HA09-0959	2	M959
3	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 55\text{mm}$	A4HA10-0959	1	M959
	UL1061 26AWG INSULATOR WIRE, JACKET WHITE(103mm*1PCS), RED(103mm*1PCS), OD 1.0mm DRAWING NO.EH002601C-013	H5SE06-0304	2	M304
2	TERMINAL: CKM2542-T	A1RJ44-0031	2	M31
	HOUSING: CKM2542-2P, PITCH 2.54mm	A1RJ17-0031	1	M31
1	SWITCH: RED PUSHBUTTON <PB-05-7KR1-G>	A7KA26-1323	1	T1323
No.	DESCRIPTION		Q'TY	Supplier

APPROVED

CHECKED

DESINGER

DRAWING

DATE

HU

LPQ

YNAG

03/JUL/24



Cable Length
Unless Other Spec.
Tolerances:
0 ~200mm $\pm 10\text{mm}$
201~1000mm $\pm 20\text{mm}$
1001 ~1500mm $\pm 25\text{mm}$
1501~2100mm $\pm 30\text{mm}$
2100mm \uparrow $\pm 40\text{mm}$

REV.3 2024.07.03	MODIFY CABLE LENGTH & MODIFY P1 PLUG & MODIFY BLACK HEAT SHRINK TUBE	CHECKED	
REV.2 2024.05.22	TAKE OFF TRANSPARENT HEAT SHRINK TUBE & MODIFY BLACK HEAT SHRINK TUBE		
REV.1 2023.11.22	MODIFY CUTTING LENGTH		

DATE	03/JUL/24	ITEM NO.	CAS-T001-HNS-0320-1	UNIT:mm	
------	-----------	----------	---------------------	---------	--