

SMT Power Inductors

Flat Coils - PG0277NL Series



Pulse
a YAGEO company

- Height: 6.5mm Max
- Footprint: 14.5mm x 13.2mm Max
- Current Rating: up to 35A
- Inductance Range: 0.38μH to 2.65μH
- Self- leaded version of PG0077series

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

Part ⁸ Number	Inductance ² @ I _{rated} (μH TYP)	I _{rated} ³ (A)	DCR (mΩ)		Inductance @0 Adc (μH±20%)	Saturation ⁴ Current I _{SAT} (A)	Heating ⁵ Current I _{dc} (A)	Core Loss ⁶ Factor (K2)
			(TYP)	(MAX)				
PG0277.401NL	0.38	35	0.75	0.80	0.45	48	35	33.5
PG0277.801NL	0.75	31	1.20	1.30	0.80	38	31	42.5
PG0277.142NL	1.32	26	2.00	2.10	1.40	28	26	57.8
PG0277.202NL	1.90	21	2.80	2.90	2.00	24	21	67.6
PG0277.282NL	2.65	17	4.10	4.20	2.80	22	17	80.1

Notes:

- The temperature of the component (ambient plus temperature rise) must be within the specified operating temperature range.
- Inductance at I_{rated} is a typical inductance value for the component taken at rated current.
- The rated current listed is the lower of the saturation current @ 25°C or the heating current.
- The saturation current, I_{SAT}, is the current at which the component inductance drops by 20% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current, I_{dc}, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the component's performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- Core loss approximation is based on published core data:



$$\text{Core Loss} = K1 * (f)^{1.30} * (K2 \Delta I)^{2.241}$$

Where: Core Loss = in Watts
 K1=3.50E-10
 f = switching frequency in kHz
 K1 & K2 = core loss factors
 ΔI = delta I across the component in Ampere
 K2ΔI = one half of the peak to peak flux density across the component in Gauss
- Unless otherwise specified, all testing is made at 100kHz, 0.1VAC.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PG0277.401NL becomes PG0277.401NLT). Pulse complies to industry standard tape and reel specification EIA481


Mechanical

Schematic

PG0277.XXXNL

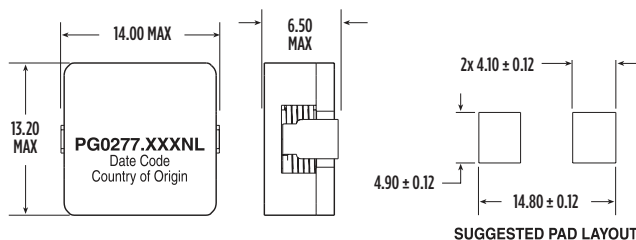

TAPE & REEL LAYOUT




Weight 5.5 grams
 Tape & Reel 300/reel
 Dimensions: mm
 Unless otherwise specified,
 all tolerances are: ± .25


SMT Power Inductors

Flat Coils - PG0277NL Series

Inductance vs Current Characteristics

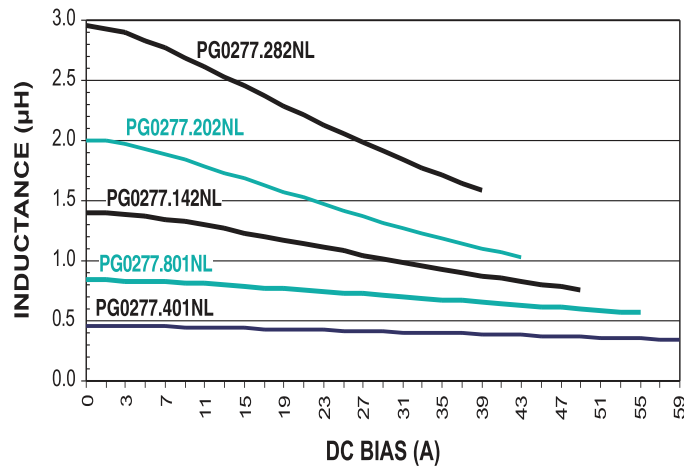

Typical Core Loss vx Peak Flux Density

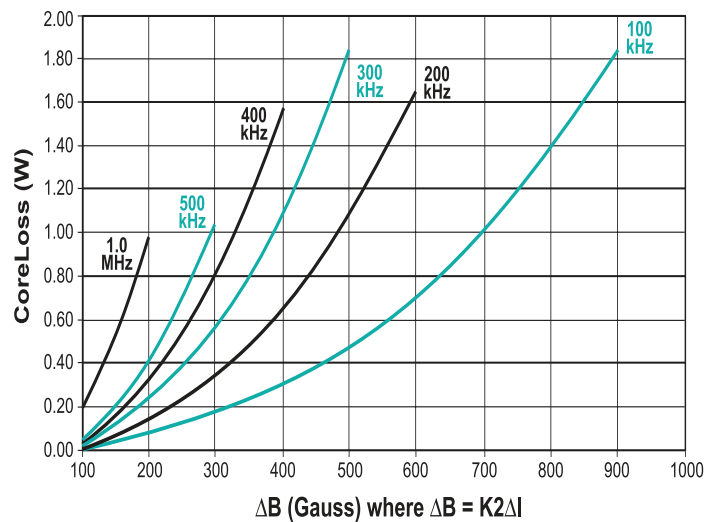

For More Information:

Americas - prodinfo_power@pulseelectronics.com | Europe - power-apps-europe@pulseelectronics.com | Asia - power-apps-asia@pulseelectronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. Pulse Electronics, Inc. All rights reserved.