
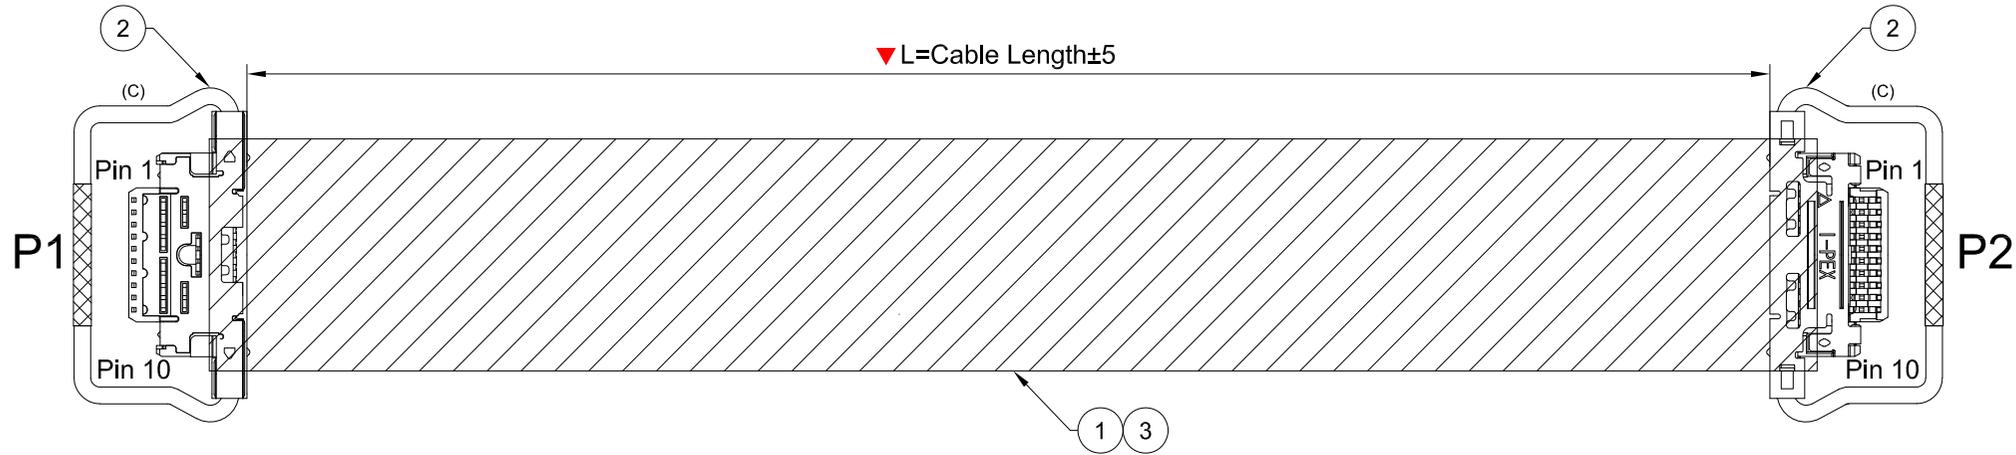


REV.	DESCRIPTION	DATE	DRAWN
A	NEW	04.30.2024	Tom
B	CHANGE NOTE ANDING PIN ASSIGNMENT	05.08.2024	Tom
C	ADDING PULL BAR	05.16.2024	Tom

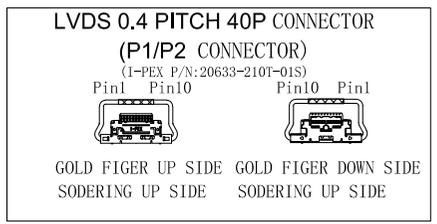

Order Code  
**CAS-T001-MCX-0360-X-IPX**

Cable Length  
No Suffix = 150mm  
1 = 250mm

▼ Pin Assignment

P1	1	2	3	4	5	6	7	8	9	10
P2	1	2	3	4	5	6	7	8	9	10
Cable	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX
Color	Blue									
Wire	UL 10005 #40									

- (B) Note
- 100% test, short, open, mismatch
  - Contact Resistance: 3Ω Max.
  - Insulation Resistance: 10MΩ Min.
  - Leakage Current: 0.5mA
  - Hi-Pot Test: 0.01 Second
  - Instant Short Circuit Test: 3 Second
  - Marked "▼" are FAI DIMS.

3	Tape	Acetate Tape, Black	3
2	Connector	PH 0.4 10P Plug Connector (I-PEX P/N:20633-210T-01S) (c)	2
1	Cable	UL 10005 #40 Coaxial Cable, Blue	10
NO.	Material	Specifications	Q'ty(pcs)



UNIT	mm	GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	SHEET
SCALE	Free	DIMENSION	TOLERANCE	Tom	05.16.2024	CAS-T001-MCX-0360-X-IPX	REV. C
		0~ ≤25	±1.00	CHECK	05.16.2024	SERIES NO.	
		25~ ≤100	±2.00	APPROVE	05.16.2024	CAS-T001-MCX-0360-X-IPX	
		100~ ≤500	±3.00	PAUL			

Micro Coaxial Cable Assembly  
0.40mm Pitch Plug Straight  
10 Pins Both Ends, With Lock  
UL 10005 40 AWG