
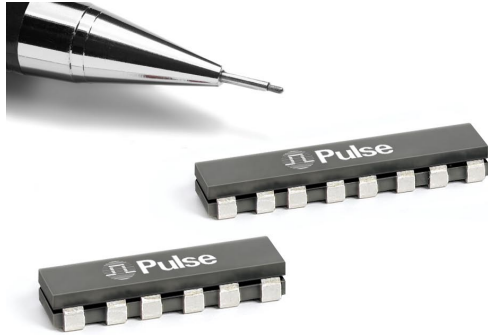


SMT POWER INDUCTORS

Power Beads - PA131xAHL Series Coupled Inductors

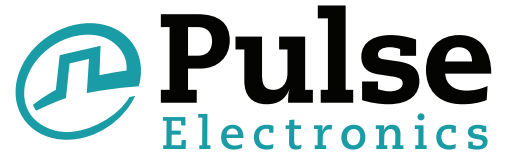

- Gen1.5 Coupled Inductors (PA131xAHL) enables higher efficiency compared to the Gen1.0 Coupled Inductors (PA131xNL) due to lower switching losses in the same package size
- For use only with Volterra chipsets
- Halogen Free and RoHS compliant

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C

Pulse Part No.	Number of Coupled Phases	Equivalent ¹ Transient Inductance per Phase (nH)	Rated ² per Phase (Adc)	Magnetizing Inductance per Phase ³ nH Min, 0Adc					DCR/Phase ⁴ (mΩ)	
				L1	L2	L3	L4	L5	TYP	MAX
				(1-2)	(3-4)	(5-6)	(7-8)	(9-10)		
PA1312AHL	2	50	40	310	310	—	—	—	0.425	0.5
PA1313AHL	3	50	40	290	400	290	—	—		
PA1314AHL	4	50	40	296	392	392	296	—		


NOTES:

- In a non-coupled multi-phase topology, the power supply sees the same inductance during transient and steady-state conditions. As a result, any attempt to lower the inductance to improve transient response has the negative result of increasing ripple and peak currents throughout the system during steady-state operation. However, in a coupled inductor multi-phase topology, the interaction of magnetic fields from each phase enables an overall reduction in ripple current during steady-state operation and a lower equivalent inductance during transient operation. The equivalent transient inductance per phase, as listed, represents the actual value of inductance that would be required in a non-coupled topology to realize the same transient performance. This value is achieved by core and winding geometry and is not directly measured by Pulse. For more information on the operation of the coupled inductor topology, please contact Volterra.
- The rated current per phase is based on Volterra's testing of the Pulse coupled inductors.
- The magnetizing inductance per phase is the measured inductance (at 0Adc) across each phase when all other phases are open-circuit.
- The nominal value of DCR/phase is for reference only. For production testing, the maximum limit is used.



Mechanical

Schematic

PA1312AHL

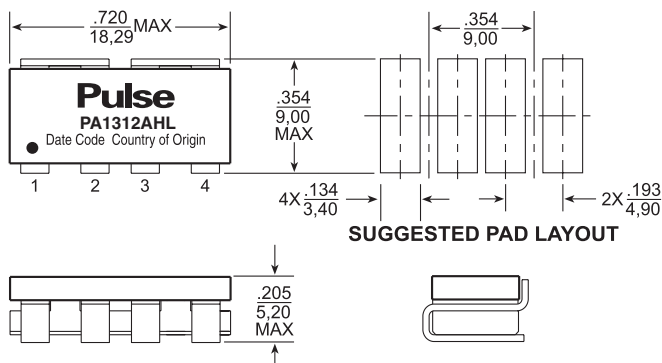


Weight 4.5 grams
Tape & Reel 650/reel
Tray 45/tray

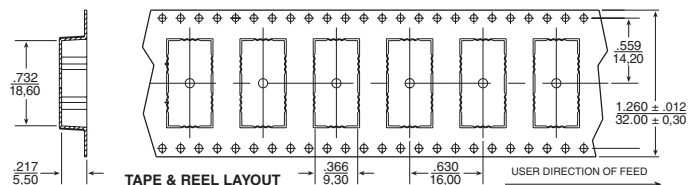

SMT POWER INDUCTORS


Power Beads - PA131xAHL Series Coupled Inductors

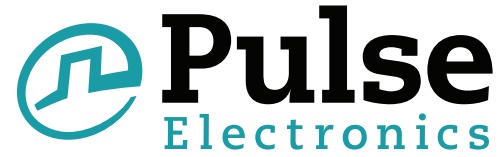



Mechanical

Schematic

PA1313AHL

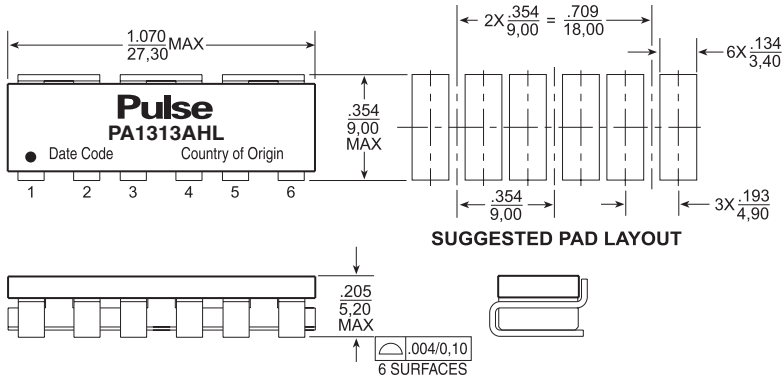


Weight 4.5 grams
Tape & Reel 650/reel
Tray 45/tray

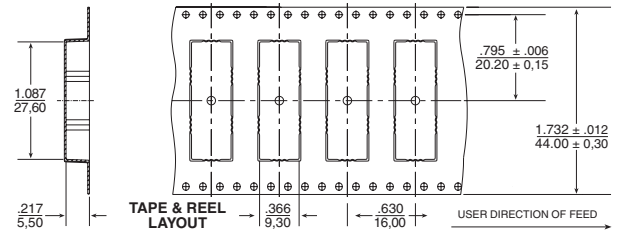



Mechanical

Schematic

PA1314AHL

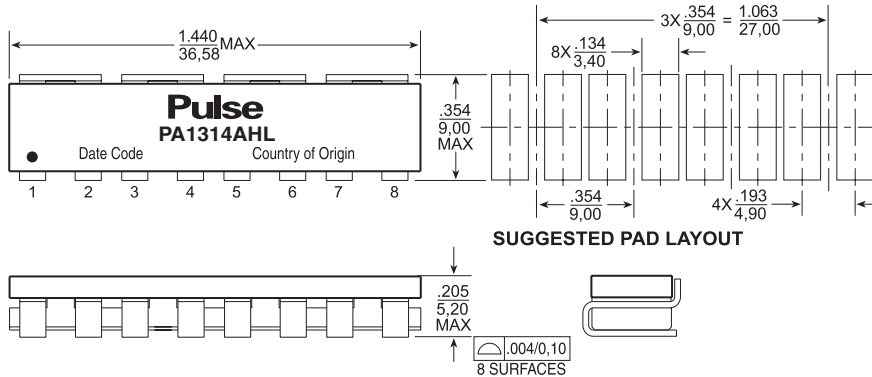

Weight 6.0 grams
Tape & Reel 550/reel
Tray 30/tray

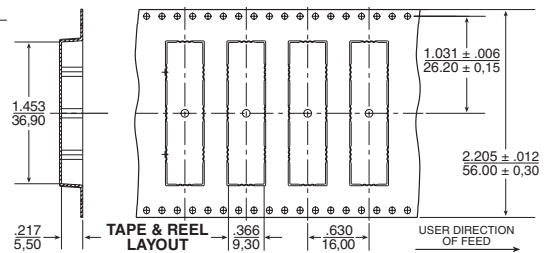

For More Information:

Pulse North American Headquarters
12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

Pulse European Headquarters
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057
TEL: 86 755 33966678
FAX: 86 755 33966700

Pulse North China
Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

TEL: 86 21 32181071
FAX: 86 21 32181396

Pulse South Asia
150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia
No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
32667

TEL: 886 3 4643715
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. Pulse and the Squarewave logo are trademarks of Pulse Electronics Corporation, registered in the U.S. and other countries. © Copyright, 2010. Pulse Electronics Corporation. All rights reserved.