
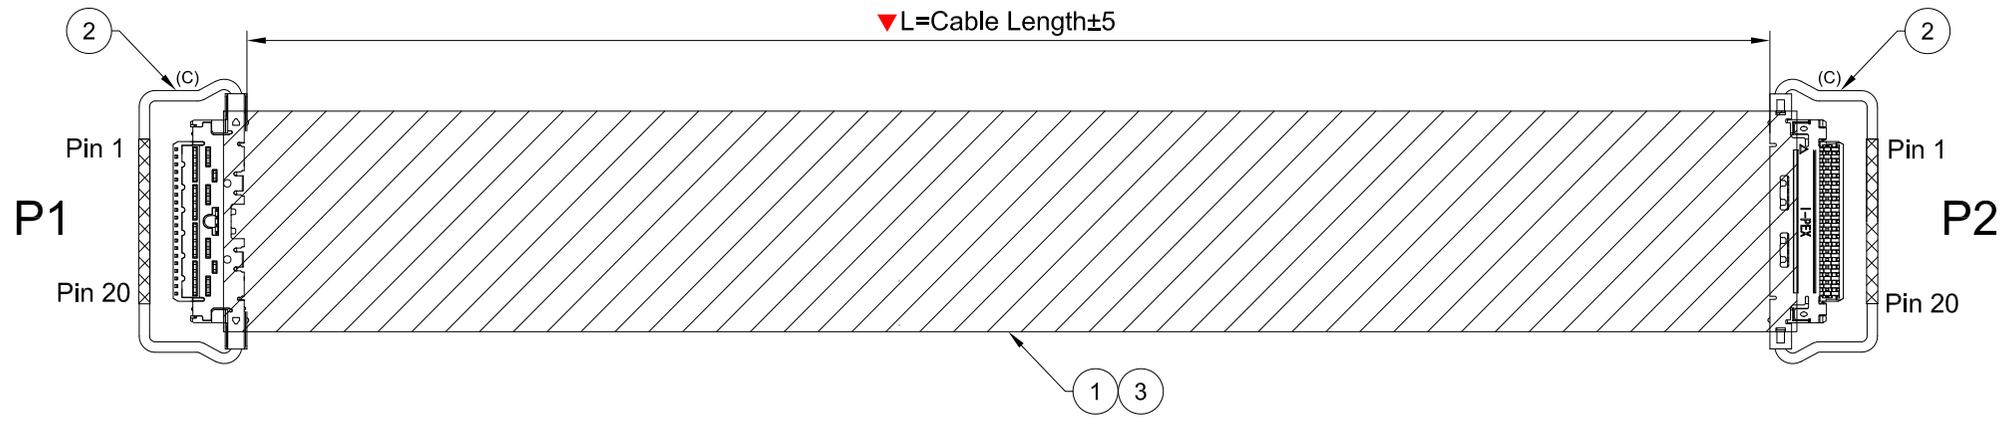


REV.	DESCRIPTION	DATE	DRAWN
A	NEW	05.02.2024	Tom
B	CHANGE NOTE	05.07.2024	Tom
C	ADDING PULL BAR	05.16.2024	Tom

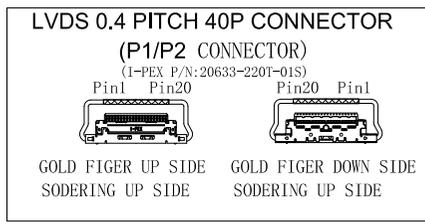

Order Code
CAS-T001-MCX-0361-X-IPX

Cable Length
No Suffix = 150mm
1 = 250mm

- (B) Note
- 100% test, short, open, mismatch
 - Contact Resistance: 3Ω Max.
 - Insulation Resistance: 10MΩ Min.
 - Leakage Current: 0.5mA
 - Hi-Pot Test: 0.01 Second
 - Instant Short Circuit Test: 3 Second
 - Marked "▼" are FAI DIMS.

▼ Pin Assignment

P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
P2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Cable	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX	MCX
Color	Blue																			
Wire	UL 10005 #40																			

3	Tape	Acetate Tape, Black	3
2	Connector	PH 0.4 20P Plug Connector (I-PEX P/N:20633-220T-01S) (C)	2
1	Cable	UL 10005 #40 Coaxial Cable, Blue	20
NO.	Material	Specifications	Q'ty(pcs)



UNIT	mm	GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	SHEET
SCALE	Free	DIMENSION	TOLERANCE	Tom	05.16.2024	CAS-T001-MCX-0361-X-IPX	REV. C
		0~ ≤25	±1.00	CHECK	05.16.2024	SERIES NO.	
		25~ ≤100	±2.00	APPROVE	05.16.2024	CAS-T001-MCX-0361-X-IPX	
		100~ ≤500	±3.00	PAUL			

Micro Coaxial Cable Assembly
0.40mm Pitch Plug Straight
20 Pins Both Ends, With Lock
UL 10005 40 AWG