


REV.	DESCRIPTION	DATE	DRAWN
A	NEW	08.28.2024	Tom




UV Glue

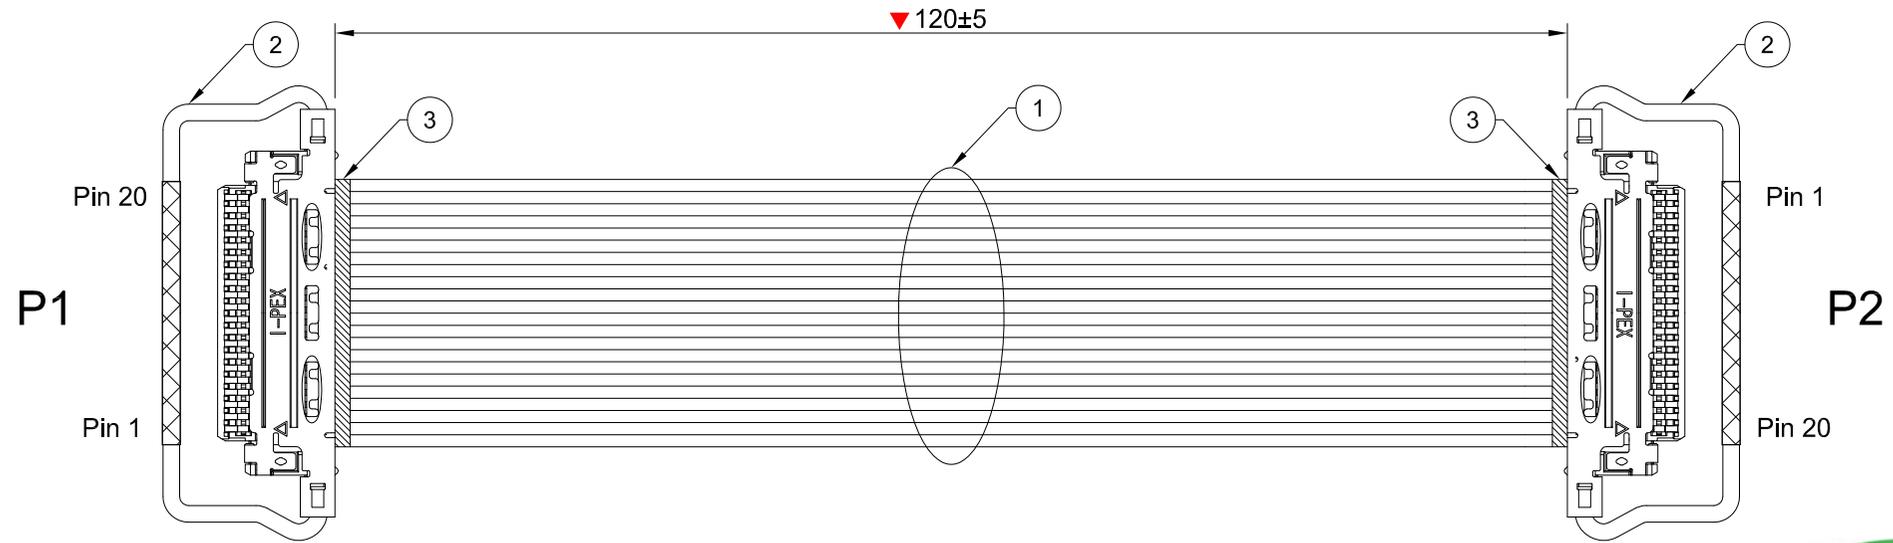

▼ Pin Assignment

P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
P2	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
Wire	UL 10005 #40, 50 OHM, Blue																			

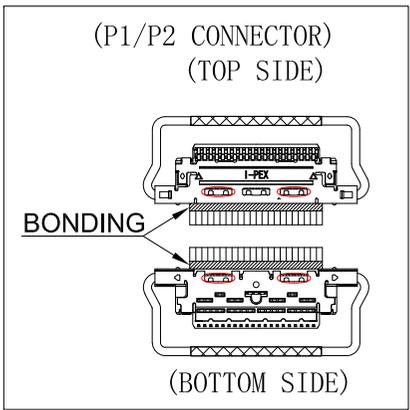

- Note
- 100% test, short, open, mismatch
 - Contact Resistance: 3Ω Max.
 - Insulation Resistance: 10MΩ Min.
 - Leakage Current: 0.5mA
 - Hi-Pot Test: 0.01 Second
 - Instant Short Circuit Test: 3 Second
 - Marked "▼" are FAI DIMS.

3	Bonding	UV Glue	xx
2	Connector	Pitch 0.4 20P G/F Connector (I-PEX P/N:20633-320T-01S)	2
1	Cable	UL 10005 #40 Coaxial Cable, Blue	20
NO.	Material	Specifications	Q'ty(pcs)



UNIT	mm	GENERAL TOLERANCE		DRAWN	Tom	DATE	08.28.2024	DWG. NO.	CAS-T001-MCX-0373-2-IPX	SHEET	2
SCALE	Free	DIMENSION	TOLERANCE	CHECK	Jerry	DATE	08.28.2024	SERIES NO.	CAS-T001-MCX-0373-2-IPX	REV.	A
		0~ ≤25	±1.00	APPROVE	PAUL	DATE	08.28.2024				
		25~ ≤100	±2.00								
		100~ ≤500	±3.00								

Micro Coaxial Cable Assembly
IPEX(20633-320T-01S) 0.40mm
Pitch Plug Straight 20 Pins Both
Ends, UL 10005 40 AWG