



EN62368-1



BS EN 62368-1



## FEATURES

- Universal 90 - 264VAC or 127 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -20°C to +60°C
- High I/O Isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage, over-temperature protection
- DIN rail TS-35/7.5 or 15 mountable
- Ultra slim design: suitable for small chassis and narrow space installation
- Safety according to UL61010, UL508, EN62368

LI120-20BxxR2S is Mornsun AC-DC converter series featuring a cost-effective, energy efficient green power supply solution for standard DIN-rail mounting. The products offer a high level of stability and immunity to noise for industrial control equipment, machinery, and other industrial equipment in a variety of harsh environments. These light weight AC-DC converters have an extremely compact design and the standard rail installation for space saving. With good EMC performance, compliant with international UL61010-1, UL508, EN62368-1 standards for EMC and safety.

## Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
EN/BIS/BS	LI120-20B12R2S	120	12V/10A	12-14	85	3000
	LI120-20B24R2S		24V/5A	24-28	88	1200
	LI120-20B48R2S		48V/2.5A	48-55	89	800

Note: \*Use suffix "QQ" for double-faced conformal coating.

## Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		90	--	264	VAC
	DC input		127	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	2.7	A
	230VAC		--	--	1.6	
Inrush Current	115VAC	Cold start	--	30	--	
	230VAC		--	55	--	
Leakage Current	240VAC		<1.0mA			
Hot Plug			Unavailable			

## Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	12V	--	±2.0	--	%
		24V/48V	--	±1.0	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load		--	±1.0	--	mV
Ripple & Noise*	20MHz bandwidth	12V	--	--	100	
		24V	--	--	120	





# AC/DC 120W Enclosed Switching Power Supply

## LI120-20BxxR2S, LI120-20BxxR2S-QQ Series

**MORNSUN®**

	(peak-to-peak value)	48V	--	--	150	
Temperature Coefficient			--	±0.03	--	%/℃
Minimum Load			0	--	--	%
Hold-up Time	115VAC		8	--	--	ms
	230VAC		16	--	--	
Short Circuit Protection	Recovery time < 3s after the short circuit disappear.		Constant current, continuous, self-recovery			
Over-current Protection	230VAC, rated load	Normal temperature, high temperature	105%-150% Io, constant current mode, automatic recover after fault condition is removed			
		Low temperature	≥105%Io, constant current mode, automatic recover after fault condition is removed			
Over-voltage Protection	12V		≤16V (Output voltage turn off, re-power on for recover)			
	24V		≤33V (Output voltage turn off, re-power on for recover)			
	48V		≤60V (Output voltage turn off, re-power on for recover)			
Over-temperature Protection			Output voltage turn off, re-power on for recover			
Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.						

### General Specifications

Item		Operating Conditions				Min.	Typ.	Max.	Unit
Isolation Test	Input - 	Electric strength test for 1min., leakage current <10mA				2000	--	--	VAC
	Input - output					4000	--	--	
	Output - 					500	--	--	
Insulation Resistance	Input - 	At 500VDC				100	--	--	M Ω
	Input - output					100	--	--	
	Output - 					100	--	--	
Operating Temperature						-20	--	+60	℃
Storage Temperature						-40	--	+85	
Storage Humidity		Non-condensing				10	--	95	%RH
Operating Humidity						20	--	90	
Switching Frequency						--	65	--	kHz
Power Derating	Operating temperature derating	All series	-20℃ to -10℃	115VAC	2.0	--	--	% /℃	
			-20℃ to -10℃	230VAC	0	--	--		
			+40℃ to +60℃	115VAC	2.5	--	--		
		12V	+45℃ to +60℃	230VAC	3.33	--	--		
		24V/48V	+50℃ to +60℃	230VAC	5	--	--		
	Input voltage derating		90VAC -115VAC		1.0	--	--	%/VAC	
Safety Standard						IS13252 (Part1) safety approved & EN62368-1, BS EN 62368-1 (Report) Design refer to UL61010-1, UL508			
Safety Class						CLASS I			
MTBF		MIL-HDBK-217F@25℃				≥300,000 h			

### Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimensions	36.00 x 125.00 x 100.00mm
Weight	410g (Typ.)
Cooling Method	Free air convection

**MORNSUN®**

MORNSUN Guangzhou Science & Technology Co., Ltd.



2022.01.04-A/5 Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

## Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32/EN55032 CLASS A		
	RE	CISPR32/EN55032 CLASS A		
	THD	IEC/EN61000-3-2 CLASS A		
Immunity	ESD	IEC/EN 61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria B
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	±4KV	perf. Criteria B
	Surge	IEC/EN 61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria B
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

## Product Characteristic Curve

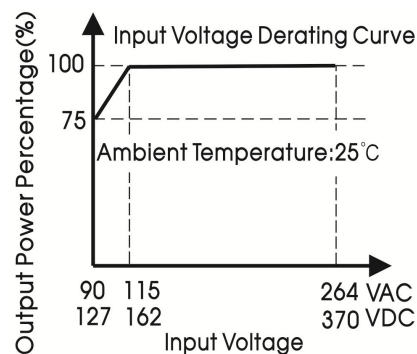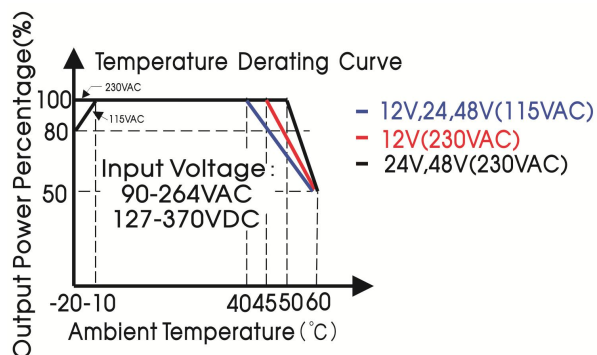


Note: 1. With an AC input voltage between 90-115VAC and a DC input between 127-162VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

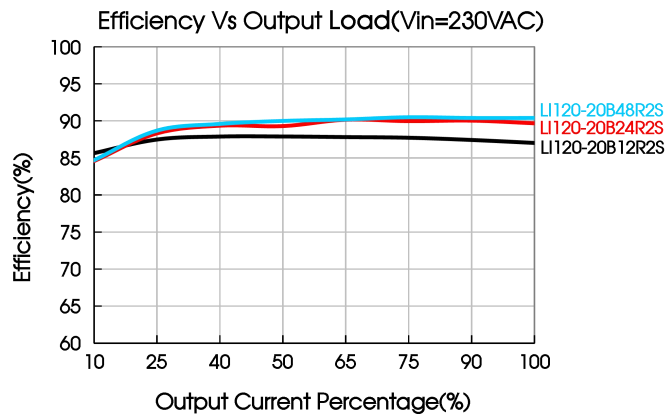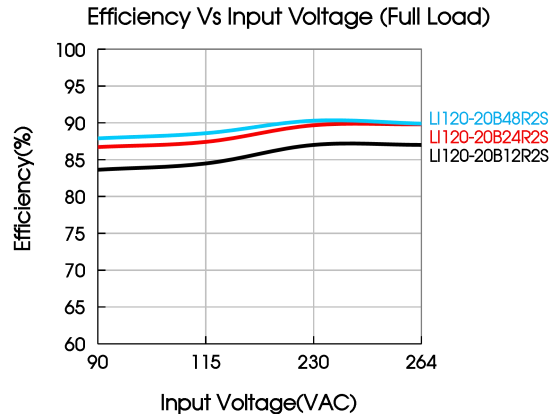


Dimensions and Recommended Layout

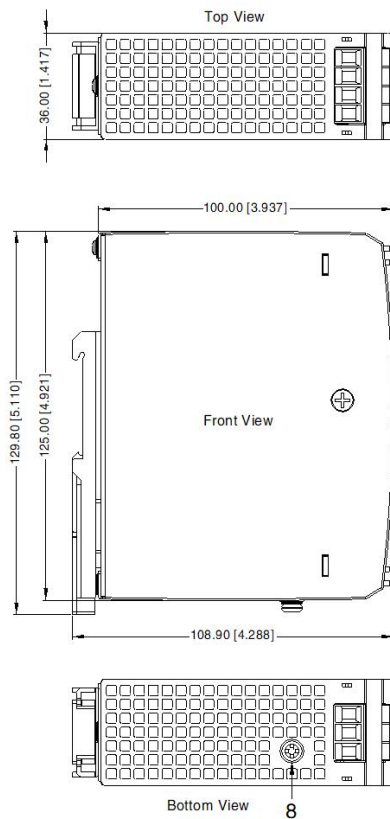

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Mark
1	-Vo
2	-Vo
3	+Vo
4	+Vo
5	AC(N)
6	AC(L)
7	(⊥)

7、8 any position must be connected to the earth (⊥)

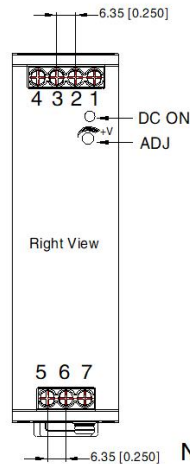

Note:

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: 26-10 AWG

Tightening torque: Max 0.4 N·m

Mounting rail: TS35, rail needs to connect safety ground

General tolerances:  $\pm 1.00 [\pm 0.039]$

Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220163;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75% RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE (⊥) of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2022.01.04-A/5

Page 4 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation