
DESCRIPTION:
35-38.4W Wide input AC/DC switching power supply

The rated output power of TPC/LR-35-XS series is 35-38.4W, input voltage range: 90-264VAC, output voltage: 5V,12V,15V,24V,36V,48V,High reliability, precision,efficiency, ultra-small size, no external heat sink required, stable output voltage and etc, with short circuit, overload protection, Widely used in telecommunications, industrial control, instrumentation, data acquisition, signal control, New Energy, Security,and other electronic systems.

FEATURES

AC input : 90VAC-264VAC	100% full load burn-in test	short circuit, overload,over-voltage protection
Operating temperature: -30℃~70℃	RoHS complaint	Low standby power consumption<0.5W
All using 105℃ long-life electrolytic capacitors	High reliability,efficiency ,long life-time	Full compliance with safety regulation,EMC design

SELECTION GUIDE

Part Number	Input		Output					Efficiency @25℃, (Typ) %
	Volatge (VAC)		Voltage (VDC)	Pre-set voltage @25℃ (V)	Rated current (A)	Current range(A)	Rated power(W)	
	Rated	Range values						
TPC/LR-35-5S	220	90-264	5	5.00-5.05	7.0	0-7.0	35	82
TPC/LR-35-12S	220	90-264	12	12.00-12.10	3.0	0-3.0	36	86
TPC/LR-35-15S	220	90-264	15	15.00-15.10	2.4	0-2.4	36	88
TPC/LR-35-24S	220	90-264	24	24.00-24.10	1.5	0-1.5	36	88
TPC/LR-35-36S	220	90-264	36	36.00-36.10	1.0	0-1.0	36	88
TPC/LR-35-48S	220	90-264	48	48.00-48.10	0.8	0-0.8	38.4	89

All specifications typical at TA=25℃, nominal input voltage and rated output current unless otherwise specified.

OUTPUT CHARACTERISTICS

Conditions	Conditions	Parameter
Ripple and noise,Ta is ambient , 0<Ta≤70℃	5V output voltage	≤80mVp-p
	12V, 15V output voltage	≤120mVp-p
	24V, 36V,48V output voltage	≤200mVp-p
Ripple and noise,Ta is ambient , -30<Ta≤0℃	5V output voltage	≤120 mVp-p
	12V,15V output voltage	≤200mVp-p
	24V,36V output voltage	≤300mVp-p
	48V output voltage	≤500mVp-p
Dynamic load characteristics, -30<Ta≤70℃	5V output voltage	0.7A-7A:<±650mv 0.7A~3.5A:<±450mV 3.5A~7A: <±450mV
	12V output voltage	0.3A-3A:<±650mv 0.3A~1.5A:<±450mV 1.5A~3A: <±450mV
	15V output voltage	0.24A-2.4A:<±650mv 0.24A~1.2A:<±450mV 1.2A~2.4A: <±450mV
	24V output voltage	0.15A-1.5A:<±650mv 0.15A~0.75A:<±450mV 0.75A~1.5A: <±450mV
	36V output voltage	0.1A-1A:<±650mv 0.1A~0.5A:<±450mV 0.5A~1A: <±450mV
	48V output voltage	0.08A-0.8A:<±650mv 0.08A~0.4A:<±450mV 0.4A~0.8A: <±450mV
Output adjustment range @25℃	5V output voltage	4.5V-5.5V
	12V output voltage	10.8V-13.8V
	15V output voltage	13.5V~16.5V
	24V output voltage	21.6V-26.4V
	36V output voltage	32.4V~39.6V
	48V output voltage	43.2V-52.8V

OUTPUT CHARACTERISTICS

Voltage regulation accuracy@-30~70℃	±3%
Line regulation@-30~70℃	±0.5%
Load regulation@-30~70℃	±1%
Temp. coefficient@-30~70℃	±0.03%/℃
Set-up time@25℃	≤1S /230Vac full load
Hold-up time@25℃	≥15mS(230Vac input, Full load)
Overshoot&Undershoot@-30~70℃	<5.0%

INPUT CHARACTERISTICS

Conditions	Parameter
Input voltage range	90Vac~264Vac
Max. input voltage	300Vac input,no damage, dwell time 5000 mS
Rated input voltage range	100Vac~240Vac
Frequency Range	47Hz~63Hz
Set-up voltage@-30~70℃	90Vac (refer to the derating curve)
Input current@25℃	<0.75A@115Vac
Inrush current @25℃	50A@230Vac Cold start
Standby power@25℃	<0.5W

PROTECTION @-30~70℃

Conditions	Parameter	Notes
Over-power (5Voutput)	38.5W~60W	hiccup mode, auto recovery
Over-power (12Voutput)	39.6W~60W	
Over-power (15Voutput)	39.6W~600W	
Over-power (24Voutput)	39.6W~60W	
Over-power (36Voutput)	39.6W~60W	
Over-power (48Voutput)	42.2W~60W	hiccup mode, auto recovery
Over-voltage (5Voutput)	5.75V~7.5V	
Over-voltage (12Voutput)	13.8V~18V	
Over-voltage (15Voutput)	18.75V~22.5V	
Over-voltage (24Voutput)	28.8V~36V	
Over-voltage (36Voutput)	41.4V~48.6V	hiccup mode, auto recovery
Over-voltage (48Voutput)	55.2V~72V	
Over-current (5Voutput)	7.7A~12A	
Over-current (12Voutput)	3.3A~5A	
Over-current (15Voutput)	2.64A~4A	
Over-current (24Voutput)	1.65A~2.5A	
Over-current (36Voutput)	1.1A~1.67A	
Over-current (48Voutput)	0.88A~1.25A	
Output short circuit protection	Long-term mode, Auto recovery	

ENVIRONMENT CHARACTERISTICS

Conditions	Parameter
Operating amb. Temp.&Humi.	-30℃~70℃; 20%~90%RH No condensing (refer to the derating curve)
Storage Temp. & Humi.	-40℃~85℃; 10%~95%RH No condensing
Vibration	10 ~ 500Hz, 5G 10min./1cycle, period for60min. each along X,Y, Z axes
Pulse	20G/11mS pulse ,3 times at each X,Y,Z axes
Altitude	5000m

SAFETY&EMC STANDARDS @25℃


Conditions	Parameter
Safety Standards	UL60950-1, TUV EN60950-1, EN60335-1, EN61558-1/-2-16, CCC GB4943
Withstand Voltage	I/P-O/P:3.0KVac/10mA; I/P-FG:1.5KVac/10mA; O/P-FG:0.5KVdc/10mA test time:1min.
Grounding test	Test condition: 40A / 2min.; Grounding resistance: <0.1 ohms.
Leakage Current	I/P-Grounding≤3.5mA; I/P-O/P ≤0.25mA
Isolation resistance	I/P-O/P: 100M ohms; I/P-FG : 100M ohms; O/P-FG : 100M ohms
EMC emission	EN55032 Class B/FCC Part15 Class B
EMC immunity	EN61000-4-2,4,5 Leve3 Criteria A , EN61000-4-11

OTHERS

Conditions	Parameter
Cooling method	Cooling by free air flow
Dimension (L*W*H)	99*82*30mm
Net Weight	0.23kg

RELIABILITY CHARACTERISTICS

Conditions	Parameter
MTBF	200,000Hrs AT 25℃, MIL-217 Method 2 Components Stress Method

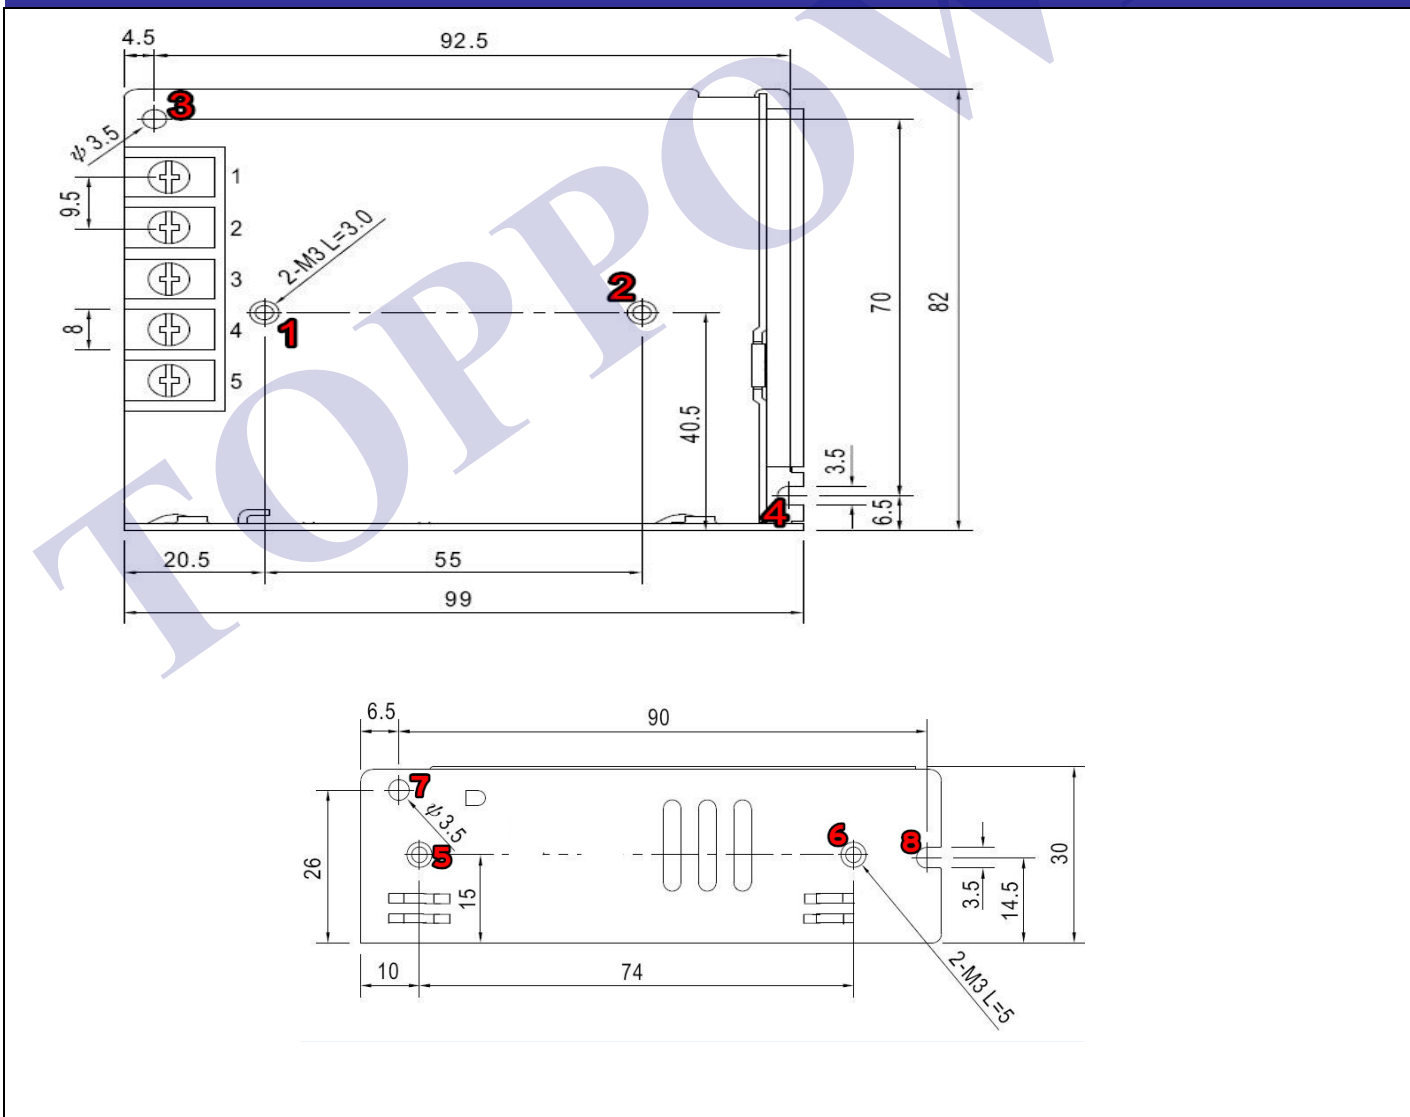MECHANICAL DIMENSIONS


MECHANICAL DIMENSIONS

Mounting location	Mounting method	Mounting holes	Screw Spec	Lmax	Torque(max)
Bottom mounting	Fix by Screws	1~2	M3	4mm	6.5Kgf.cm
		3~4	M3	4mm	
Side mounting	Fix by Screws	5~6	M3	4mm	6.5Kgf.cm
		7~8	M3	4mm	


1.AC input terminals definition

No.	Function	Wire specs	Torque(max)
1	L	22-12AWG	12Kg/cm
2	N		
3	PE		



2.DC output terminals definition

No.	Function	Wire specs	Torque(max)
4	V-	22-12AWG	12Kg/cm
5	V+		


RECOMMEND CIRCUIT

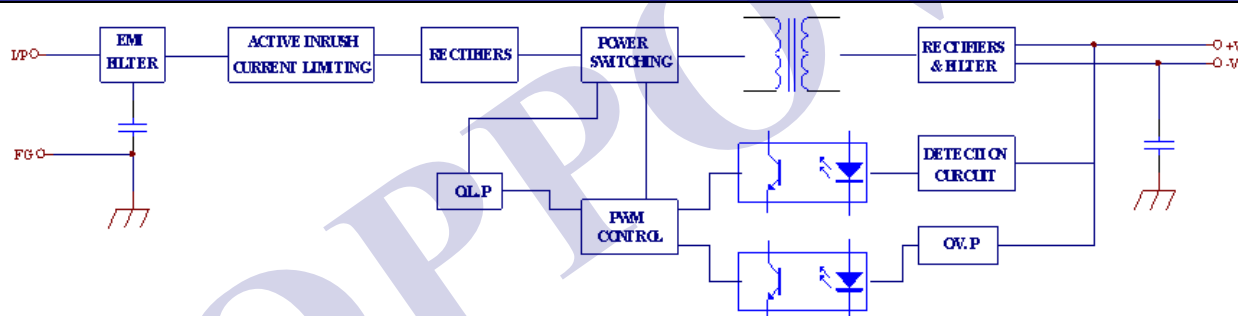

DERATING CURVE

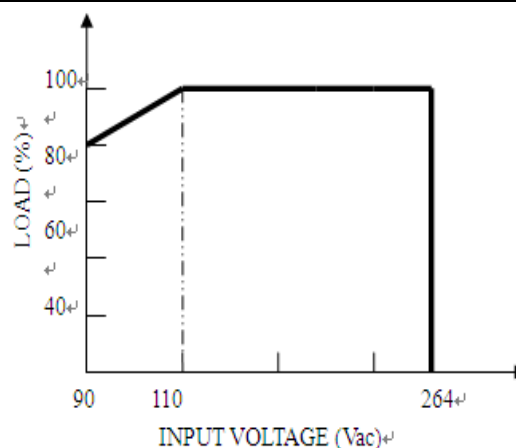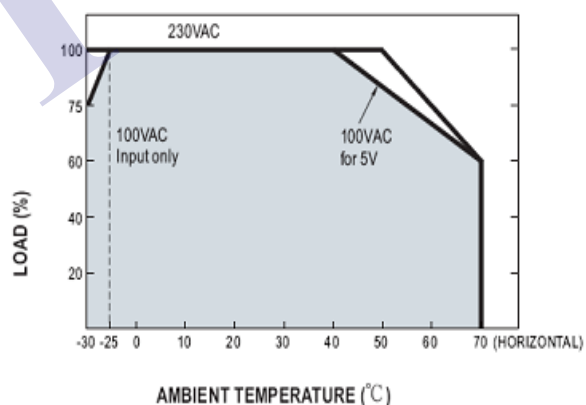

OUTPUT CHARACTERISTICS CURVE

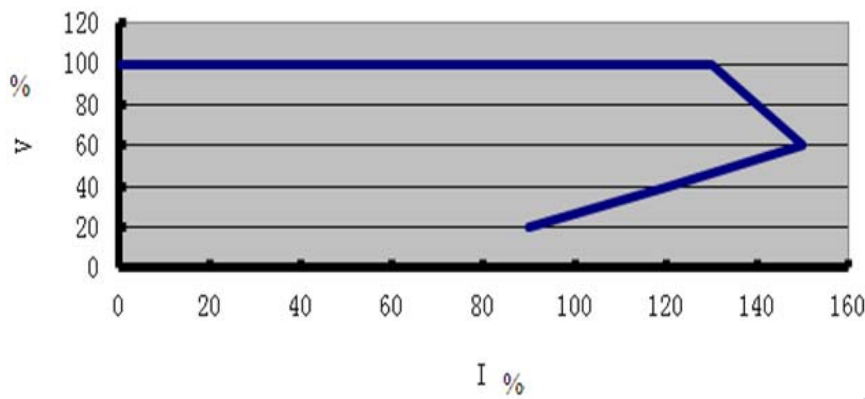

MODEL SELECTION

