

TX-3535W5FC120-OGVCND34-D06

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under 1500 mA.
- ◆High luminous output.
- ◆No UV.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆GaN

Emitting Color:


- ◆ White

Applications:

- ◆Indoor lighting
- ◆Outdoor lighting
- ◆ Industrial Lighting
- ◆Consumer Lighting

Part No.	TX-3535W5FC120-OGVCND34-D06	Spec No.	WKF-ED0051	Page	1 of 9
----------	-----------------------------	----------	------------	------	--------


Package Dimensions:

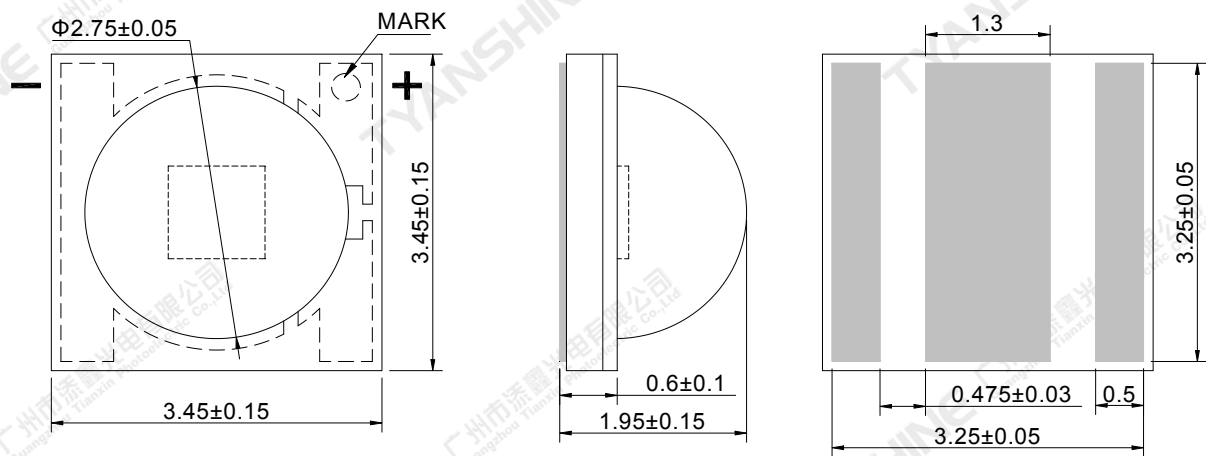


Top view

Side view

Bottom view

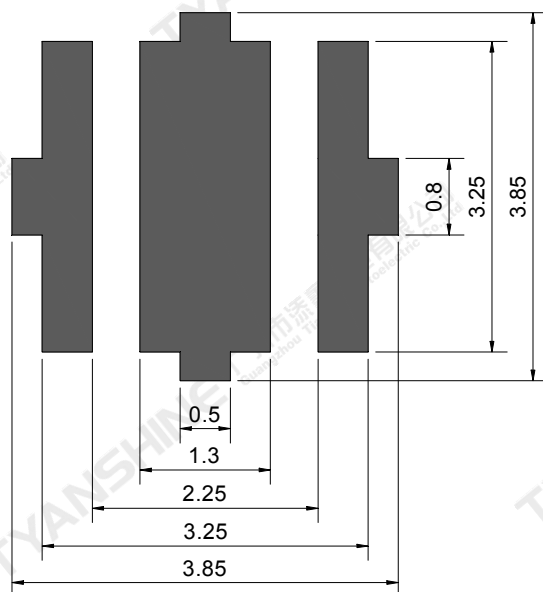

Recommended solder pad

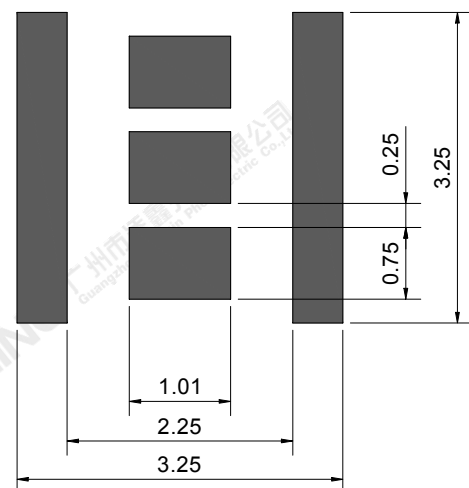

Recommended stencil pattern

Notes:

1. All dimensions are in millimeters .
2. Tolerances unless otherwise mentioned are $\pm 0.1 \text{ mm}$.

Absolute Maximum Ratings (Tc=25℃)

Parameter	Symbol	Ratings	Unit
Forward Current	IF	1500	mA
Reverse Voltage	VR	5	V
Reverse Current	IR	2	μA
Power Dissipation	PD	5250	mW
Junction Temperature	Tj	150	℃
Electrostatic Discharge Threshold (ESD)	ESD	ESD sensitive device	V
Storage Temperature	Tstg	-40~+70	℃
Operation Temperature	Topr	-30~+100	

Notes:

1.Specifications are subject to change without notice.

2.The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.

..Precautions for ESD:

STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Luminous Flux	ϕ_v	If=700mA	210	235	260	lm
Correlated Colour Temperature	CCT		2100	2200	2300	K
Spectral Line Half-Width	$\Delta\lambda$		85	90	95	nm
Forward Voltage	V_f		2.9	3.2	3.5	V
Viewing Angle at 50 % IV	$2\theta_{1/2}$	—	—	120	—	Deg
Reverse Current	I_R	—	—	—	—	μA
Thermal Resistance Junction to Case	$R\theta_{J-C}$	If=700mA	—	6.4	—	K/W
Temperature Coefficient of Voltage	$V\Delta F/T$		—	-2	—	mV/°C

White light Color coordinate filing (IF=700mA)

Region	CCT Range(K)		X1	Y1	X2	Y2	X3	Y3	X4	Y4
	Min	Max								
AC32	2100	2150	0.5372	0.4410	0.5309	0.4410	0.5379	0.4500	0.5439	0.4498
AC21	2150	2240	0.5241	0.4322	0.5136	0.4327	0.5198	0.4410	0.5301	0.4400
AC22			0.5301	0.4400	0.5198	0.4410	0.5267	0.4504	0.5379	0.4500
AB22	2240	2300	0.5198	0.4410	0.5132	0.4410	0.5199	0.4507	0.5267	0.4504

Notes:


- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance:±15%.
- 4.Forward voltage measurement tolerance:±0.15V.

Part No.	TX-3535W5FC120-OGVCND34-D06	Spec No.	WKF-ED0051	Page	4 of 9
----------	-----------------------------	----------	------------	------	--------


Typical Electrical/Optical Characteristics Curves



(25°C Ambient Temperature Unless Otherwise Noted)



Forward Current VS. Forward Voltage

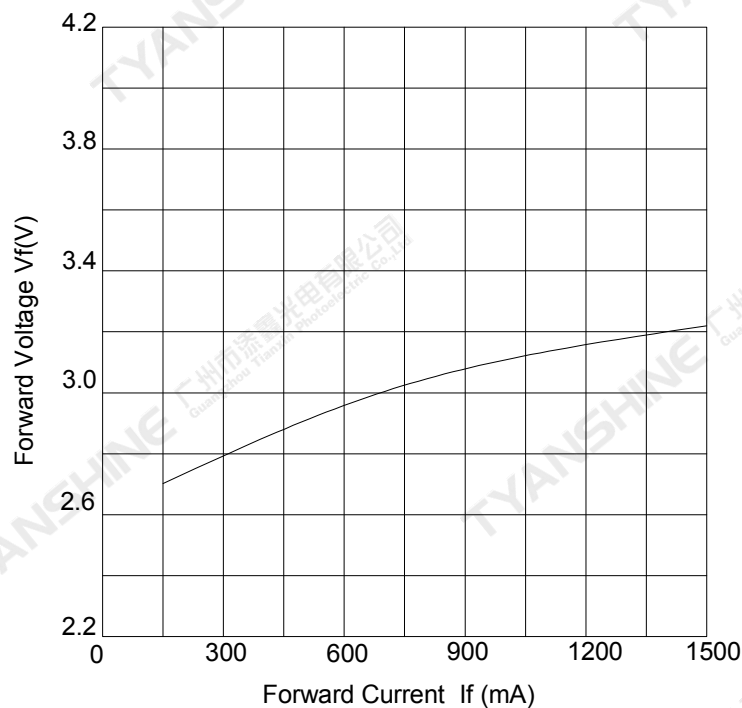

Forward Current VS. Luminous flux

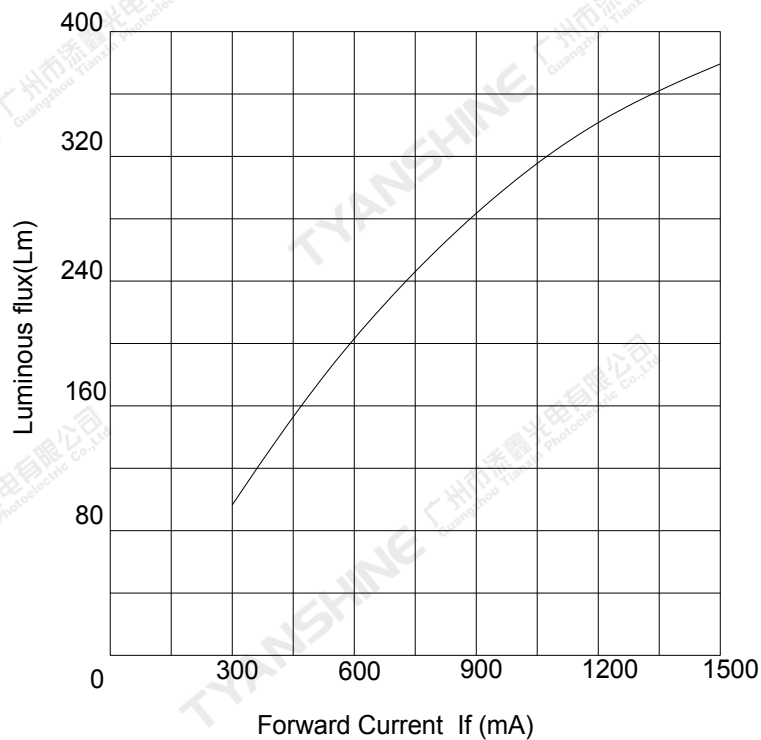

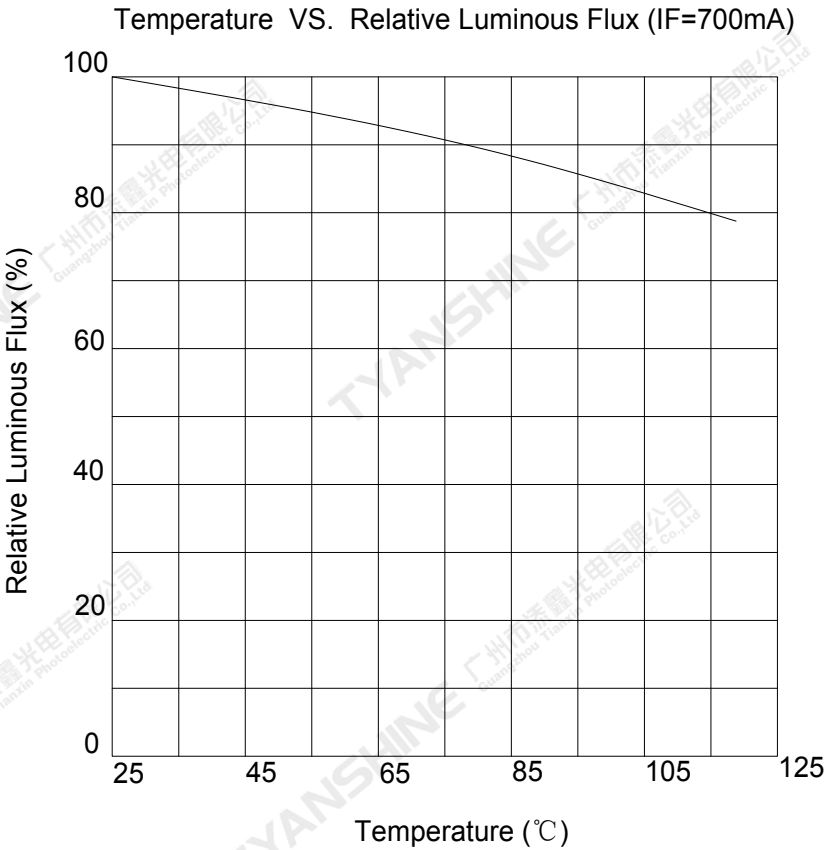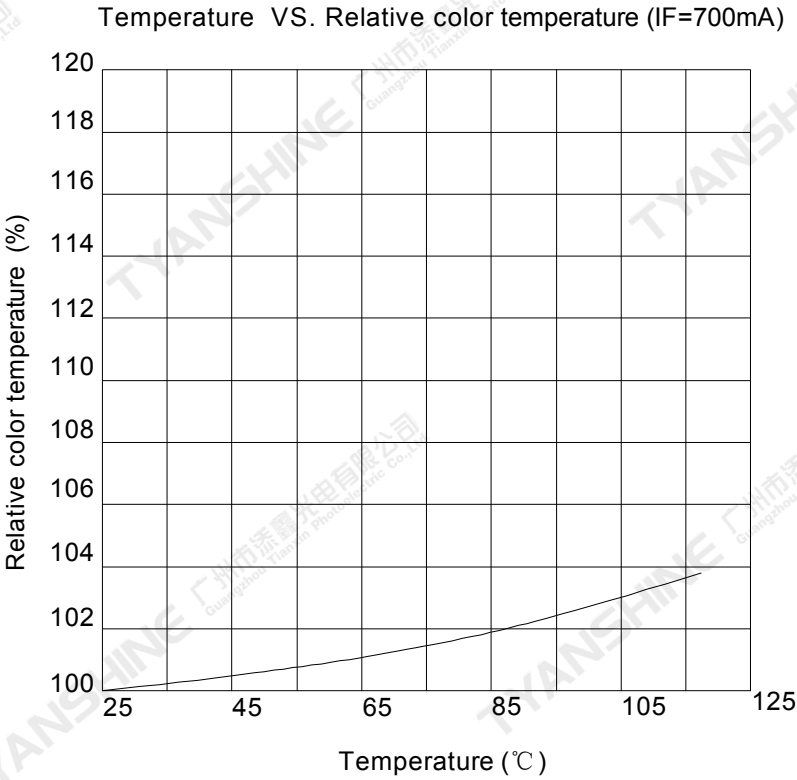

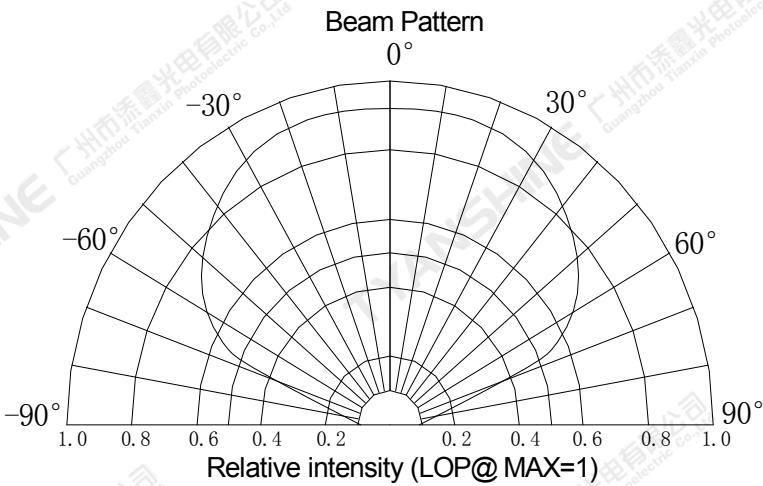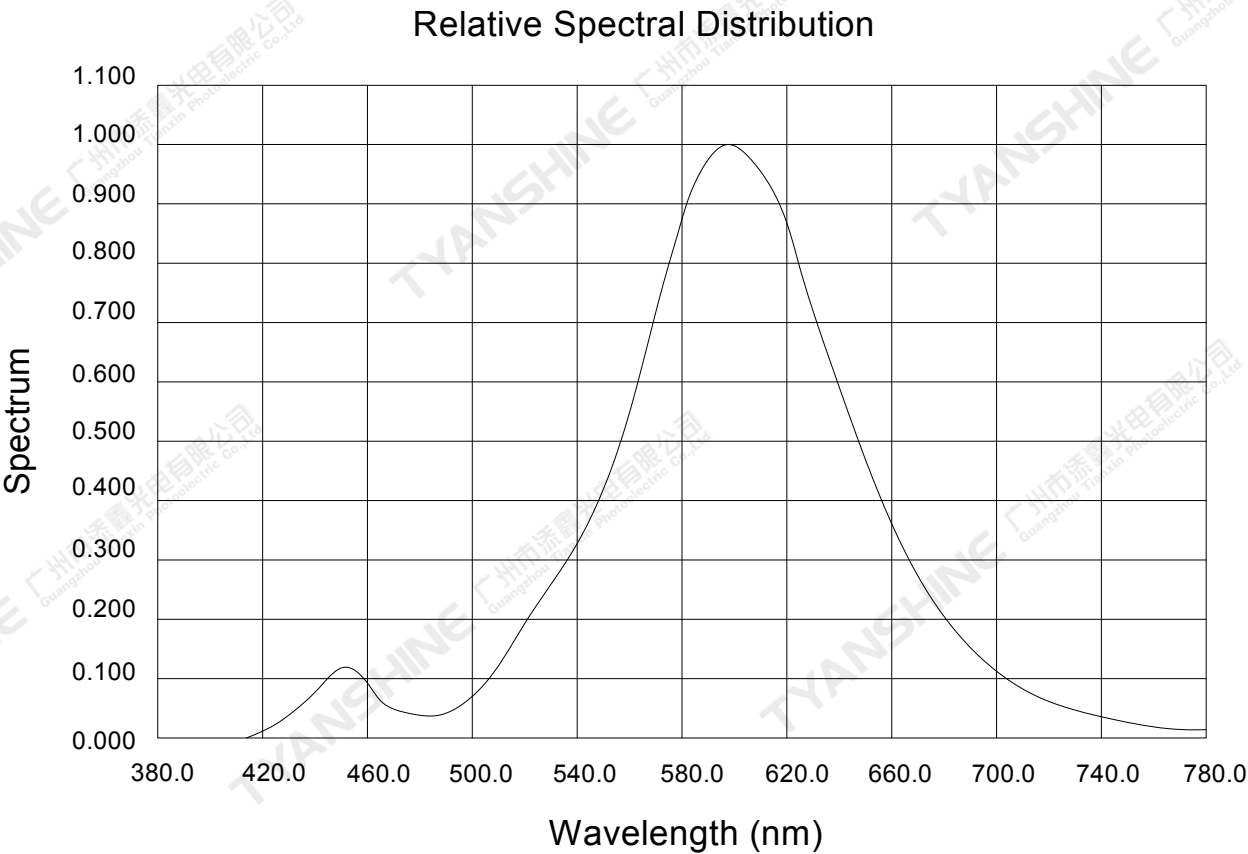

Notes:

1. $2\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is $\pm 5^\circ$.

Usage Precautions


Storage Environment Condition

Temperature: 5°C ~ 30°C (41°F ~ 86°F)

Humidity: 60% RH Max.

Soldering Condition

Use the conditions shown to the under figure.

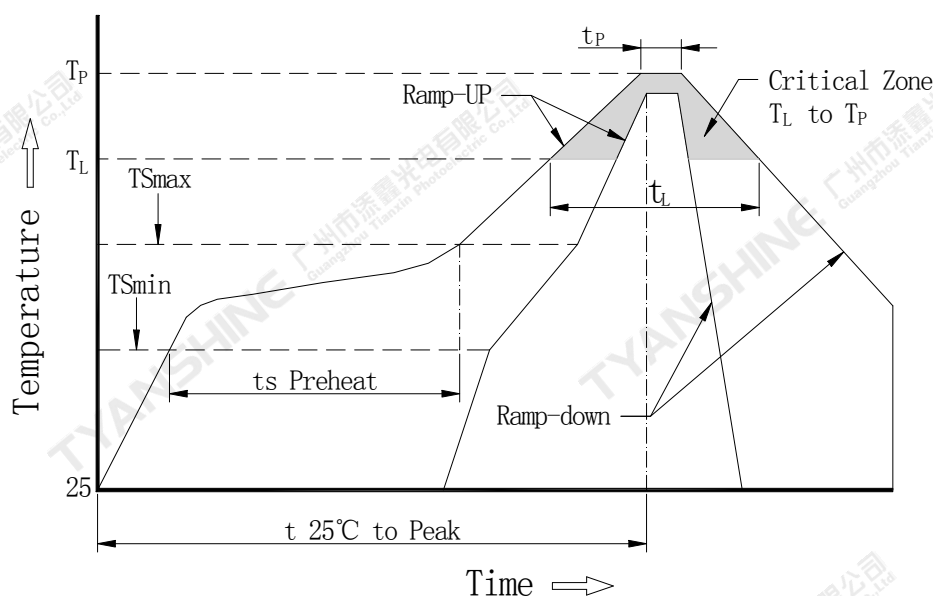



Profile Feature	Lead-Based Solder
Average Ramp-Up Rate (Tsmax to Tp)	3°C/second max.
Preheat: Temperature Min (Tsmin)	100°C
Preheat: Temperature Max (Tsmax)	150°C
Preheat: Time (Tsmin to Tsmax)	60-120 seconds
Time Maintained Above: Temperature (Tl)	183°C
Time Maintained Above: Time (tL)	60-150 seconds
Peak/Classification Temperature (Tp)	225°C
Time Within 5°C of Actual Peak Temperature (Tp)	10-30 seconds
Ramp-Down Rate	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.

Note:

All temperatures refer to topside of the package, measured on the package body surface.

Dimensions For Cannulation And Packaging

Quantity:1000 PCS

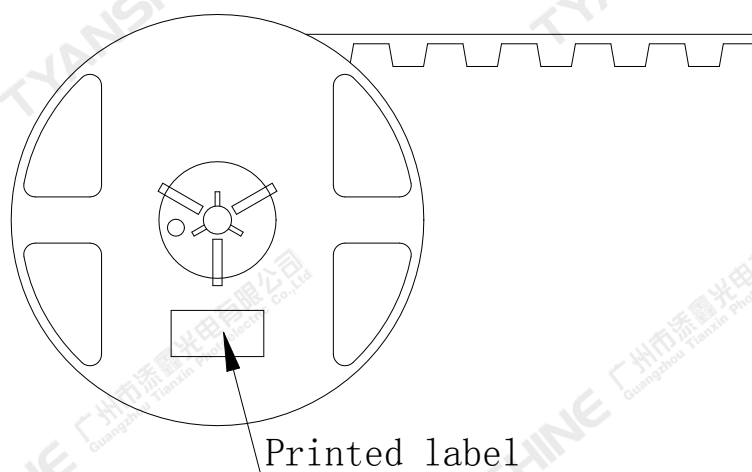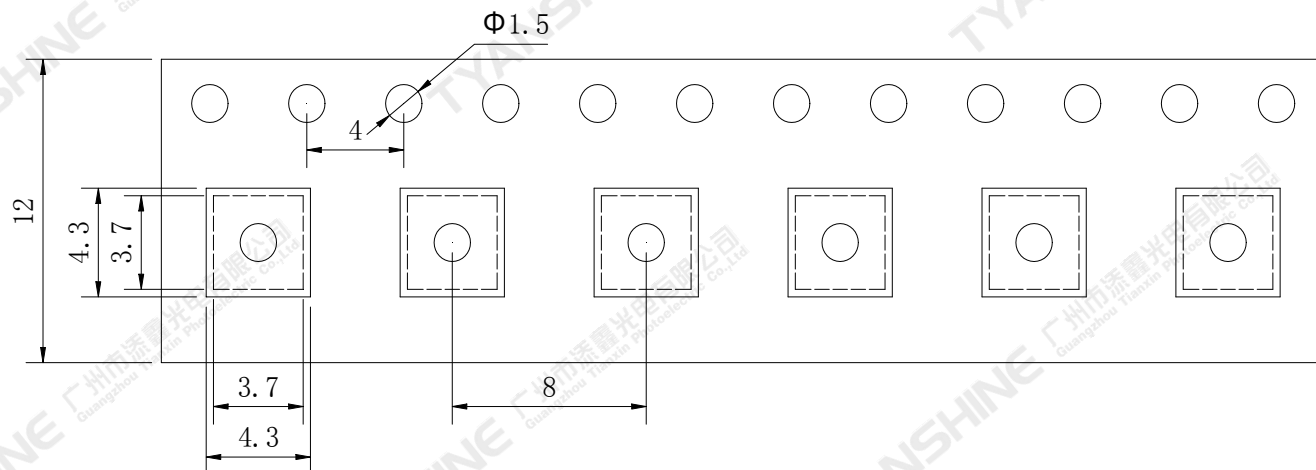**Notes:**

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

Part No.	TX-3535W5FC120-OGVCND34-D06	Spec No.	WKF-ED0051	Page	9 of 9
----------	-----------------------------	----------	------------	------	--------