

For reference only. See data sheet for the detailed specifications.

Technical Specification




EIA WR	WR34
Frequency Range(GHz)	22.0 - 33.0
Coupling(dB)	30
Coupling Accuracy(dB)	±1.0 Max.
Frequency Sensitivity(dB)	±1.0 Max.
Directivity(dB)	18 Min.
Mainline VSWR	1.10:1 Max.
Secondline VSWR	1.35:1 Max.
Flange	FBP260(UBR260)
Coupling Port	2.92mm-Female or 2.92mm-Male
Material	Cu
Size(mm)	67.31 x 55.88 x 31.8
Net Weight(Kg)	0.06 Around


Outline Drawing (Size: mm)

Coupling Port: 2.92mm-Female

For 2.92mm-Male connector Coupling Port outline drawing, please contact A-INFO.

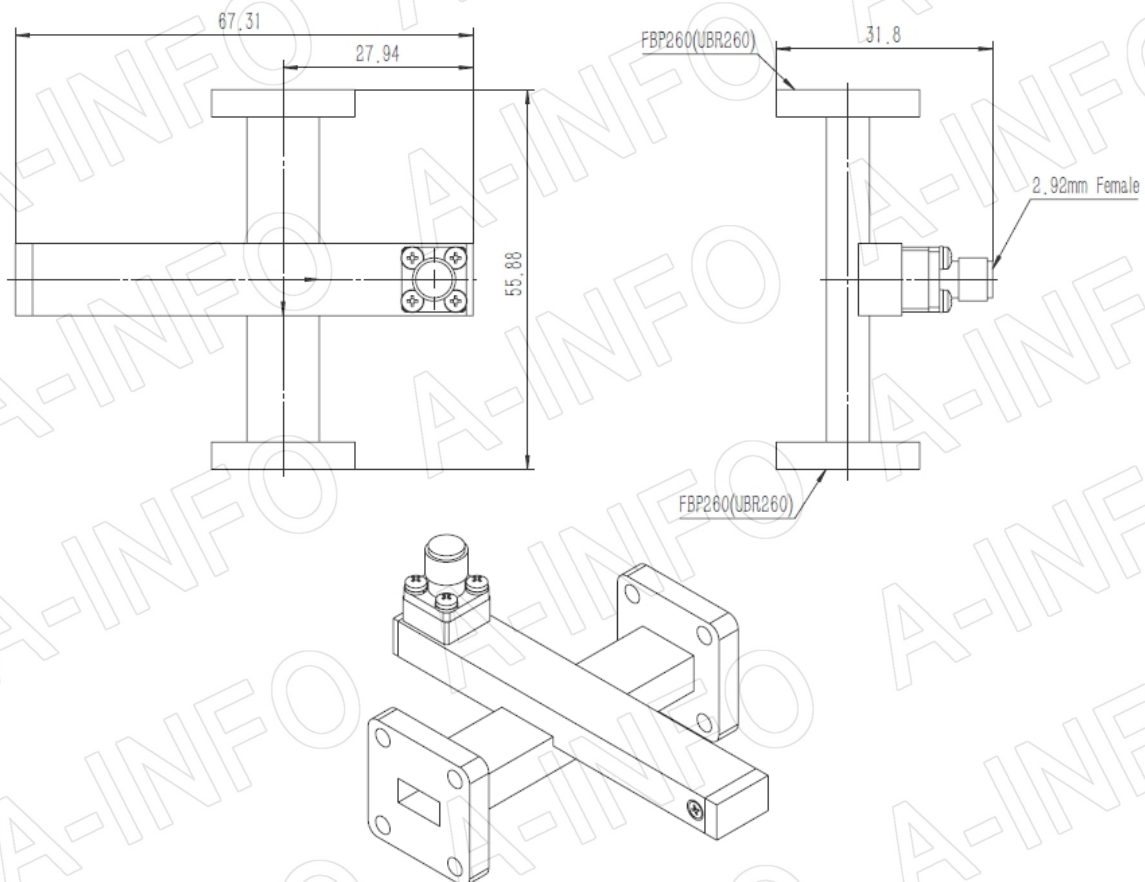


Flange Drawing (Size: mm)

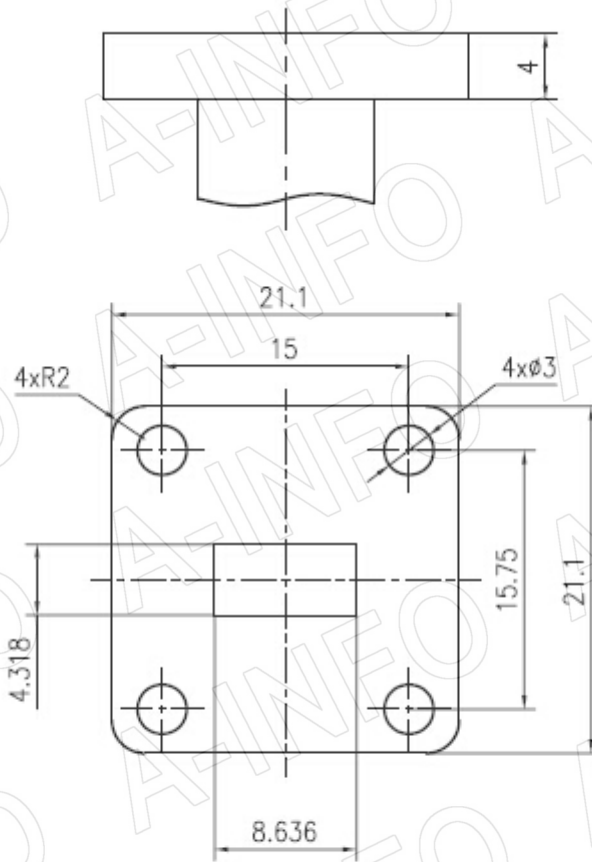


FBP260

Test Results


Coupling

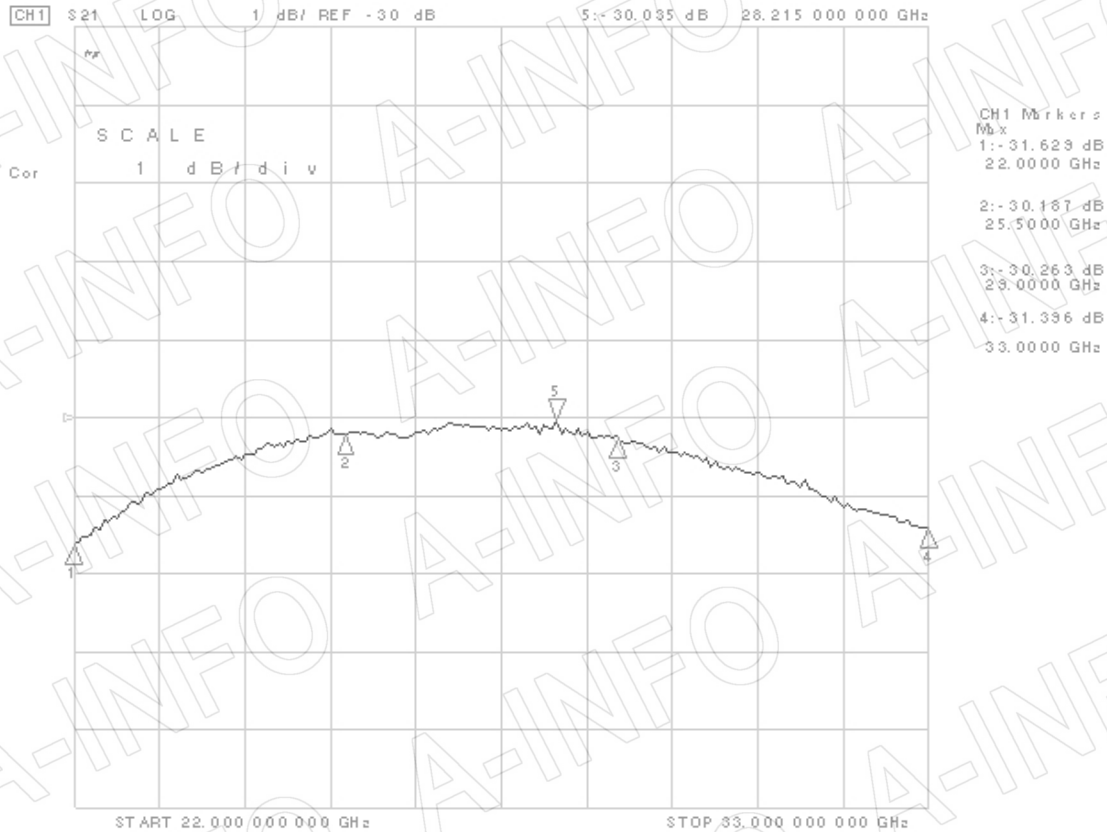

Directivity

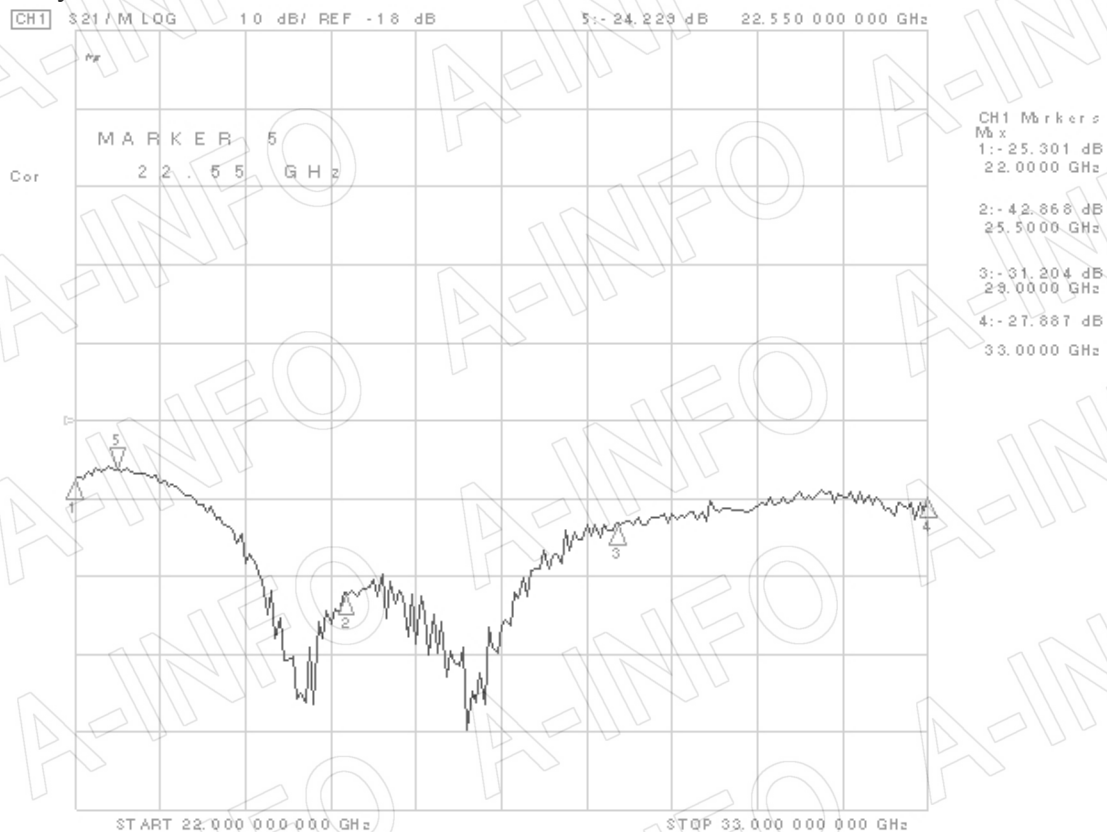

Mainline VSWR

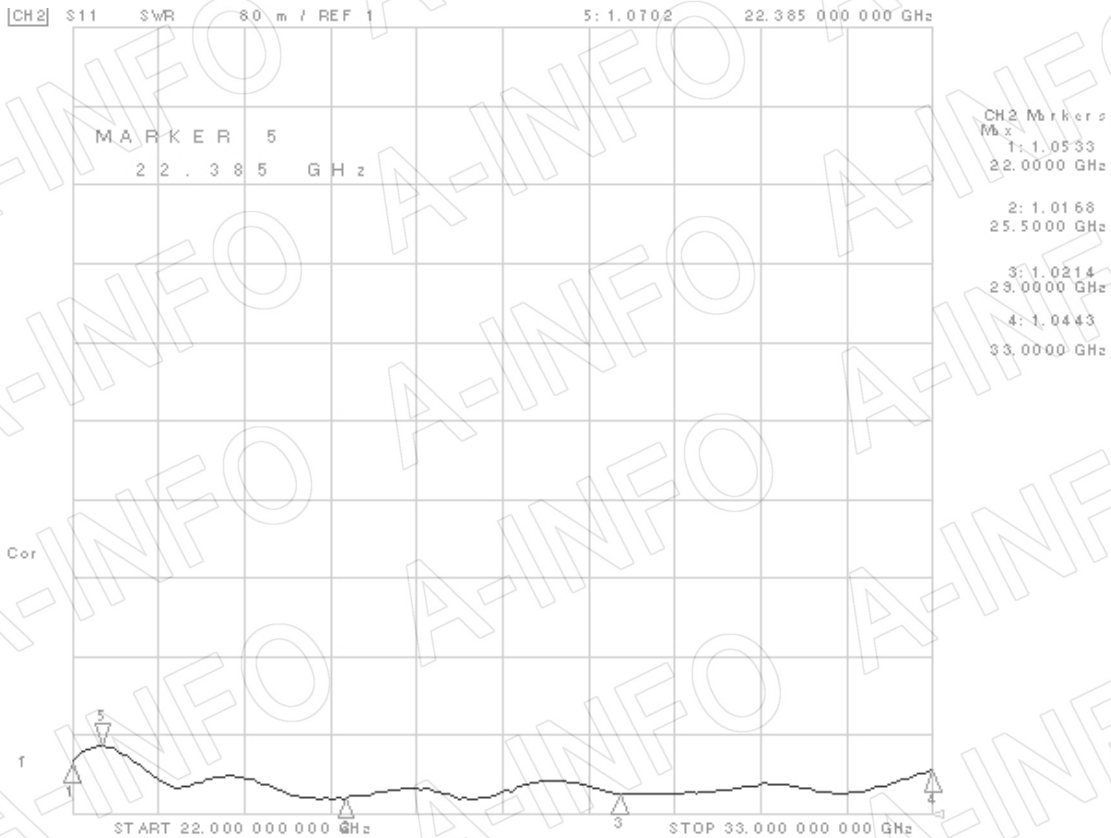

Secondline VSWR

