
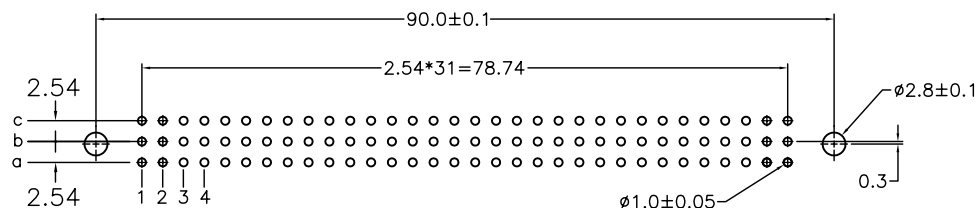
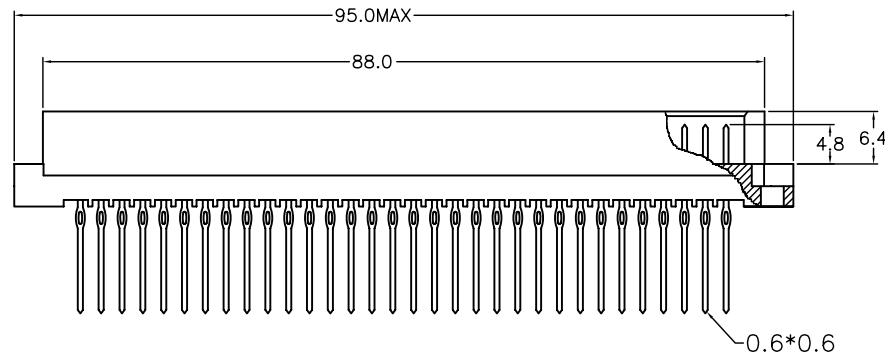


REV.	SPECIFICATION	ECN NO.	APPD.

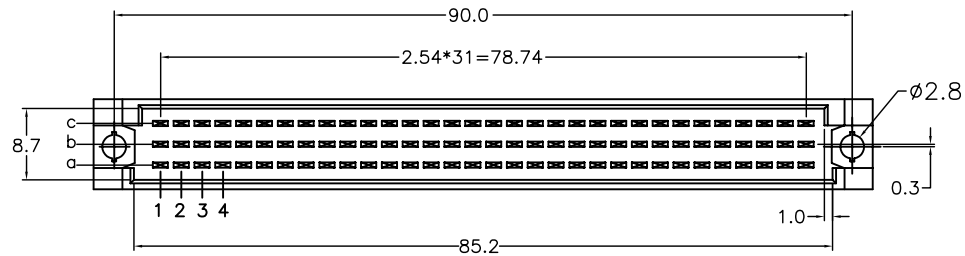

P.C. Board Layout

(A2)

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 AMP.


Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩmin. at DC 500V.

Contact Resistance: 30mΩmax. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

*RoHS Compliant



(A2)

Series 9001- 1 3 XX * G ** P A
 1: 2.54mm
 3: Male
 Position
 1: Dip Length
 2: Dip Length
 W1: Dip Length
 W2: Dip Length
 A: Tray Package
 P: Press Fit
 00: G/F
 10: 10 μ"
 15: 15 μ"
 30: 30 μ"
 G: Gold

Pitch	Position	Rows with Contacts	Contact Arrange	X length				P/N
				1 4.0	2 2.5	W1 13	W2 17	
2.54mm	96	a b c						9001-1396*G**PA
	64	a - c						9001-1364*G**PA
	32	a - -						9001-1332*G**PA

Tolerances	Drawn No.	9001D13074
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Wangcr9/20'06

Title: 9001 Series
 DIN41612 R Type Male
 Press Fit

OUPIN

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 9001-13XX*G**PA

SHEET	1/1	Ver.No.	A2
-------	-----	---------	----