

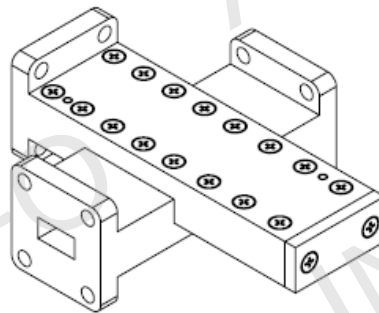


## Technical Specification

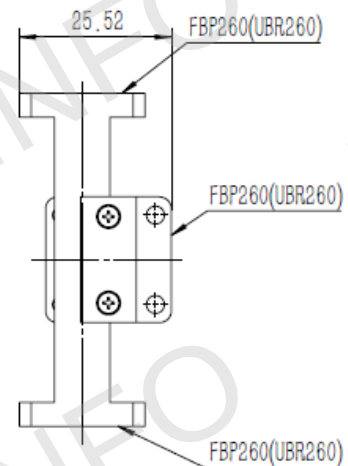


|                           |                |
|---------------------------|----------------|
| EIA WR                    | WR34           |
| Frequency Range(GHz)      | 22.0-33.0      |
| Coupling(dB)              | 20             |
| Coupling Accuracy(dB)     | $\pm 0.7$      |
| Frequency Sensitivity(dB) | $\pm 1.0$      |
| Directivity(dB)           | 12 Min.        |
| Mainline VSWR             | 1.2 Max.       |
| Secondline VSWR           | 1.25 Max.      |
| Flange                    | FBP260(UBR260) |
| Material                  | Cu             |
| Net Weight(Kg)            | 0.16 Around    |

## Outline Drawing (Size: mm)

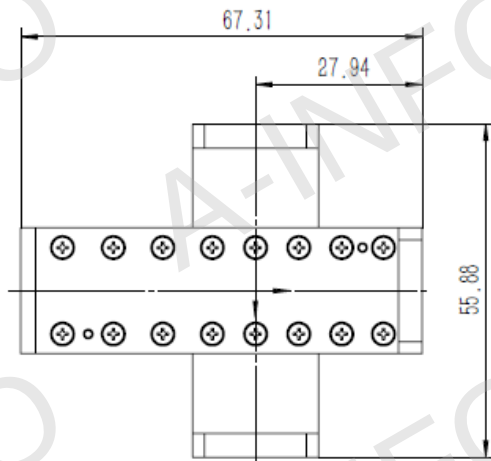


## Flange Drawing (Size: mm)

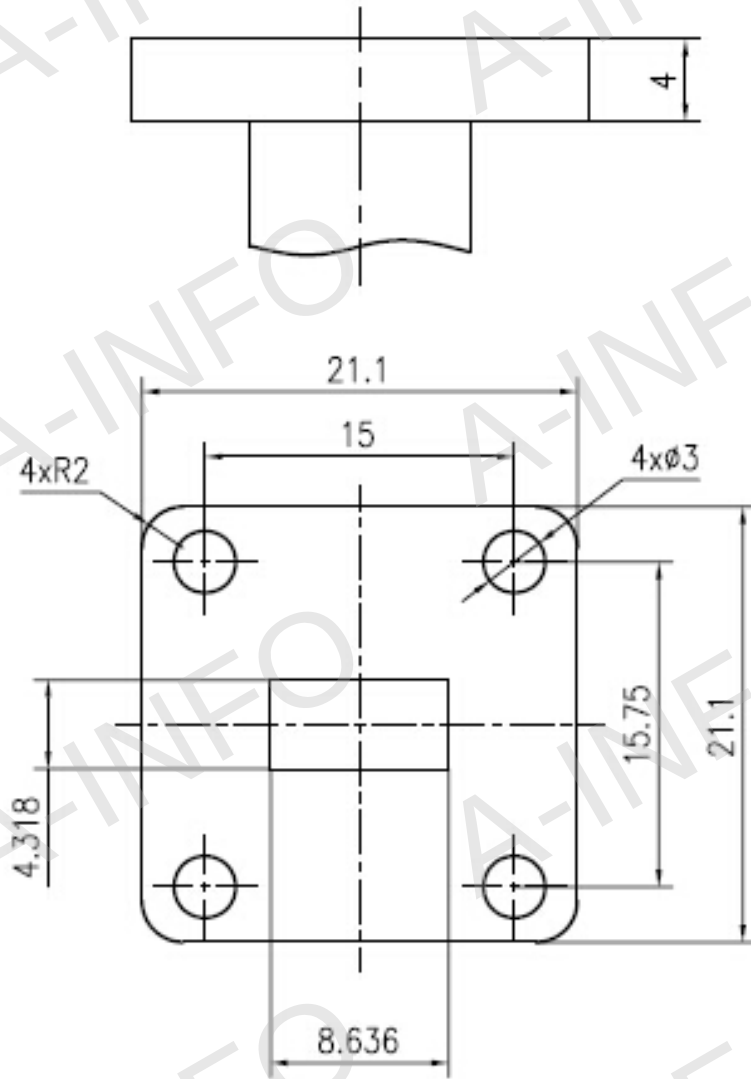


FBP260

## Test Results


### Coupling

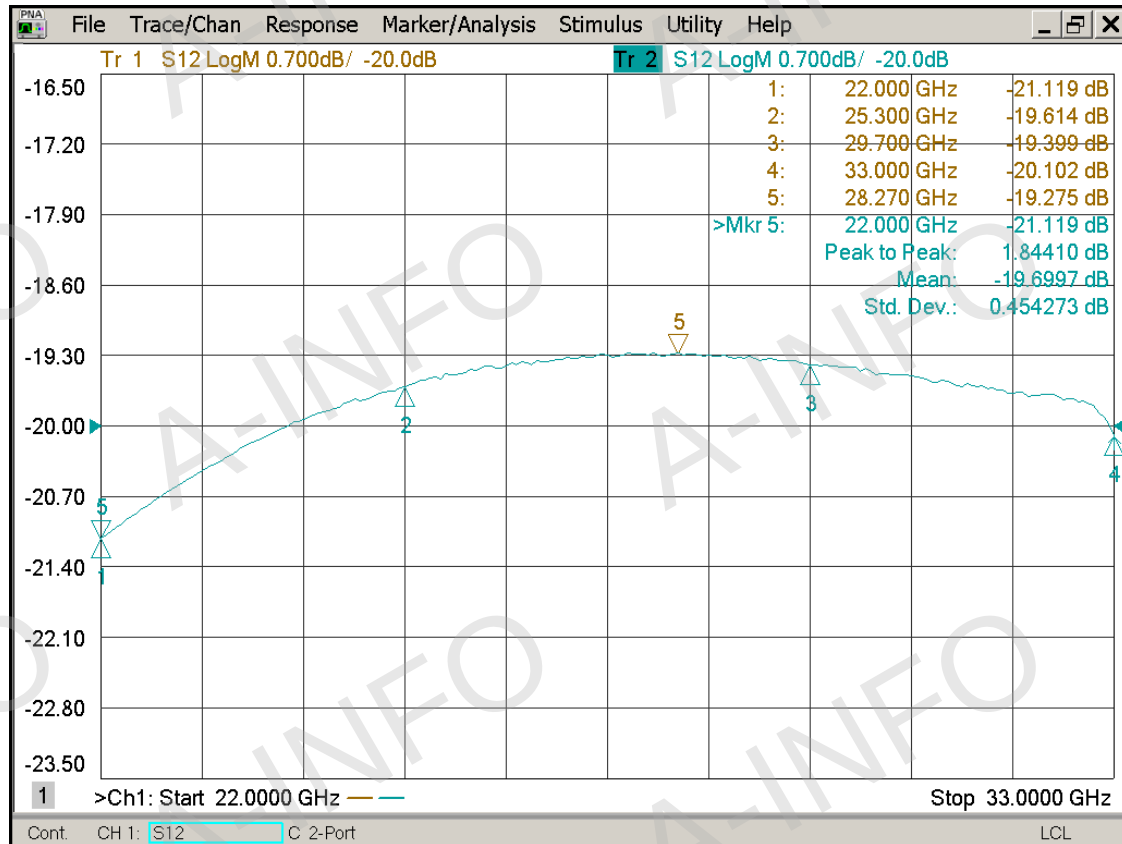

### Directivity

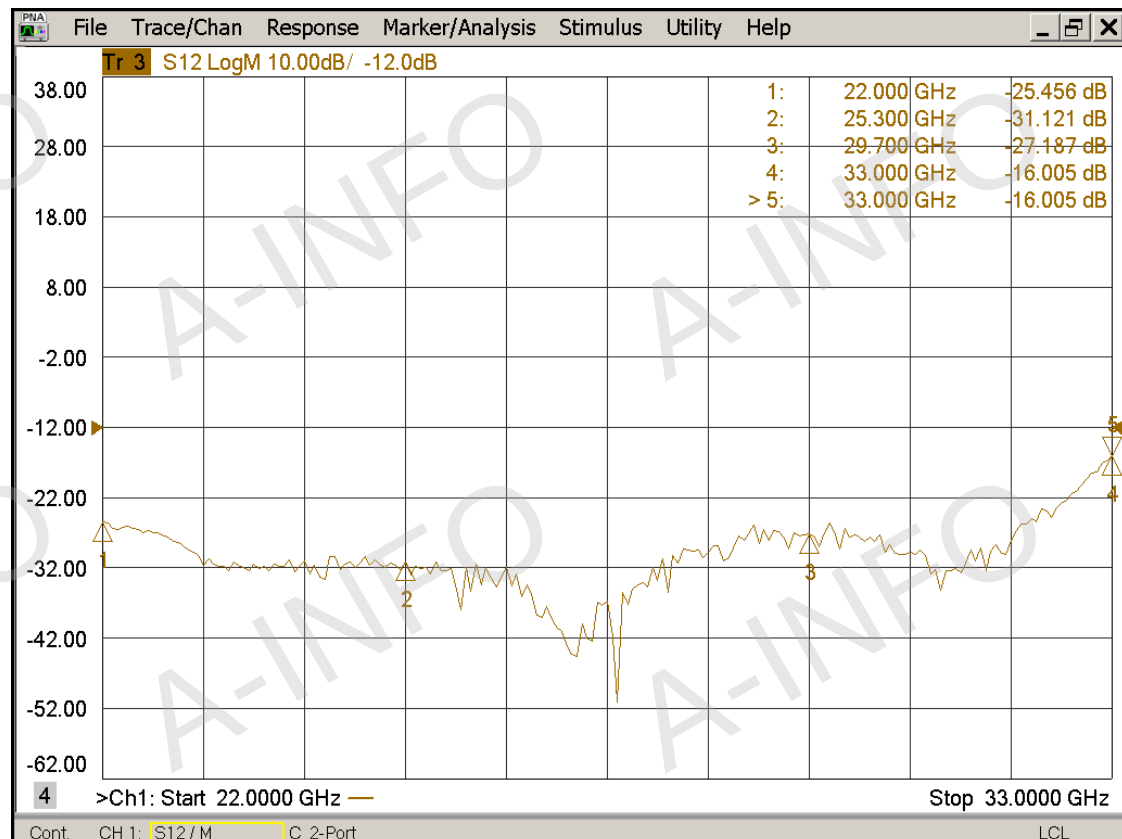

## Mainline VSWR

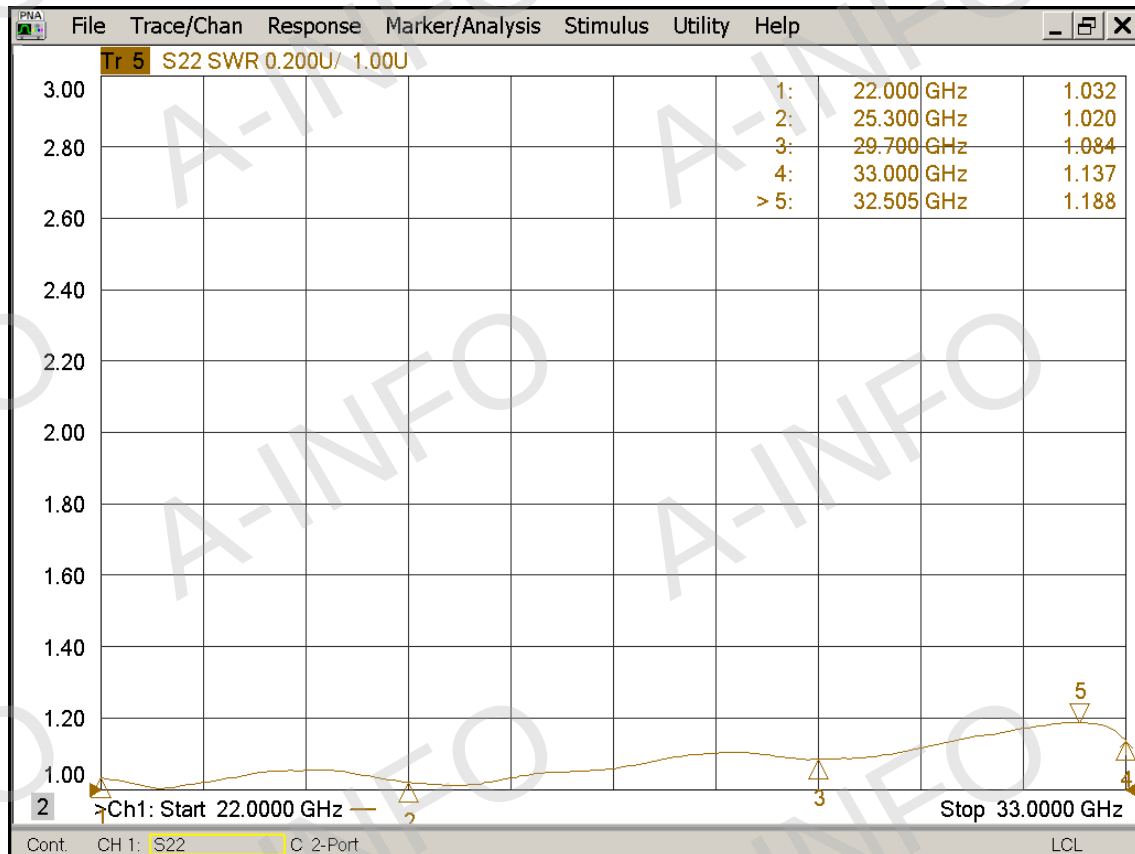

## Secondline VSWR

