

Recommended EMI/EMC Filter NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series

* The EMI/EMC Filter is recommended to connect with several devices.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *7
- C : with Coating
- G : Low leakage current
- V : External potentiometer for output voltage adjustment
- U : Low input voltage stop (Complies with SEMI F-47)
- R : Remote on/off (Required external power source)
- F4: Low speed fan
- T2: Horizontal terminal block (non-screw-hold type)

See 5.1 in Instruction Manual.

SPECIFICATIONS

	MODEL	PLA300F-5	PLA300F-12	PLA300F-15	PLA300F-24	PLA300F-36	PLA300F-48
INPUT	VOLTAGE[V]	AC85 - 264 1 ϕ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3 (DC input and AC265 - 277V input *3)					
	CURRENT[A]	ACIN 100V	3.1typ (Io=90%)	3.4typ (Io=90%)			
		ACIN 115V	3.0typ (Io=100%)	3.3typ (Io=100%)			
		ACIN 230V	1.5typ (Io=100%)	1.7typ (Io=100%)			
	FREQUENCY[Hz]	50 / 60 (47 - 63) (DC input and 440Hz *3)					
	EFFICIENCY[%]	ACIN 100V	73typ (Io=90%)	78typ (Io=90%)	80typ (Io=90%)	84typ (Io=90%)	84typ (Io=90%)
		ACIN 115V	74typ (Io=100%)	78typ (Io=100%)	80typ (Io=100%)	84typ (Io=100%)	84typ (Io=100%)
		ACIN 230V	77typ (Io=100%)	81typ (Io=100%)	83typ (Io=100%)	87typ (Io=100%)	87typ (Io=100%)
	POWER FACTOR	ACIN 100V	0.98typ (Io=90%)				
		ACIN 115V	0.98typ (Io=100%)				
		ACIN 230V	0.95typ (Io=100%)				
	INRUSH CURRENT[A]	ACIN 100V	20typ (Io=90%) Ta=25°C at cold start				
		ACIN 115V	20typ (Io=100%) Ta=25°C at cold start				
		ACIN 230V	40typ (Io=100%) Ta=25°C at cold start				
	LEAKAGE CURRENT[ma]	0.75max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC60950-1 and DEN-AN)					
OUTPUT	VOLTAGE[V]	5	12	15	24	36	48
	CURRENT[A]	ACIN 85-115V	Output derating is required at ACIN 115V or less (refer to instruction manual 3.2)				
		ACIN 115V-264V	50	25	20	12.5	8.4
	WATTAGE[W]	ACIN 85-115V	Output derating is required at ACIN 115V or less (refer to instruction manual 3.2)				
		ACIN 115V-264V	250	300	300	300	302.4
	LINE REGULATION[mV] *4	20max	48max	60max	96max	144max	192max
	LOAD REGULATION[mV] *4	40max	100max	120max	150max	150max	300max
	RIPPLE[mVp-p] *1	0 to +50°C	80max	120max	120max	150max	150max
		-10 to 0°C	140max	160max	160max	160max	400max
	RIPPLE NOISE[mVp-p] *1	0 to +50°C	120max	150max	150max	200max	200max
		-10 to 0°C	160max	180max	180max	240max	500max
	TEMPERATURE REGULATION[mV]	0 to +50°C	50max	120max	150max	240max	360max
		-10 to +50°C	75max	180max	180max	290max	440max
	DRIFT[mV] *2	20max	48max	60max	96max	144max	192max
	START-UP TIME[ms]	300typ (ACIN 115V, Io=100%)					
	HOLD-UP TIME[ms]	20typ (ACIN 115V, Io=100%)					
PROTECTION CIRCUIT AND OTHERS	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.50 to 5.50	10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	32.40 to 39.60	43.20 to 52.80
	OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically					
	OVERVOLTAGE PROTECTION[V]	5.75 to 7.00	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	41.40 to 50.40	55.20 to 67.20
	OPERATING INDICATION	LED (Green)					
ISOLATION	REMOTE SENSING	Not provided					
	REMOTE ON/OFF	Optional (Required external power source. Option -R)					
	INPUT-OUTPUT • RC *10	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At room temperature)					
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At room temperature)					
	OUTPUT • RC-FG *10	AC500V 1minute, Cutoff current = 100mA, DC500V 50M Ω min (At room temperature)					
ENVIRONMENT	OUTPUT-RC *10	AC500V 1minute, Cutoff current = 100mA, DC500V 50M Ω min (At room temperature)					
	OPERATING TEMP., HUMID. AND ALTITUDE *5	-20 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max					
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max					
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes					
SAFETY AND NOISE REGULATIONS	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axes					
	AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178 Complies with DEN-AN					
	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B					
HARMONIC ATTENUATOR *9		Complies with IEC61000-3-2 class A					

SPECIFICATIONS

OTHERS	CASE SIZE/WEIGHT	102 X 41 X 190mm [4.02 X 1.61 X 7.48 inches] (Excluding terminal block and screw) (W X H X D) / 1.0kg max	
	COOLING METHOD	*8	Forced cooling (internal fan)
WARRANTY	WARRANTY	*6	5 years (subject to the operating conditions)

*1 This is the result of measurement of the testing board with capacitors of 22 μ F and 0.1 μ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103.
See 1.6 of Instruction Manual for more details.

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25 $^{\circ}$ C.

*3 Output power derating is required. Consult us if the power supply needs to be used for DC input, 440Hz input or AC265-277V input.

*4 Consult us about dynamic load and input response.

*5 Output power derating is required. See 3.2 in Instruction Manual.

*6 See 3.3 in Instruction Manual for more details.

*7 Consult us about safety agency approvals for the models with optional functions.

*8 The fan speed slows down at no load.

*9 Consult us about other classes.

*10 The RC terminal is added to option -R models. The RC terminal is isolated from input, output, and FG.

* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.


* Parallel operation is not possible with this mode.

* Sound noise may be heard from the power supply when used for pulse load.

Features


- Cost-effective
- Longer life (see Instruction Manual)
- Low profile (meets 1U height = 41 mm or 1.61 inches)
- Wide operating temperature range (-20 $^{\circ}$ C to +70 $^{\circ}$ C see instruction manual)
- Screw hold type terminal block
- Slow fan speed at no load
- Many optional functions
- Complies with SEMI F-47 (-U option, see Instruction Manual for details)

Block diagram

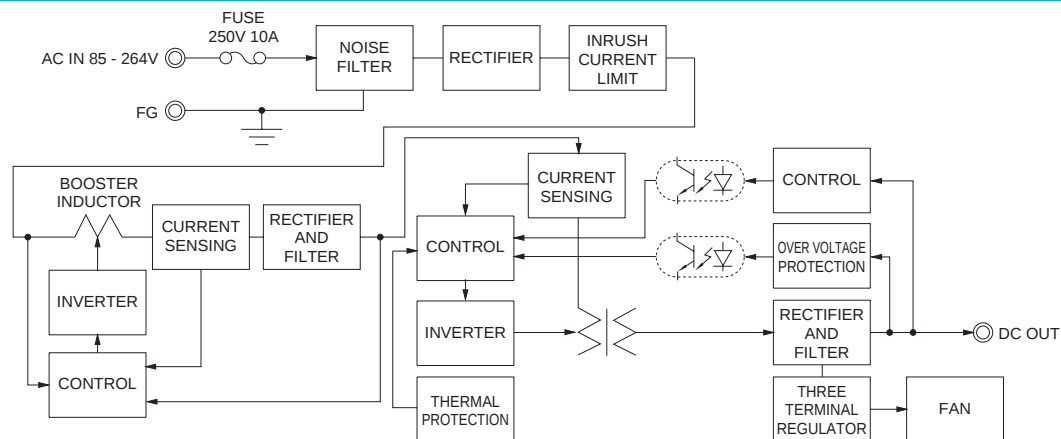

External view

The external size of -V option, -R option, and -T2 option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

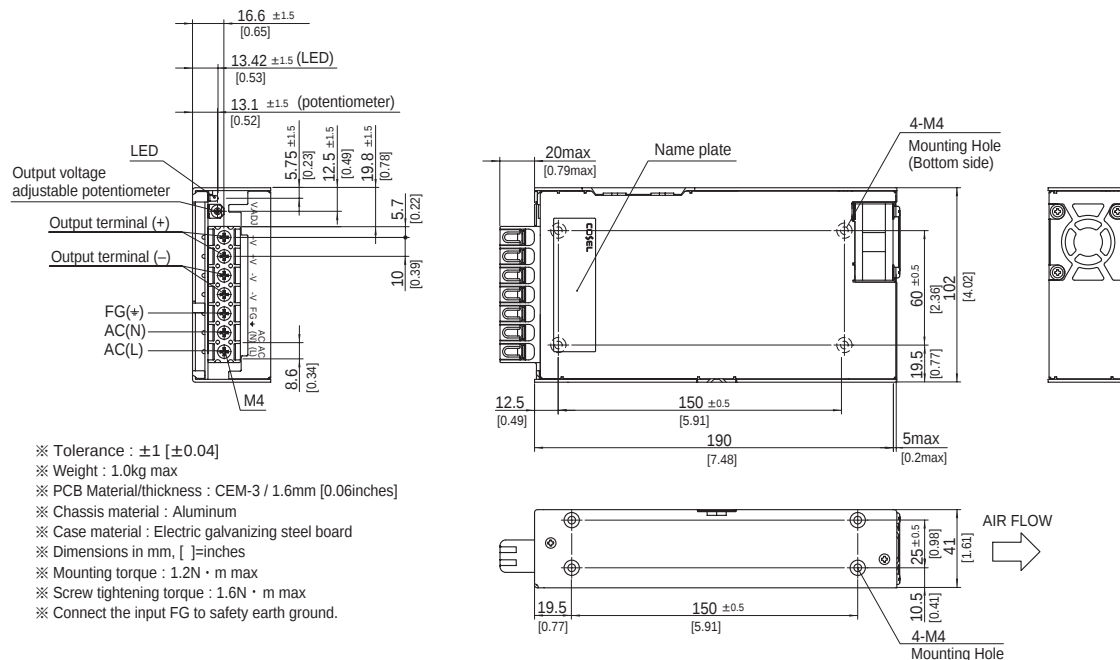



Макро Групп – это:

- дистрибьютор электронных компонентов с 1994 года
- контрактный производитель электроники с 2007 года с собственным производством в Санкт-Петербурге (компания Макро ЕМС, входит в ГК Макро Групп)
- поставщик полупроводниковых материалов
- комплексный поставщик электронных компонентов
- моделирование и производство полупроводниковых эпитаксиальных гетероструктур для задач оптоэлектроники

Головной офис расположен в Санкт-Петербурге. Собственные представительства в крупных промышленных городах России и стран СНГ.

Преимущества для наших заказчиков:

- работа по тендерам с 2012 года
- оформление банковских гарантий
- отсрочки платежей
- поставка электронных компонентов по проектным ценам
- инженерная поддержка проектов заказчиков
- сертификат системы менеджмента качества ISO 9001-2015
- необходимые сертификаты и лицензии

Данный файл получен с сайта www.macrogroup.ru