

TX-3535A3FC120-OGFEND34-01

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under 1000mA.
- ◆High luminous output.
- ◆No UV.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆GaN

Emitting Color:


- ◆ PC Amber (A)

Applications:


- ◆ Portable Flashlight
- ◆ Garden lighting
- ◆ General Lighting

Part No.	TX-3535A3FC120-OGFEND34-01	Spec No.	WKF-ED0030	Page	1 of 9
----------	----------------------------	----------	------------	------	--------


Package Dimensions:

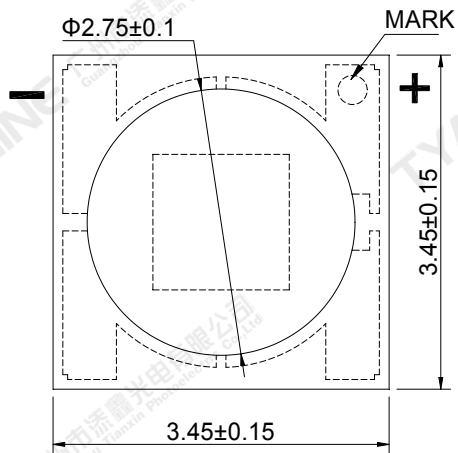


Top view

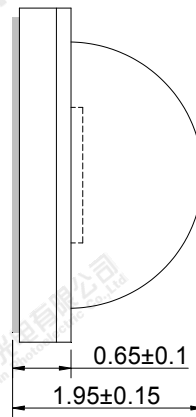


Side view

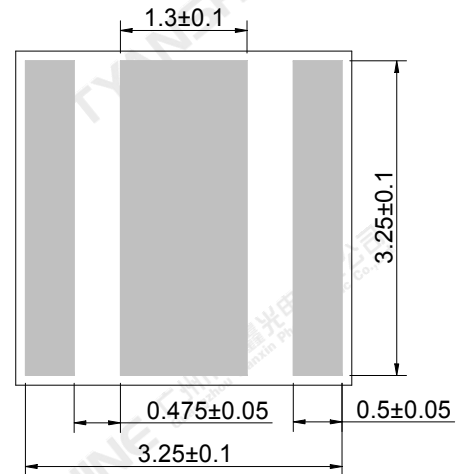

Bottom view

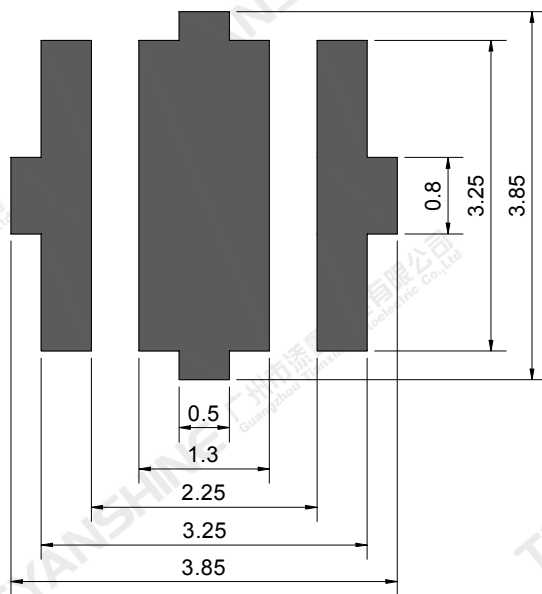

Recommended solder pad

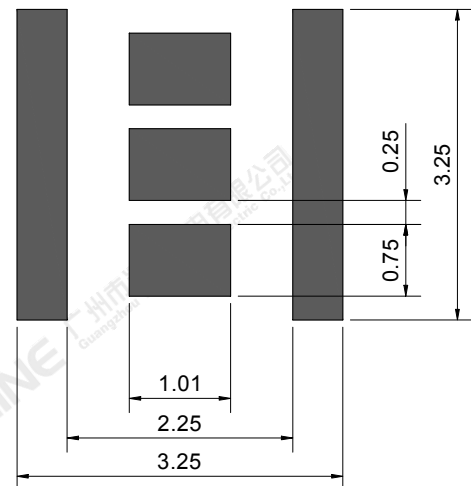

Recommended stencil pattern

Notes:

1. All dimensions are in millimeters .
2. Tolerances unless otherwise mentioned are $\pm 0.1\text{mm}$.

Absolute Maximum Ratings (Tc=25℃)

Parameter	Symbol	Ratings	Unit
Forward Current	IF	1000	mA
Reverse Voltage	V _R	7	V
Reverse Current	I _R	5	μA
Power Dissipation	P _D	3500	mW
Junction Temperature	T _j	150	℃
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	T _{stg}	-40~+70	℃
Operation Temperature	T _{opr}	-30~+85	

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Luminous Flux	Φ_v	If=350mA	90	130	—	lm
Correlated Colour Temperature	CCT		1840	1930	2050	K
Forward Voltage	V_f		2.7	3.1	3.5	V
Peak Emission Wavelength	λ_p		297	600	603	nm
Dominant Wavelength	λ_d		585	588	591	nm
Spectral Line Half-Width	$\Delta\lambda$		70	80	90	nm
Viewing Angle at 50 % IV	$2\theta_{1/2}$		—	120	—	Deg
Reverse Current	I_R	7V	—	—	5	μA
Thermal Resistance Junction to Case	$R\theta_{J-C}$	—	—	6.0	—	K/W
Temperature Coefficient of Voltage	$V\Delta F/T$	If=350mA	—	-1.3	—	mV/°C

White light Color coordinate filing (IF=350mA)

Region	CCT Range		X1	Y1	X2	Y2	X3	Y3	X4	Y4
	Min	Max								
W	1840K	1965K	0.5690	0.4284	0.5598	0.4258	0.5508	0.4340	0.5581	0.4376
W2	1965K	2050K	0.5581	0.4376	0.5508	0.4340	0.5443	0.4402	0.5512	0.4447

Notes:


- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance:±15%.
- 4.Forward voltage measurement tolerance:±0.15V.

Part No.	TX-3535A3FC120-OGFEND34-01	Spec No.	WKF-ED0030	Page	4 of 9
----------	----------------------------	----------	------------	------	--------


Typical Electrical/Optical Characteristics Curves



(25°C Ambient Temperature Unless Otherwise Noted)



Forward Current VS. Forward Voltage

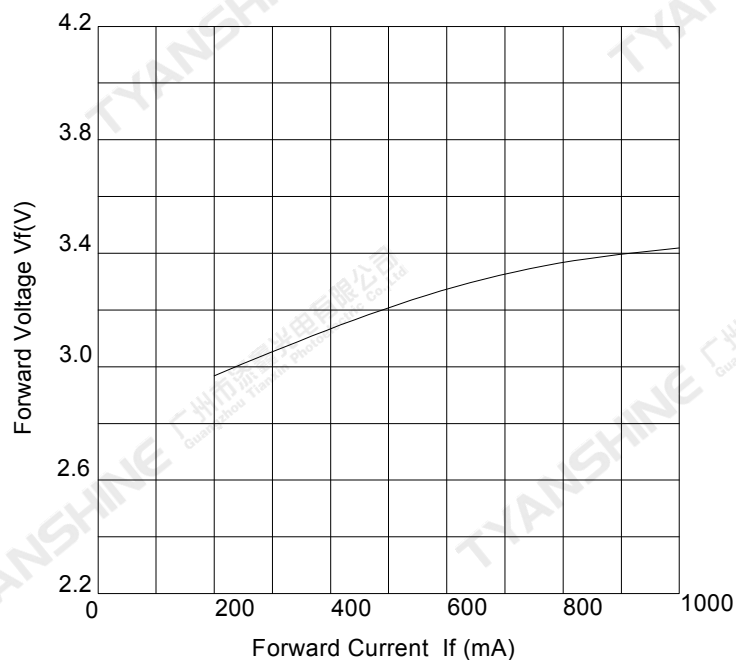

Forward Current VS. Luminous flux

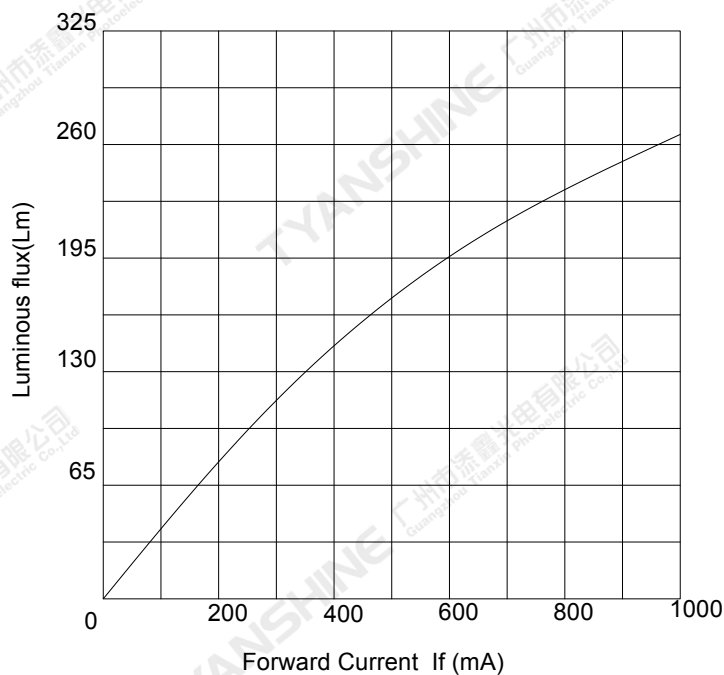

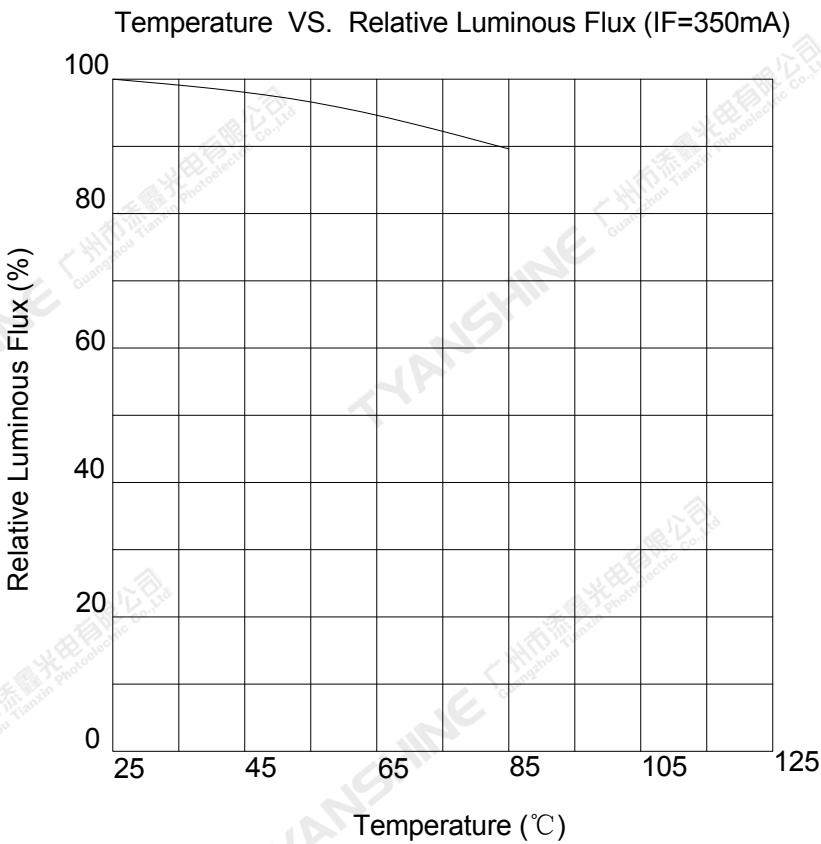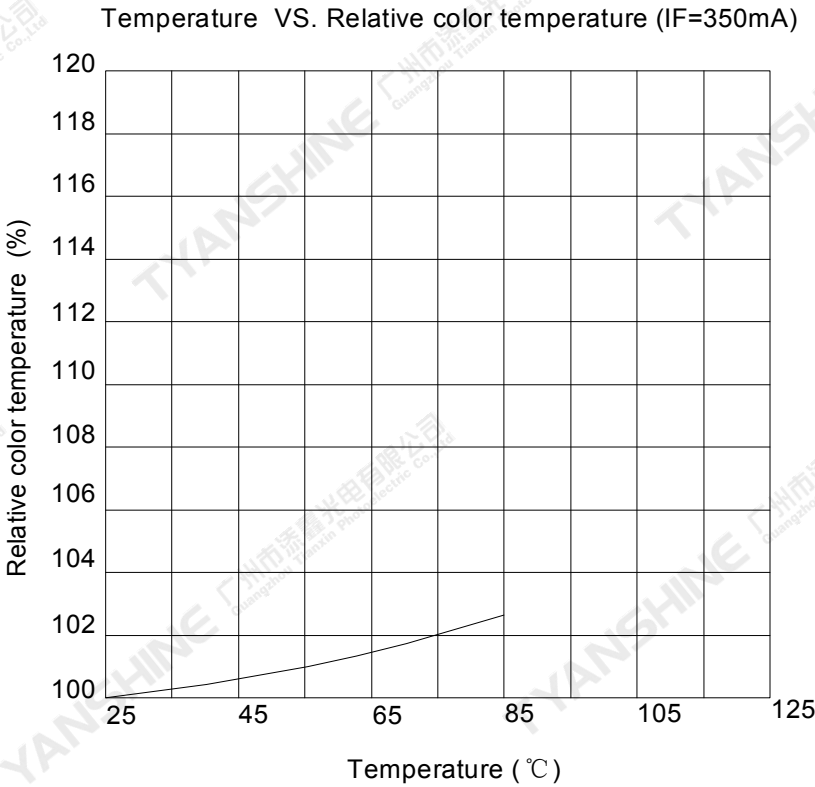

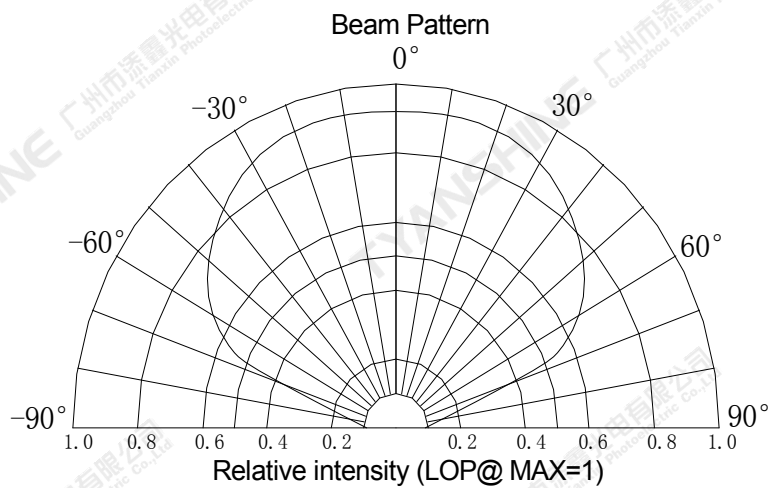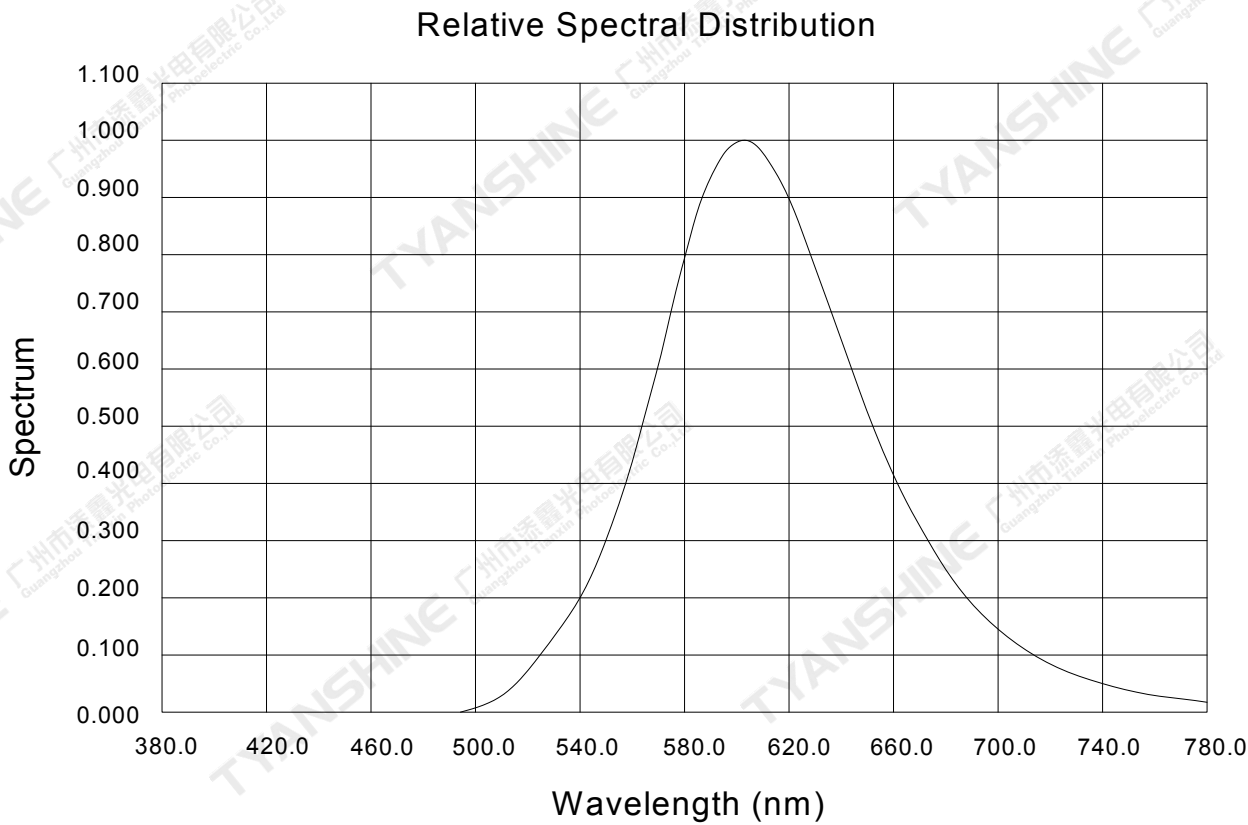

Notes:

1. 2θ 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 5°.

Part No.	TX-3535A3FC120-OGFEND34-01	Spec No.	WKF-ED0030	Page	7 of 9
----------	----------------------------	----------	------------	------	--------

Usage Precautions


Storage Environment Condition

Temperature: 5°C ~ 30°C (41°F ~ 86°F)

Humidity: 60% RH Max.

Soldering Condition

Use the conditions shown to the under figure.

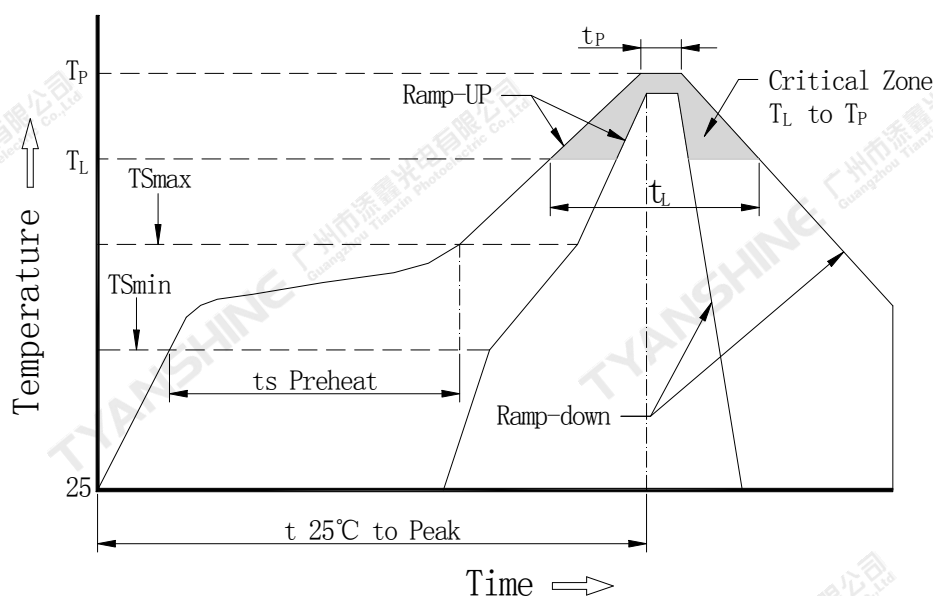



Profile Feature	Lead-Based Solder
Average Ramp-Up Rate (T_{Smax} to T_P)	3°C/second max.
Preheat: Temperature Min (T_{Smin})	100°C
Preheat: Temperature Max (T_{Smax})	150°C
Preheat: Time (T_{Smin} to T_{Smax})	60-120 seconds
Time Maintained Above: Temperature (T_L)	183°C
Time Maintained Above: Time (T_L)	60-150 seconds
Peak/Classification Temperature (T_P)	225°C
Time Within 5°C of Actual Peak Temperature (T_P)	10-30 seconds
Ramp-Down Rate	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.

Note:

All temperatures refer to topside of the package, measured on the package body surface.

Dimensions For Cannulation And Packaging

Quantity:1000 PCS

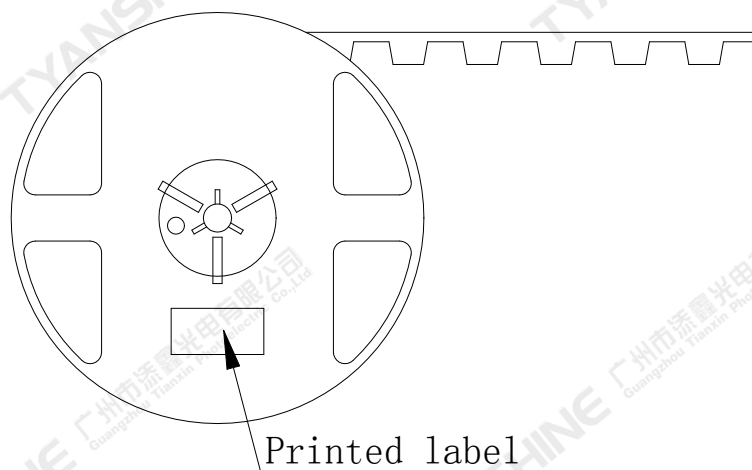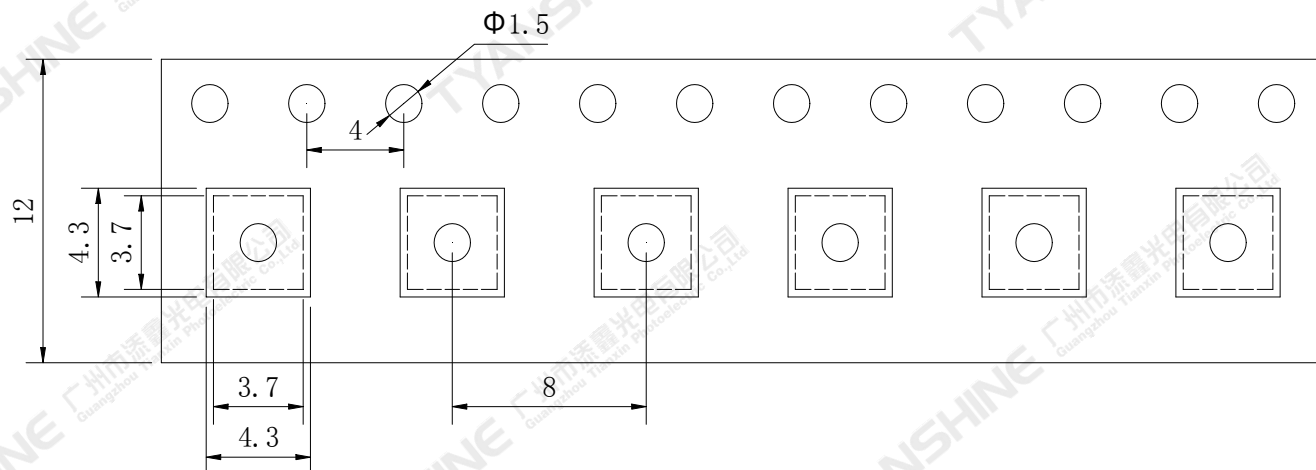**Notes:**

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

Part No.	TX-3535A3FC120-OGFEND34-01	Spec No.	WKF-ED0030	Page	9 of 9
----------	----------------------------	----------	------------	------	--------