



Front View



Side View

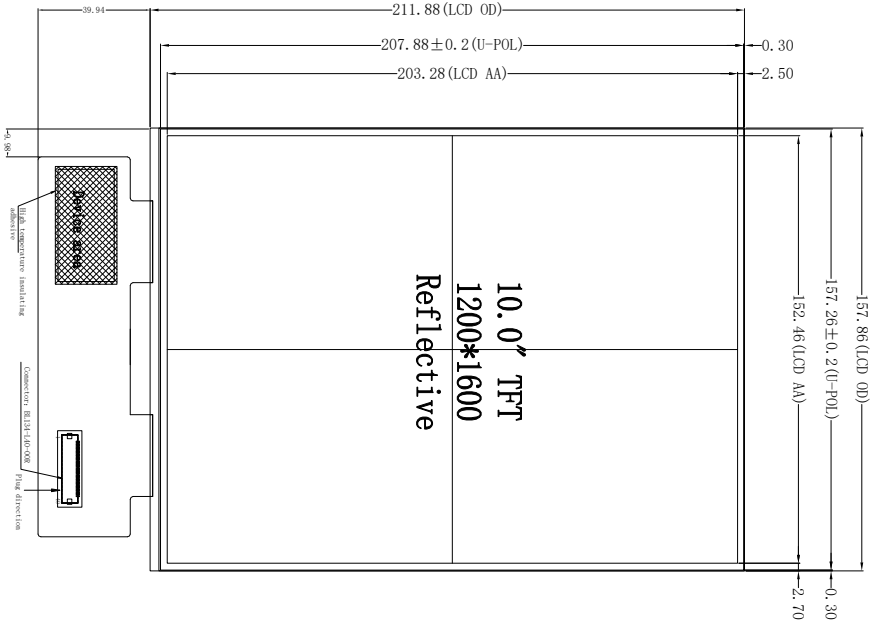

Back View

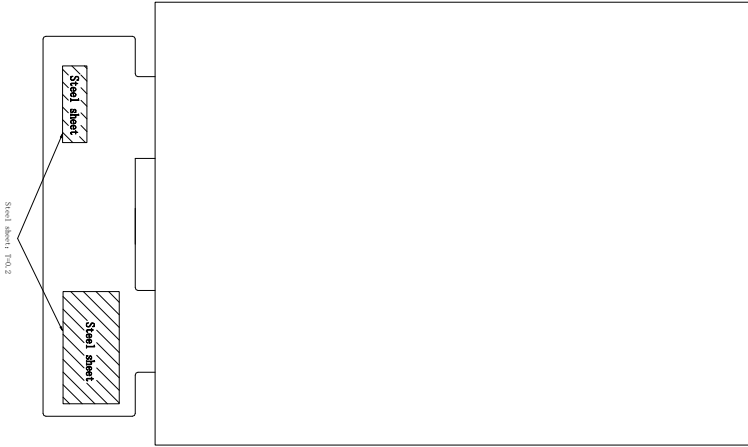

PIN	SYMBOL
1	NC
2	VDD1N
3	VDD1N
4	GND
5	RESET
6	NC
7	GND
8	MIPI_D0N
9	MIPI_D0P
10	GND
11	MIPI_D1N
12	MIPI_D1P
13	GND
14	MIPI_CKN
15	MIPI_CKP
16	GND
17	MIPI_D2N
18	MIPI_D2P
19	GND
20	MIPI_D3N
21	MIPI_D3P
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	NC
29	NC
30	GND
31	LEDK
32	LEDK
33	NC
34	ID
35	NC
36	NC
37	NC
38	NC
39	LEDA
40	LEDA

Notes:

1. Display : 10.0", TFT
2. Resolution: 1200xRGBx1600
3. LCD Viewing Direction: 60/60/60/60
4. Drive IC:HX8279D+HX8279D
5. Display Mode: Normally White/Reflective
6. unmark Tolerance:±0.2
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. Requirements on Environmental Protection: ROHS

3	
2	
1	
0	NEW
REV	DESCRIPTION

				LEADTEK COMPANY LIMITED			
SCALE: 1/1		UNIT: mm		PAGE: 1/1			
Part No:		LTK100UXML10		VER: V0		Approve	
Customer No:						JONA	
DATE		2023.07.19		IAN		Drawn	
REV						IAN	