


DESCRIPTION:
3W 3KVDC Isolated Single & Dual Output DC/DC Converters

The TPH-3W series are miniature, isolated 2W DC/DC converters in a SIP and DIP package. They offer the ideal solution in many space critical applications for board level power distribution. The internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise and 3KVDC isolation.

FEATURES

RoHS compliant	Efficiency up to 86%	Power density up to 1.44W/cm ³
Operating temperature: -40°C to 105°C	Dual output from a single input rail	UL 94V-0 package material
Power sharing on output	3KVDC isolation	Industry standard pinout
Input voltage: 3.3V, 5V, 12V, 15V, 24V, 48V	Output voltage: $\pm 5V, \pm 9V, \pm 12V, \pm 15V, \pm 24V$ / 3.3V, 5V, 9V, 12V, 15V, 24V	CE certification

SELECTION GUIDE

Part Number	Nominal Input Voltage	Output Voltage	Output Current (Max./Min)	Efficiency	Package Style
	V	V	mA	%	
TPH0505D-3W	5	± 5	$\pm 300/\pm 30$	80	DIP
TPH0509D-3W	5	± 9	$\pm 166.5/\pm 16.65$	80	DIP
TPH0512D-3W	5	± 12	$\pm 125/\pm 12.5$	81	DIP
TPH0515D-3W	5	± 15	$\pm 100/\pm 10$	84	DIP
TPH0505S-3W	5	± 5	$\pm 300/\pm 30$	80	SIP
TPH0509S-3W	5	± 9	$\pm 166.5/\pm 16.65$	80	SIP
TPH0512S-3W	5	± 12	$\pm 125/\pm 12.5$	82	SIP
TPH0515S-3W	5	± 15	$\pm 100/\pm 10$	83	SIP
TPH0524S-3W	5	± 24	$\pm 62.5/\pm 6.25$	84	SIP
TPH1205D-3W	12	± 5	$\pm 300/\pm 30$	80	DIP
TPH1209D-3W	12	± 9	$\pm 166.5/\pm 16.65$	83	DIP
TPH1212D-3W	12	± 12	$\pm 125/\pm 12.5$	84	DIP
TPH1215D-3W	12	± 15	$\pm 100/\pm 10$	86	DIP
TPH1224D-3W	12	± 24	$\pm 62.5/\pm 6.25$	85	SIP
TPH1205S-3W	12	± 5	$\pm 300/\pm 30$	80	SIP
TPH1209S-3W	12	± 9	$\pm 166.5/\pm 16.65$	83	SIP
TPH1212S-3W	12	± 12	$\pm 125/\pm 12.5$	84	SIP
TPH1215S-3W	12	± 15	$\pm 100/\pm 10$	86	SIP
TPH1224S-3W	12	± 24	$\pm 62.5/\pm 6.25$	85	SIP
TPH1505D-3W	15	± 5	$\pm 300/\pm 30$	80	DIP
TPH1505S-3W	15	± 5	$\pm 300/\pm 30$	80	SIP
TPH1515S-3W	15	± 15	$\pm 100/\pm 10$	86	SIP
TPH2405D-3W	24	± 5	$\pm 300/\pm 30$	80	DIP
TPH2409D-3W	24	± 9	$\pm 166.5/\pm 16.65$	85	DIP
TPH2412D-3W	24	± 12	$\pm 125/\pm 12.5$	86	DIP
TPH2415D-3W	24	± 15	$\pm 100/\pm 10$	86	DIP
TPH2424D-3W	24	± 24	$\pm 62.5/\pm 6.25$	85	DIP
TPH2405S-3W	24	± 5	$\pm 300/\pm 30$	82	SIP
TPH2409S-3W	24	± 9	$\pm 166.5/\pm 16.65$	85	SIP
TPH2412S-3W	24	± 12	$\pm 125/\pm 12.5$	85	SIP
TPH2415S-3W	24	± 15	$\pm 100/\pm 10$	85	SIP
TPH2424S-3W	24	± 24	$\pm 62.5/\pm 6.25$	85	SIP
TPH4805D-3W	48	± 5	$\pm 300/\pm 30$	82	DIP
TPH4809D-3W	48	± 9	$\pm 166.5/\pm 16.65$	82	DIP
TPH4812D-3W	48	± 12	$\pm 125/\pm 12.5$	85	DIP
TPH4815D-3W	48	± 15	$\pm 100/\pm 10$	85	DIP
TPH4805S-3W	48	± 5	$\pm 300/\pm 30$	82	SIP
TPH4809S-3W	48	± 9	$\pm 166.5/\pm 16.65$	83	SIP
TPH4812S-3W	48	± 12	$\pm 125/\pm 12.5$	85	SIP
TPH4815S-3W	48	± 15	$\pm 100/\pm 10$	84	SIP

SELECTION GUIDE

Part Number	Nominal Input Voltage	Output Voltage	Output Current(Max./Min)	Efficiency	Package Style
	V	V	mA	%	
TPH0303DA-3W	3.3	3.3	909/90.9	73	DIP
TPH0305DA-3W	3.3	5	600/60	79	DIP
TPH0503DA-3W	5	3.3	909/90.9	74	DIP
TPH0505DA-3W	5	5	600/60	80	DIP
TPH0509DA-3W	5	9	333/33.3	80	DIP
TPH0512DA-3W	5	12	250/25	81	DIP
TPH0515DA-3W	5	15	200/20	84	DIP
TPH1205DA-3W	12	5	600/60	80	DIP
TPH1209DA-3W	12	9	333/33.3	83	DIP
TPH1212DA-3W	12	12	250/25	84	DIP
TPH1215DA-3W	12	15	200/20	86	DIP
TPH1224DA-3W	12	24	125/12.5	87	DIP
TPH2405DA-3W	24	5	600/60	80	DIP
TPH2409DA-3W	24	9	333/33.3	85	DIP
TPH2412DA-3W	24	12	250/25	86	DIP
TPH2415DA-3W	24	15	200/20	86	DIP
TPH2424DA-3W	24	24	125/12.5	85	DIP
TPH4805DA-3W	48	5	600/60	82	DIP
TPH4809DA-3W	48	9	333/33.3	82	DIP
TPH4812DA-3W	48	12	250/25	85	DIP
TPH4815DA-3W	48	15	200/20	85	DIP

Add suffix "P" for continuous short circuit protection, for example TPH0505SP-3W.

GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	3.3V & 5V input		90		kHz
Switching frequency	12V input		90		kHz
Switching frequency	15V input		90		kHz
Switching frequency	24V & 48V input		90		kHz

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	3.3V input	2.9	3.3	3.6	V
Voltage range	5V input	4.5	5	5.5	V
Voltage range	12V input	11	12	13	V
Voltage range	15V input	13.4	15	16.4	V
Voltage range	24V input	22	24	26	V
Voltage range	48V input	43	48	53	V

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Max.	Units
Rated Power	TA=-40°C to 85°C		3	W
Voltage Set Point Accuracy	TPH0505D/S	-5	7.5	%
Voltage Set Point Accuracy	All other types	-5	5	%
Line regulation	High VIN to low VIN (voltage variation +/-5%)		1.2	%
Load Regulation(10% load to rated load)	5V output		10	%
Load Regulation(10% load to rated load)	9V output		10	%
Load Regulation(10% load to rated load)	12V output		10	%
Load Regulation(10% load to rated load)	15V output		10	%

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 second	3000			VDC
Resistance	Viso= 1000V	1			GΩ





ABSOLUTE MAXIMUM RATINGS

Short-circuit protection	1 second
Lead temperature 1.5mm from case for 10 seconds	300℃
Internal power dissipation	300mW
Input voltage Vin, TPH03	5.5V
Input voltage Vin, TPH05	7V
Input voltage Vin, TPH12	15V
Input voltage Vin, TPH15	18V
Input voltage Vin, TPH24	28V
Input voltage Vin, TPH48	54V

TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	Derating if the temperature $\geq 85^{\circ}\text{C}$	-40		105	℃
Storage		-50		130	℃
Case Temperature above	5V output		33		℃
Case Temperature above	12V output		27		℃
Cooling	Free air convection				

All specifications typical at $T_A=25^{\circ}\text{C}$, nominal input voltage and rated output current unless otherwise

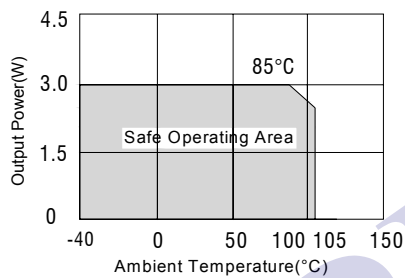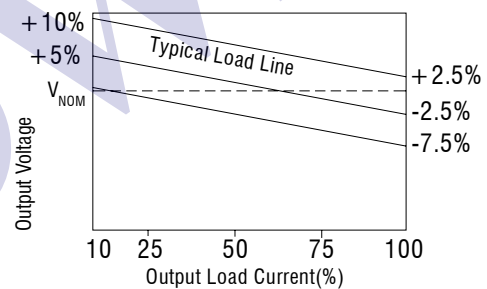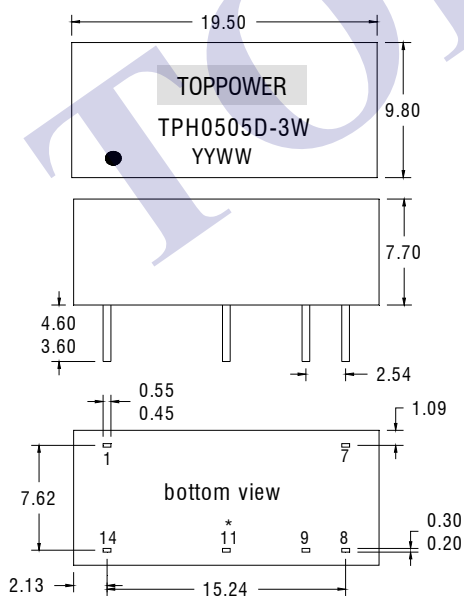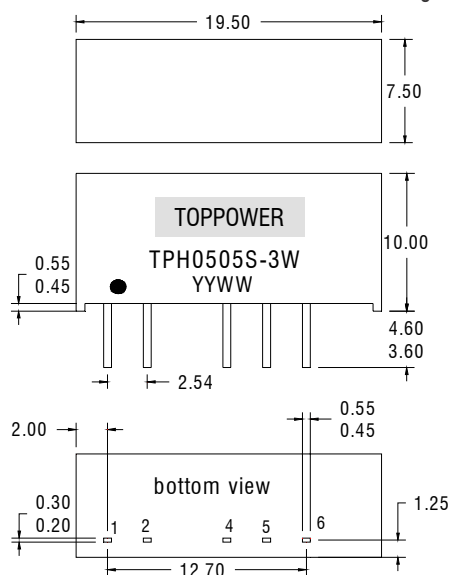TEMPERATURE DERATING GRAPHS

TOLERANCE ENVELOPES

MECHANICAL DIMENSIONS
DIP Package

SIP Package

PIN CONNECTIONS


14 PIN DIP	
Pin	Function
1	-Vin
7	NC
8	OV
9	+Vout
11	-Vout
14	+Vin

7 PIN SIP	
Pin	Function
1	+Vin
2	-Vin
4	-Vout
5	OV
6	+Vout


All dimensions in mm $\pm 0.25\text{mm}$. All pins on a 2.54 mm pitch and within $\pm 0.25\text{mm}$ of true position.
Weight: 2.85g (DIP) 2.76g (SIP) * Pin not fitted on single output variants.

RECOMMENDED FOOTPRINT DETAILS

14Pin DIP Package

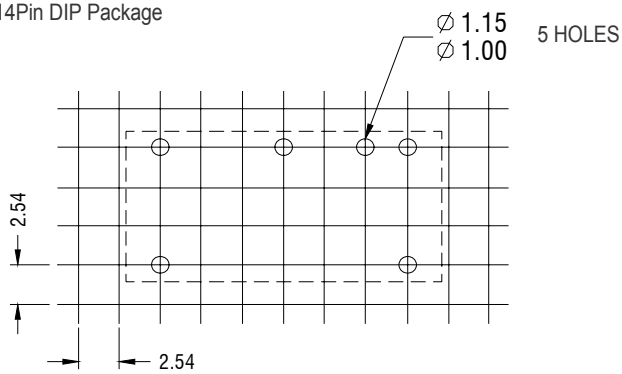


7Pin SIP Package

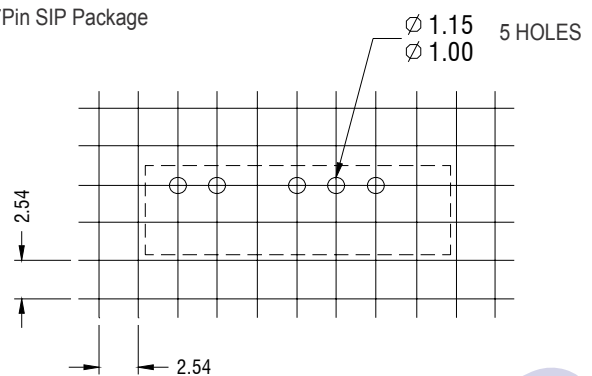


TUBE OUTLINE DIMENSIONS

14Pin DIP Tube

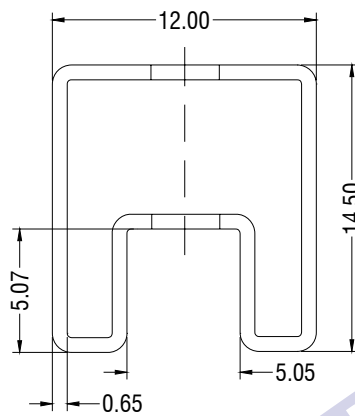

7Pin SIPTube

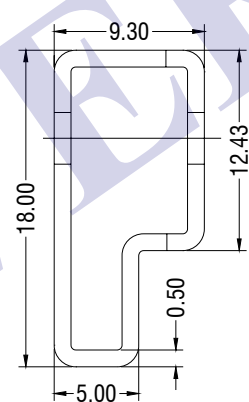

Unless otherwise stated all dimensions in mm ± 0.5 mm.

Tube length (14 Pin DIP) : 520mm ± 2 mm.

Tube length (7 Pin SIP) : 520mm ± 2 mm.

Tube Quantity:25PCS

SOLDERING INFORMATION

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. Both SIP and DIP types in this series are backward compatible with Sn/Pb soldering systems.