
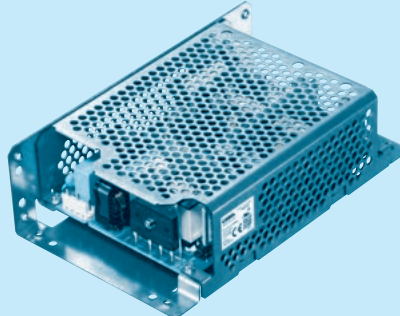


RBC200F

Model name configuration

RB **C** **200** **F** - -

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

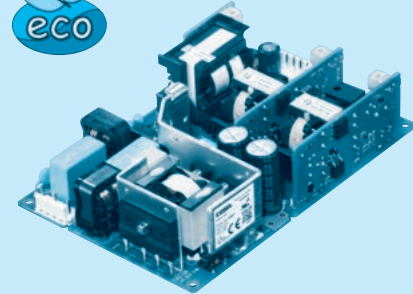

Example recommended EMI/EMC filter
NAC-04-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Multiple output
- ③ Abbreviation power of RB series
200 : 207W
- ④ Universal input
- ⑤ Slot 3 module code
- ⑥ Slot 2 module code
- ⑦ Slot 1 module code
- ⑧ Optional *6
C : with Coating
G : Low leakage current
R : with Remote ON/OFF
S : with Chassis
SN : with Chassis & cover
T : Vertical terminal block
U1 : can attach an external capacitor unit
I3 : with Extended-UART interface

Specification changes when options are added. Please refer to the instruction manual 8.1.

* This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defects to the unit, so handle the unit with care.
The RB series has Order Name which is used for the ordering aside from Model Name.

SPECIFICATIONS

MODEL			RBC200F
INPUT	VOLTAGE [VAC]	*1	AC85 - 264 1 φ
	CURRENT [A]	ACIN 100V	2.4typ
		*2 ACIN 230V	1.1typ
	FREQUENCY [Hz]		50/60 (45 - 66)
	EFFICIENCY [%]	ACIN 100V	89.5typ
		*2 ACIN 230V	91.0typ
	POWER FACTOR	ACIN 100V	0.99typ
		*2 ACIN 230V	0.93typ
	INRUSH CURRENT [A]	ACIN 100V	15typ
		*2 *3 ACIN 230V	30typ
LEAKAGE CURRENT [mA]			0.40 / 0.75max (ACIN 100/240V 60Hz, Io=100%, According to IEC62368-1)
OUTPUT	NUMBER OF SLOT		3
	TOTAL OUTPUT [W]		207
	START-UP TIME [ms]	*2	350typ (ACIN 100V)
	HOLD-UP TIME [ms]	*2	20typ (ACIN 100V)
FUNCTION	REMOTE ON/OFF		Optional R (Refer to Instruction Manual)
ISOLATION	INPUT - OUTPUT, RC	*4 *7	AC3,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)
	INPUT - FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)
	OUTPUT - FG	V3 - FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)
		V1, V2, RC - FG *7	AC 500V 1minute, Cutoff current = 100mA, DC500V 100MΩ min (At Room Temperature)
		V1, V2, RC - V3 *7	AC3,000V 1minute, Cutoff current = 10mA, DC500V 100MΩ min (At Room Temperature)
	OUTPUT - OUTPUT	V1 - V2	AC 500V 1minute, Cutoff current = 100mA, DC500V 100MΩ min (At Room Temperature)
ENVIRONMENT		V1, V2 - RC *7	AC 100V 1minute, Cutoff current = 100mA, DC500V 100MΩ min (At Room Temperature)
	OPERATING TEMP., HUMID. AND ALTITUDE	*1	-20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max
	STORAGE TEMP., HUMID. AND ALTITUDE		-30 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max
	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis
SAFETY AND NOISE REGULATIONS	IMPACT		196.1m/s ² (20G), 11ms, once each X, Y and Z axis
	AGENCY APPROVALS		UL62368-1, C-UL(equivalent to CAN/CSA-C22.2 No.62368-1), EN62368-1, EN62477-1 (OVC III), Complies with EN61558-2-16 (OVC III)
	CONDUCTED NOISE		Complies with FCC-B, VCCI-B, CISPR11-B, CISPR32-B, EN55011-B, EN55032-B
OTHERS	HARMONIC ATTENUATOR	*5	Complies with IEC61000-3-2 (class A)
	SIZE		101 X 38.3 X 152 mm [3.98 X 1.5 X 5.98 inches] (W X H X D), with terminal block 101 X 38.3 X 164 mm [3.98 X 1.5 X 6.46 inches] (W X H X D)
	WEIGHT [g]		450max
	COOLING METHOD	*1	Convection / Forced air (Refer to Instruction Manual 4.1)

- *1 Derating is required.
- *2 The value at 200W output. The value depends on output modules and their combinations.
- *3 More than 3 sec, to re-start.
- *4 Values when V1, V2 and V3 are all shorted.
- *5 Please contact us about another class.
- *6 Specification is changed at option, please contact us for detail.
- *7 This specifications of "ALM, INFO" are the same as RC.
- * To meet the specifications. Do not operate over-loaded condition.
- * Parallel operation is not possible.
- * Sound noise may be generated by power supply in case of pulse load.

Output module specifications

		Slot 1 140W suitable single output			
ITEM	CODE	V	W	Y	Z
Number of slots used		1	1	1	1
VOLTAGE [V]		+12	+15	+24	+48
MINIMUM CURRENT [A]		0	0	0	0
CURRENT [A]		10	8.5	6	3
MAX OUTPUT WATTAGE [W]		120	127.5	144	144
LINE REGULATION [mV] max		48	60	96	192
LOAD REGULATION [mV] max		100	120	150	240
RIPPLE [mVp-p] max	0 to +50°C	120	120	120	380
	*1 -20 to 0°C	240	240	240	480
RIPPLE NOISE [mVp-p] max	0 to +50°C	150	150	150	480
	*1 -20 to 0°C	300	300	300	580
TEMPERATURE	0 to +50°C	120	150	240	480
COEFFICIENT [mV] max	-20 to +50°C	150	180	290	600
DRIFT [mV] max	*4	48	60	96	192
OUTPUT VOLTAGE SETTING [V]		12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	48.00 to 49.92
OUTPUT VOLTAGE ADJUSTMENT RANGE [V]		11.40 to 13.20	14.25 to 16.50	22.80 to 26.40	45.60 to 52.80
OVERCURRENT PROTECTION [A]	*6	Works over 105% of rating and recovers automatically			
OVERVOLTAGE PROTECTION [V]		14.40 to 17.40	18.00 to 21.75	28.80 to 34.80	57.60 to 67.20

		Slot 2, Slot 3 15W suitable single output			Slot 2 15W suitable dual output	
ITEM	CODE	B	C	D	E	F
Number of slots used		1	1	1	1	1
VOLTAGE [V]		+5	+12	+24	±12	±15
MINIMUM CURRENT [A]		0	0	0	0	0
CURRENT [A]		3	1.3	0.65	0.6	0.5
MAX OUTPUT WATTAGE [W]		15	15.6	15.6	14.4	15
LINE REGULATION [mV] max		20	48	96	48	60
LOAD REGULATION [mV] max	*5	40	100	150	600	650
RIPPLE [mVp-p] max	0 to +50°C	80	120	120	120	120
	*1 -20 to 0°C	140	160	160	160	160
RIPPLE NOISE [mVp-p] max	0 to +50°C	120	150	150	150	150
	*1 -20 to 0°C	160	180	180	180	180
TEMPERATURE	0 to +50°C	50	120	240	120	150
COEFFICIENT [mV] max	-20 to +50°C	60	150	290	150	180
DRIFT [mV] max	*4	20	48	96	48	60
OUTPUT VOLTAGE SETTING [V]		5.00 to 5.20	12.00 to 12.48	24.00 to 24.96	12.00 to 12.48	15.00 to 15.60
OUTPUT VOLTAGE ADJUSTMENT RANGE [V]		4.50 to 5.50	10.80 to 13.20	21.60 to 26.40	10.80 to 13.20	13.50 to 16.50
OVERCURRENT PROTECTION [A]	*6	Works over 105% of rating and recovers automatically				
OVERVOLTAGE PROTECTION [V]		5.75 to 8.00	13.80 to 19.20	28.80 to 38.40	13.80 to 19.20	17.25 to 24.00

		Slot 2, Slot 3 30W suitable single output						Slot 2 30W suitable dual output	
ITEM	CODE	G	H	J	K	L	M	P	Q
Number of slots used		1	1	1	1	1	1	1	1
VOLTAGE [V]		+3.3	+5	+12	+16.5	+24	+48	±12	±15
MINIMUM CURRENT [A]		0	0	0	0	0	0	0	0
CURRENT [A]		5	5	2.5	1.9	1.3	0.65	0.7	0.7
MAX OUTPUT WATTAGE [W]		16.5	25	30	31.4	31.2	31.2	16.8	21
LINE REGULATION [mV] max		20	20	48	66	96	192	48	60
LOAD REGULATION [mV] max	*5	40	40	100	120	150	240	600	650
RIPPLE [mVp-p] max	0 to +50°C	80	80	120	120	120	150	120	120
	*1 *2 -20 to 0°C	140	140	160	160	160	250	160	160
RIPPLE NOISE [mVp-p] max	0 to +50°C	120	120	150	150	150	250	150	150
	*1 *3 -20 to 0°C	160	160	180	180	180	350	180	180
TEMPERATURE	0 to +50°C	50	50	120	165	240	480	120	150
COEFFICIENT [mV] max	-20 to +50°C	60	60	150	200	290	600	150	180
DRIFT [mV] max	*4	20	20	48	66	96	192	48	60
OUTPUT VOLTAGE SETTING [V]		3.30 to 3.40	5.00 to 5.20	12.00 to 12.48	16.50 to 17.16	24.00 to 24.96	48.00 to 49.92	12.00 to 12.48	15.00 to 15.60
OUTPUT VOLTAGE ADJUSTMENT RANGE [V]		2.97 to 3.63	4.50 to 5.50	10.80 to 13.20	14.85 to 18.15	21.60 to 26.40	43.20 to 52.80	10.80 to 13.20	13.50 to 16.50
OVERCURRENT PROTECTION [A]	*6	Works over 105% of rating and recovers automatically							
OVERVOLTAGE PROTECTION [V]		4.00 to 5.25	5.75 to 7.00	13.80 to 16.80	18.90 to 23.10	28.80 to 34.80	57.60 to 67.20	14.40 to 18.00	18.00 to 22.50

*1 This is the value that measured on measuring board with capacitor of 22μF at 150mm from output terminal.

Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).

*2 At the G module, ripple is 120 mV(Ta=0 to 50°C) 160 mV(Ta=-20 to 0°C) at 5% or less load because of reduction of standby power.

*3 At the G module, ripple noise is 160mV(Ta=0 to 50°C) 200mV(Ta=-20 to 0°C) at 5% or less load because of reduction of standby power.

*4 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*5 Figures for 0 to rated current. The current not measured side is rated current. (module E, F, P, Q).

*6 The output is shut down when the overcurrent state continues for 5 minutes.

* To meet the specifications. Do not operate over-loaded condition.


* Parallel operation is not possible.

* Sound noise may be generated by power supply in case of pulse load.

Features


- Flexible modular system architecture provides various output configurations
- Multiple outputs of driving system + control system are packaged together, ideal for robot controller
- Meets OVC III (EN62477-1 approved, EN61558-2-16 compliant)
- The output of slot 3 and the other outputs have a reinforced insulation structure
- Remote control function (optional)

Block diagram

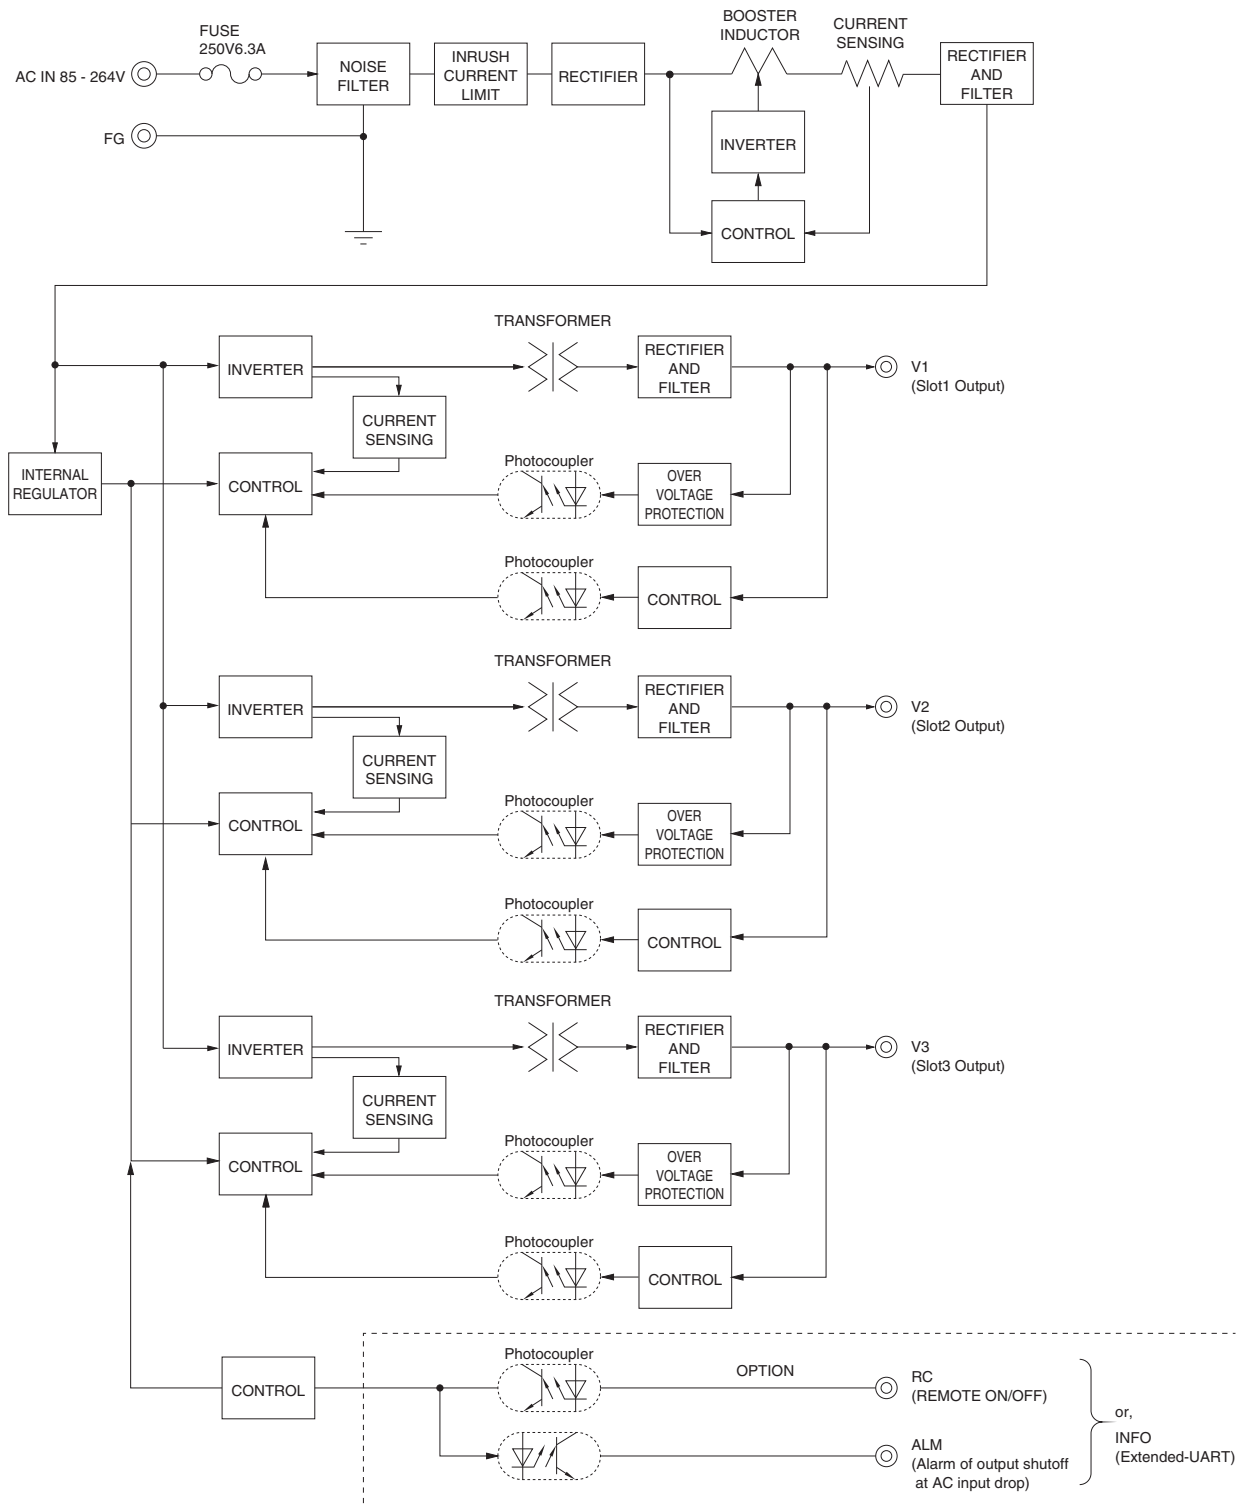


External view

Standard type

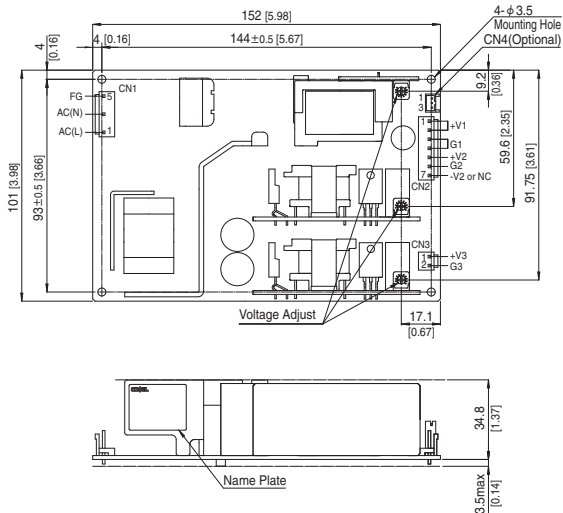

- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 450g max
- ※ There are a total of four attachment holes.
- ※ Dimensions in mm, []=inches
- ※ Mounting torque : $0.6\text{N} \cdot \text{m}$ max
- ※ PCB Material / thickness : FR-4 / 1.7mm [0.07]

Chassis and cover type

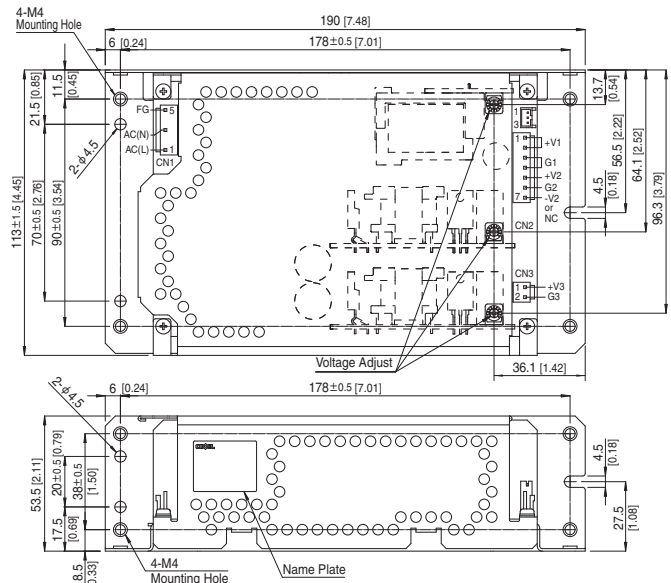

- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 820g max
- ※ There are a total of four attachment holes.
- ※ Dimensions in mm, []=inches
- ※ Mounting torque (Mounting hole of chassis) : $1.5\text{N} \cdot \text{m}$ max
- ※ PCB Material / thickness : FR-4 / 1.7mm [0.07]


I/O Connector	Mating connector	Terminal
CN1	B3P5-VH	VHR-5N
		Chain : SVH-21T-P1.1
		Loose : BVH-21T-P1.1
CN2	B7P-VH	VHR-7N
		Chain : SVH-21T-P1.1
		Loose : BVH-21T-P1.1
CN3	B2P-VH	VHR-2N
		Chain : SVH-21T-P1.1
		Loose : BVH-21T-P1.1
CN4 Optional	BH3B-PH	PHR-3
		Chain : SPH-002T-P0.5S
		Loose : BPH-002T-P0.5S

(Mfr : J.S.T.)

CN1		CN2		CN3		CN4 (Optional)	
Pin No.	Input	Pin No.	Output	Pin No.	Output	Pin No.	Function
1	AC (L)	1	+V1	1	+V3	1	※1
2	-	2	+V1	2	G3	2	
3	AC (N)	3	G1			3	
4	-	4	G1				
5	FG	5	+V2				
		6	G2				
		7	NC or -V2				

- ※1 The function of CN4 varies depending on optional. Please refer to the instruction manual.
- ※ Pin no.2 and 4 is NC at CN1.
- ※ Maximum current per contact at CN2 is 5A.
- ※ Pin no.7 of CN2 is NC when slot 2 module is single output.

Vertical terminal block type



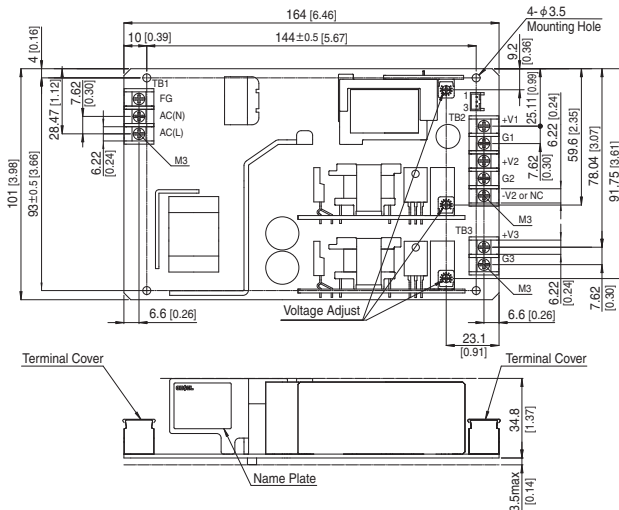


- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 470g max
- ※ There are a total of four attachment holes.
- ※ Dimensions in mm, []=inches
- ※ Screw tightening torque : $0.8\text{N} \cdot \text{m}$ max
- ※ Mounting torque : $0.6\text{N} \cdot \text{m}$ max
- ※ PCB Material / thickness : FR-4 / 1.7mm [0.07]


Assembling and Installation Method

Mounting method


- This power supply is manufactured by SMD technology.
Do not touch any SMD components on the unit. Be especially careful when handling.
- If using a metal chassis, keep proper insulation between the component and metal chassis, use the spacer of 10mm or more between bottom of power supply and metal chassis.
If d_1 and/or d_2 are less than the value mentioned in right figure, insert an insulating sheet with reinforced insulation between the power supply unit and metal chassis.
The following distance is not satisfactory for cooling condition.
Please refer to "Derating" and Instruction Manual 4 for cooling method.
- Installation method shown below is possible.

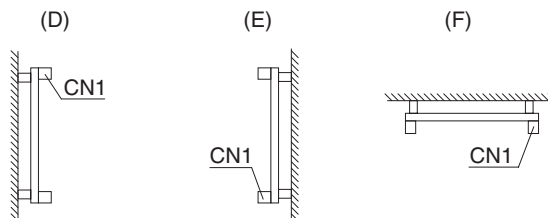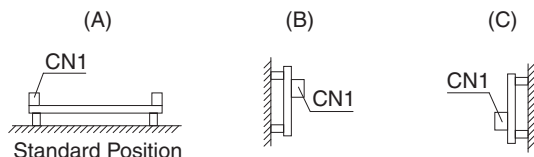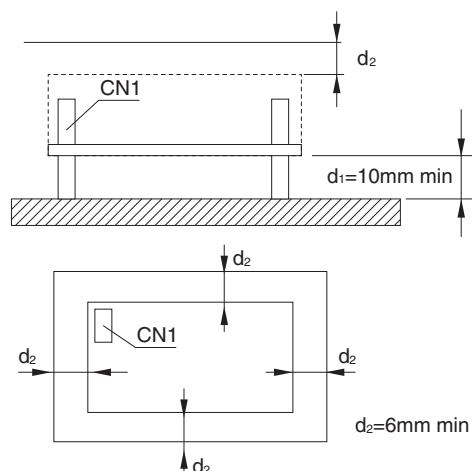

- There is a possibility that it is not possible to cool enough when the power supply is used by the sealing up space as showing in right figure.
Please use it after confirming the temperature of points 1 through 5 of Instruction Manual 4.




- The mounting screw should be M3. The hatched area shows the allowance of metal parts for mounting.

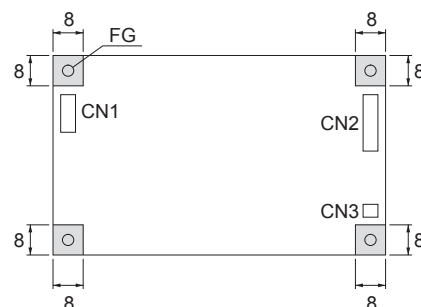


Derating

- Refer to the Instruction Manual 5 for the definition of load factor.

Input Voltage Derating Curve



Derating

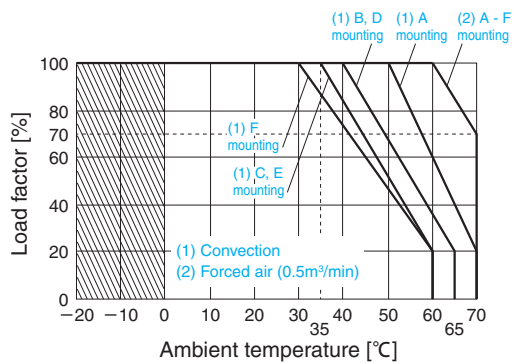● Ambient Temperature Derating Curve
(Reference value)

* Specifications for ripple and ripple noise changes in the shaded area.

■ Please make sure the maximum component temperature rise given in Instruction Manual 4 is not exceeded.

Instruction Manuals

◆ Please see catalog and instructionmanual before you use.

Instruction Manuals <https://en.cosel.co.jp/product/powersupply/RB/>
 Before using our product <https://en.cosel.co.jp/technical/caution/index.html>

RB



NOTICE



Basic Characteristics Data

Model	Circuit method	Switching frequency [kHz]	Input current [A]	Inrush current protection	PCB/Pattern			Series/Parallel operation availability	
					Material	Single sided	Double sided	Series operation	Parallel operation
Input module of RBC200F	Active filter	40 - 220	2.4 *1	Relay	FR-4	-	Yes	No	No
Output module of V, W, Y, Z	LLC resonant converter	90 - 180	-	-	FR-4	-	Yes	No	No
Output module of B, C, D, G, H, J, K, L	Flyback converter	60 - 120	-	-	FR-4	-	Yes	Yes *2	No
Output module of E, F, M, P, Q	Flyback converter	60 - 120	-	-	FR-4	-	Yes	No	No

*1 The value at ACIN 100V and 200W output.

*2 Series operation is possible only if Slot 2 and Slot 3 are the same module. (Refer to Instruction Manual 3.1)



Макро Групп – это:

- дистрибьютор электронных компонентов с 1994 года
- контрактный производитель электроники с 2007 года с собственным производством в Санкт-Петербурге (компания Макро ЕМС, входит в ГК Макро Групп)
- поставщик полупроводниковых материалов
- комплексный поставщик электронных компонентов
- моделирование и производство полупроводниковых эпитаксиальных гетероструктур для задач оптоэлектроники

Головной офис расположен в Санкт-Петербурге. Собственные представительства в крупных промышленных городах России и стран СНГ.

Преимущества для наших заказчиков:

- работа по тендерам с 2012 года
- оформление банковских гарантий
- отсрочки платежей
- поставка электронных компонентов по проектным ценам
- инженерная поддержка проектов заказчиков
- сертификат системы менеджмента качества ISO 9001-2015
- необходимые сертификаты и лицензии

Данный файл получен с сайта www.macrogroup.ru