

2J6552MGF

Cellular, GNSS and Iridium Magnetic Mount

Key Features

Cable 1: Cellular

- 824-960 MHz
- 1710-2170 MHz

Cable 2: GPS/GLONASS/QZSS/Galileo

- 1575-1606 MHz

Cable 3: Iridium

- 1616-1626 MHz

Magnetic Mount

Ground Plane Dependent

Customizable Cable and Connector

Dimensions Ø 135.5 x 30 mm

Certificates: IK09, IP67, IP69K



1. Antenna and electrical specifications

Cable 1

Parameters	Cellular Antenna	
Standards	2G and 3G	
Band (MHz)	850/900	1700/1800/1900/2100
Frequency (MHz)	824-960	1710-2170
Return Loss (dB)	~-8.0	~-16.5
VSWR	~2.4:1	~1.5:1
Efficiency (%)	~39.4	~40.7
Peak Gain (dBi)	~1.6	~2.7
Average Gain (dB)	~-4.2	~-4.0
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	
Connector Type	SMA-Male Standard (Other Connectors Available)	
Cable Length	300 cm Standard (Any Cable Length Available)	
Cable Type	LL100 Standard (Other Cables Available)	

Cable 2

Parameters	GNSS Ceramic Active Antenna	
Standards	GPS/QZSS/Galileo	GLONASS
Band (MHz)	1575	1602
Frequency (Mhz)	1575.42	1598-1606
Patch Size (mm)	25 x 25 x 4	
Passive Gain (dBi)	~3.6	
Impedance (Ohms)	50	
Radiation Pattern	Hemispherical	
Voltage Range (V)	1.5 - 3.6	
Active Gain (dB)	28 @ 2.7V	
Noise Figure (dB)	1.8 @ 2.7V	
Current Consumption (mA)	9 @ 2.7V	
Power Consumption (mW)	24.3 @ 2.7V	
Saw Filter Type	Pre-Filter	
Connector Type	SMA-Male Standard (Other Connectors Available)	
Cable Length	300 cm Standard (Any Cable Length Available)	
Cable Type	LL100 Standard (Other Cables Available)	

Antenna Measurement Conditions:

Mounted on 30 x 30 cm Metal Plate

200 cm of LL100 Cable

Measured in Certified CTIA 3D Anechoic Chamber

Cable 3



Parameters	Iridium Antenna
Standards	Iridium
Band (MHz)	1621
Frequency (MHz)	1616-1627
Patch Size (mm)	36 x 36 x 4
Return Loss (dB)	~-18.8
VSWR	~1.2:1
Efficiency (%)	~76
Peak Gain (dBic)	~4.5
Average Gain (dB)	~-1.1
Impedance	50
Axial Ratio (dB)	3 max
Radiation Pattern	Hemispherical
Polarization	RHCP
Connector Type	SMA-Male Standard (Other Connectors Available)
Cable Length	300 cm Standard (Any Cable Length Available)
Cable Type	LL100 Standard (Other Cables Available)



2. Mechanical and environmental specifications



Specifications	2J6552MGF
Mounting Type	Magnetic Mount
Dimensions (mm)	Ø 135.5 x 30
Radome	ABS
Radome color	Black
Antenna Base	Zamak
Gasket	TPE
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IK09, IP67, IP69K

3. Antenna parameters

Cable 1: Cellular

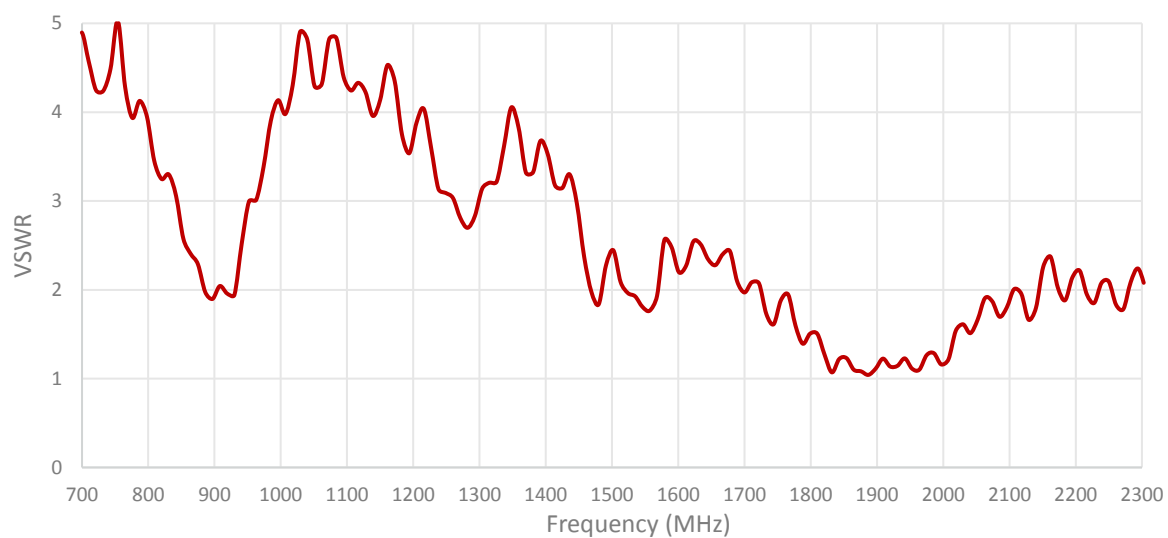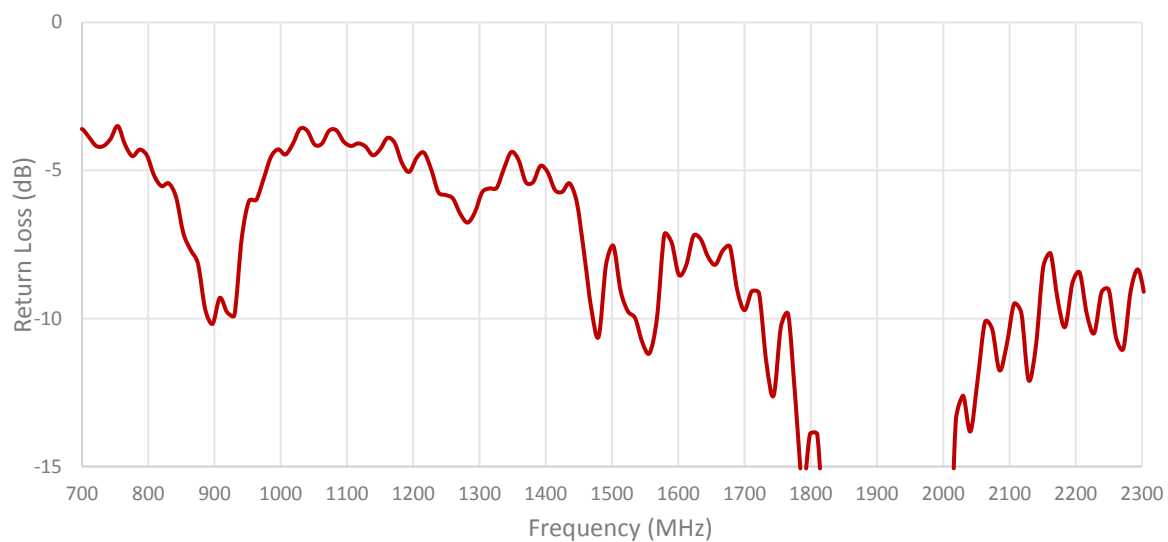


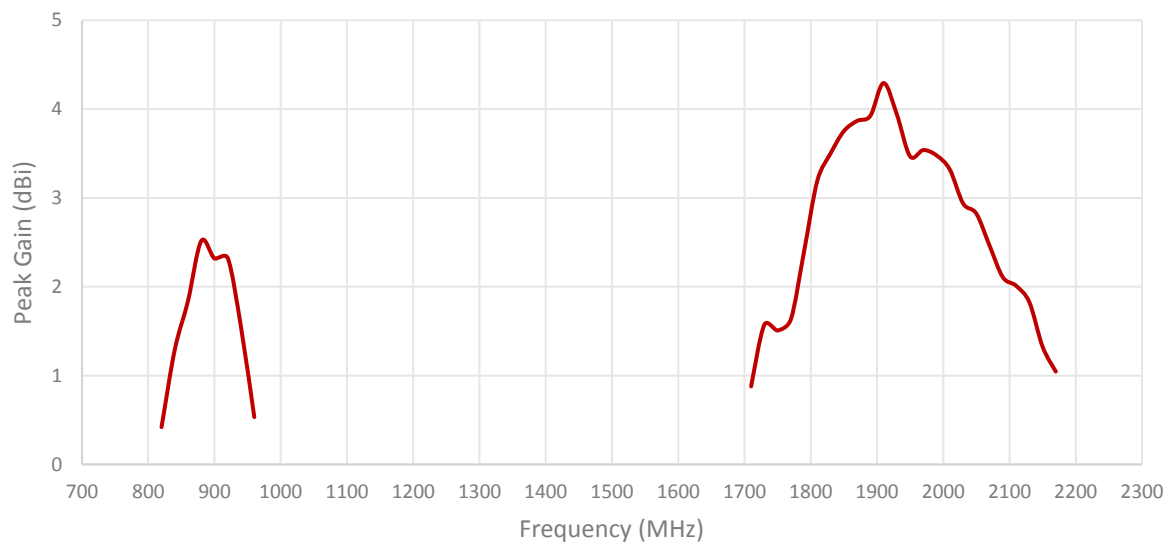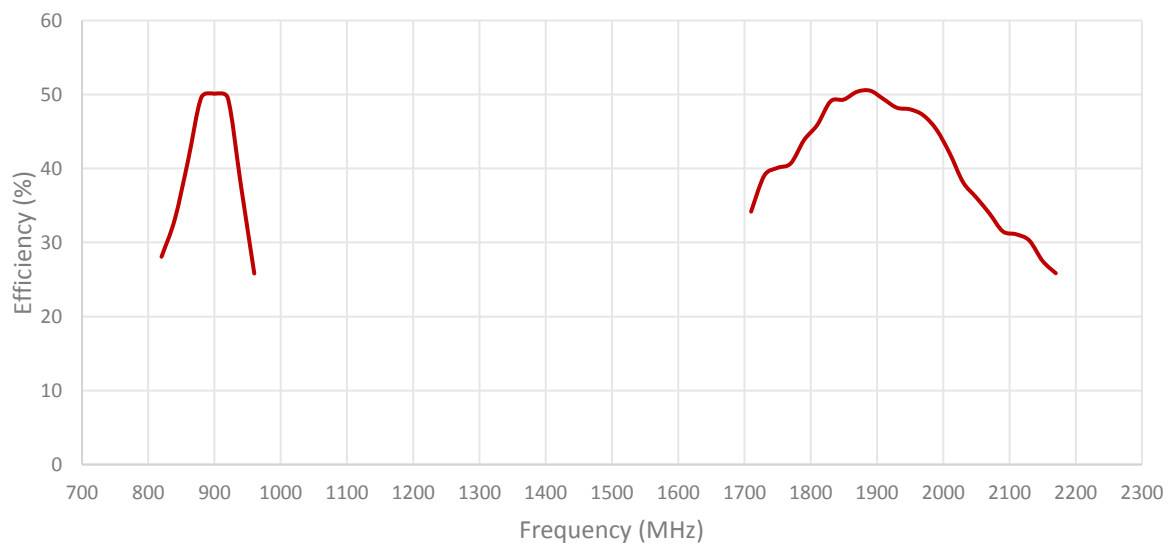

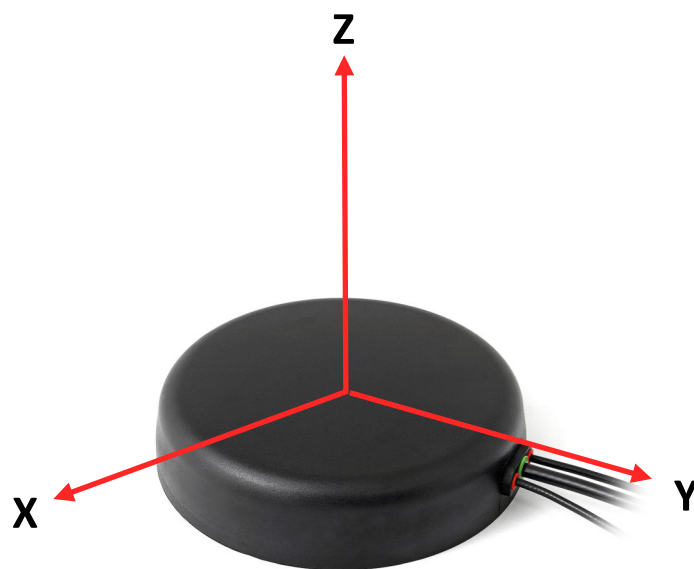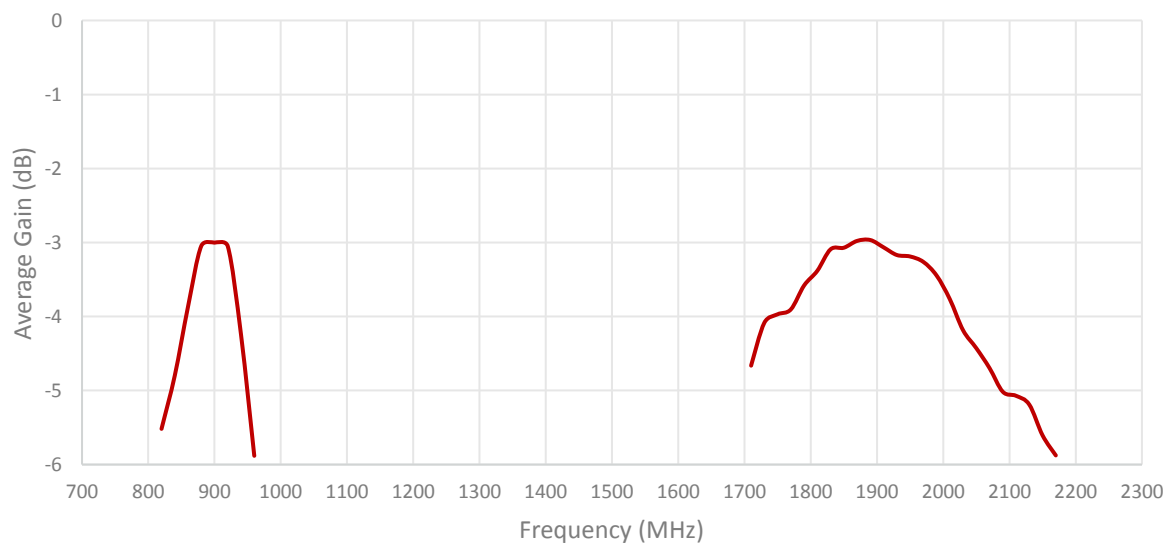


Radiation pattern reference


Cable 1: CELLULAR

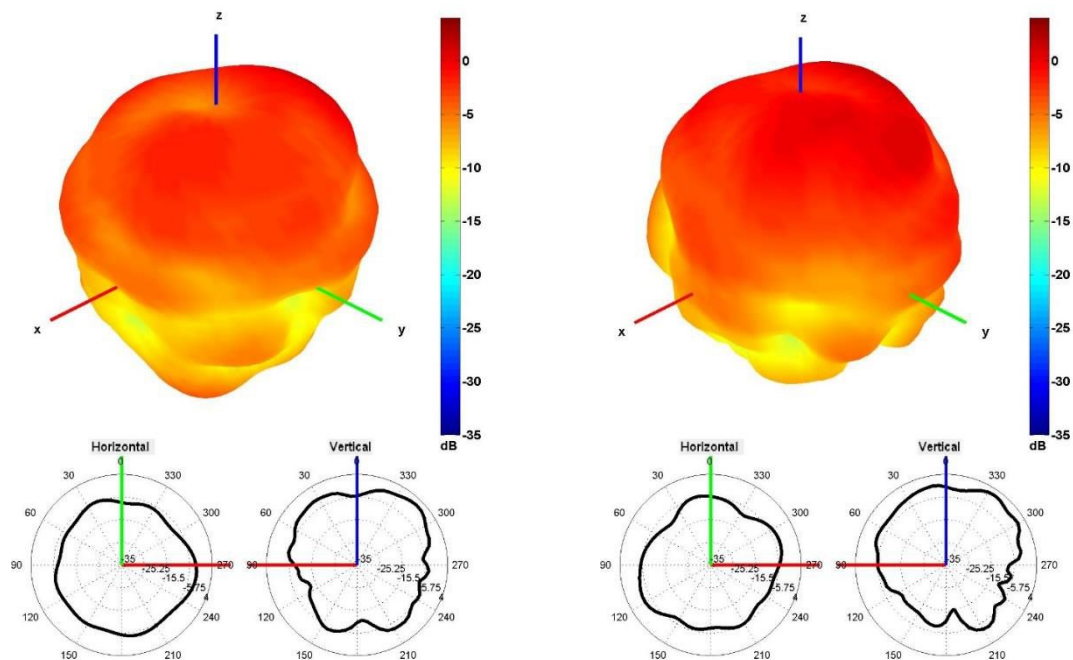

850 and 940 MHz Radiation pattern


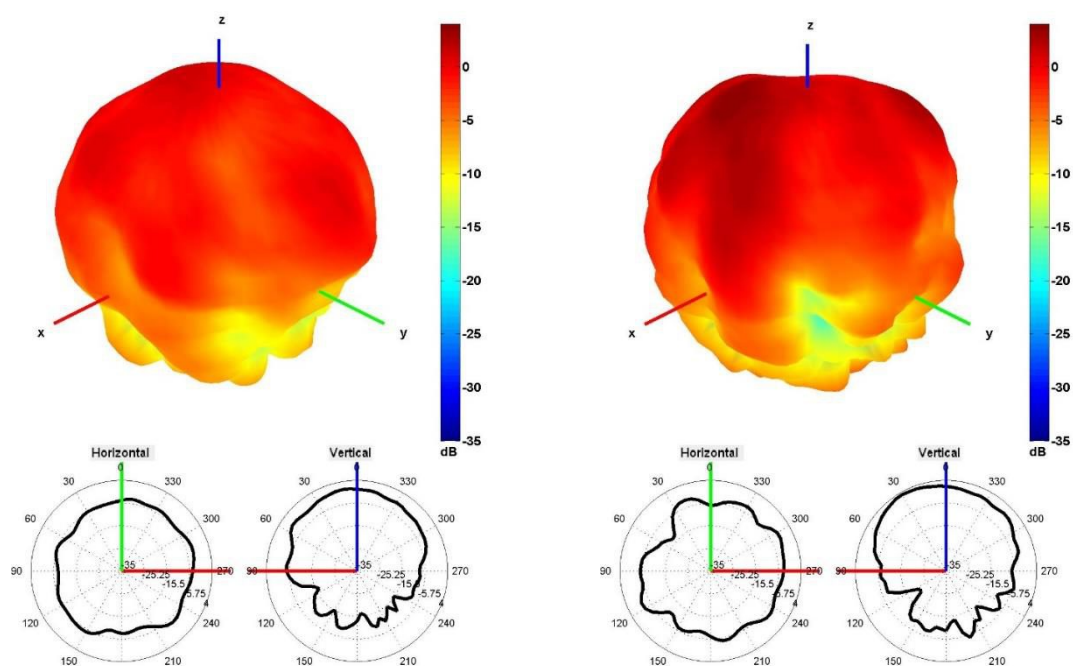


1750 and 1850 MHz Radiation pattern

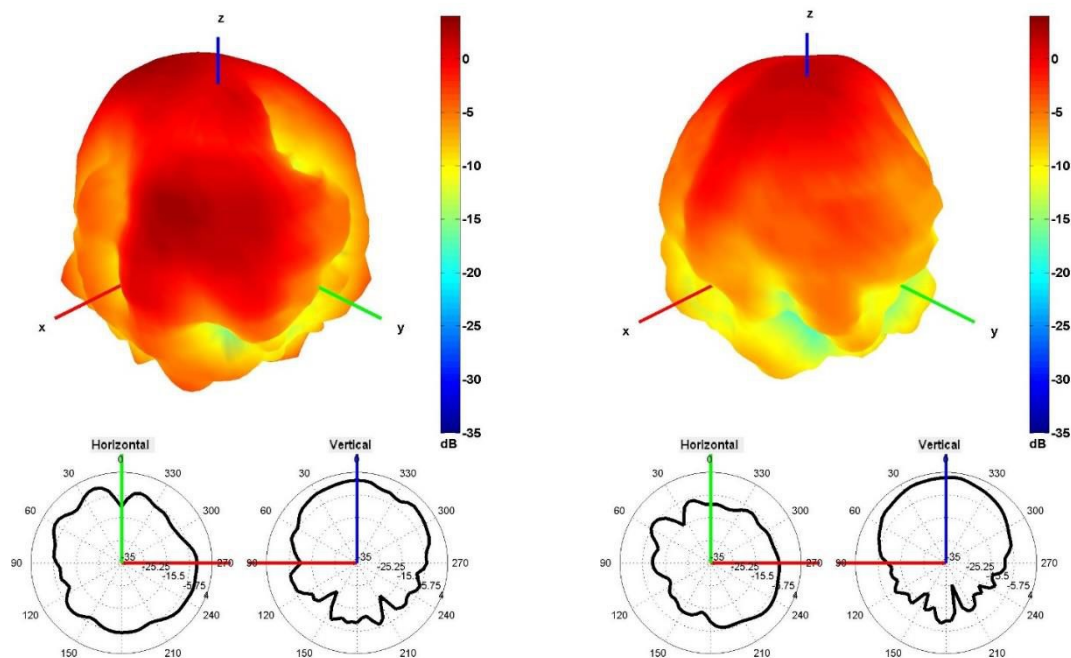

1950 and 2100 MHz Radiation pattern

4. Antenna drawings

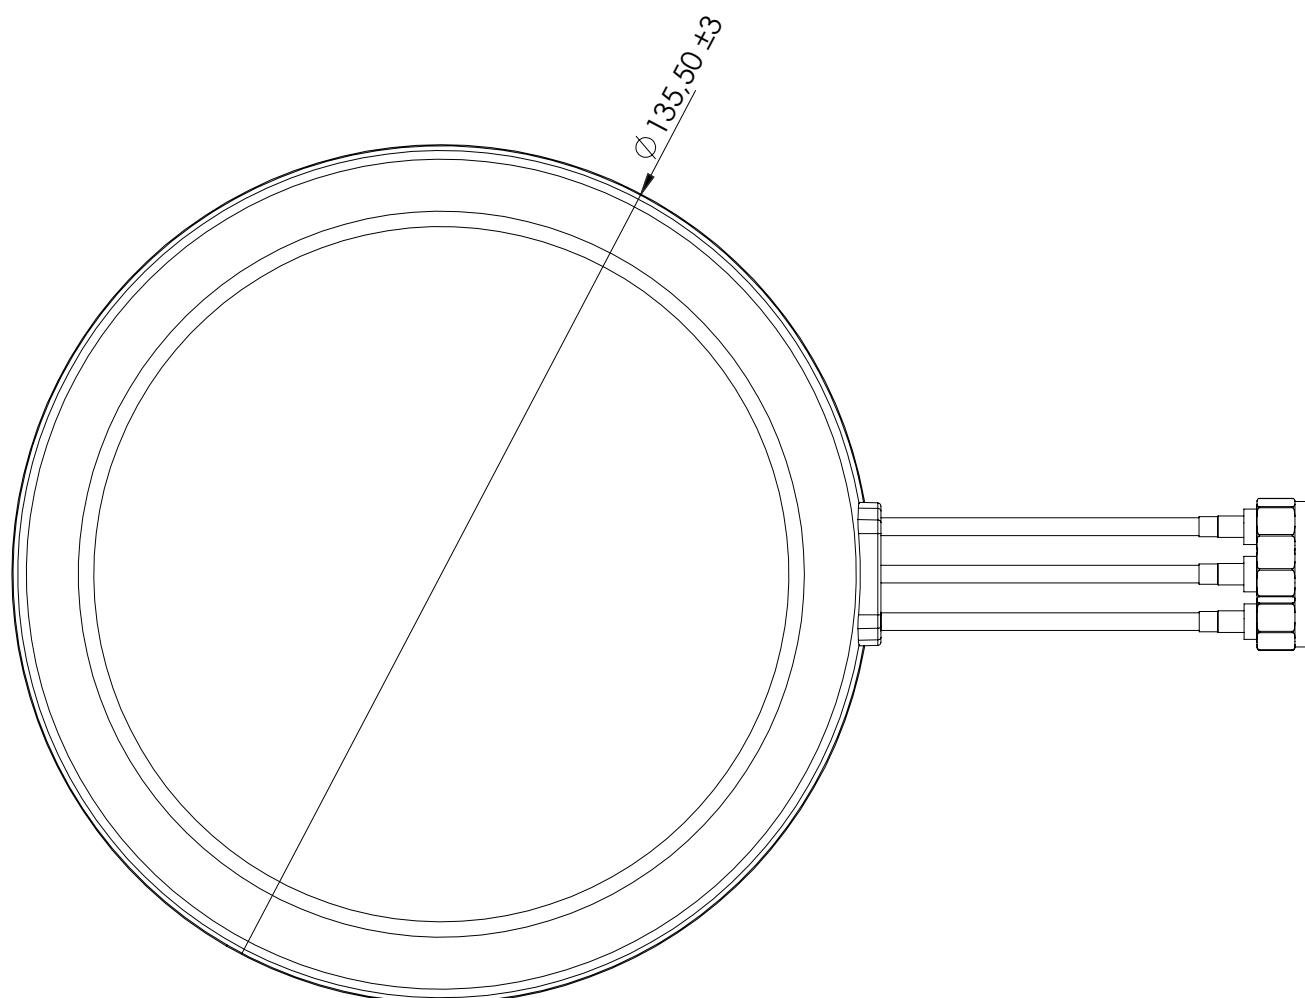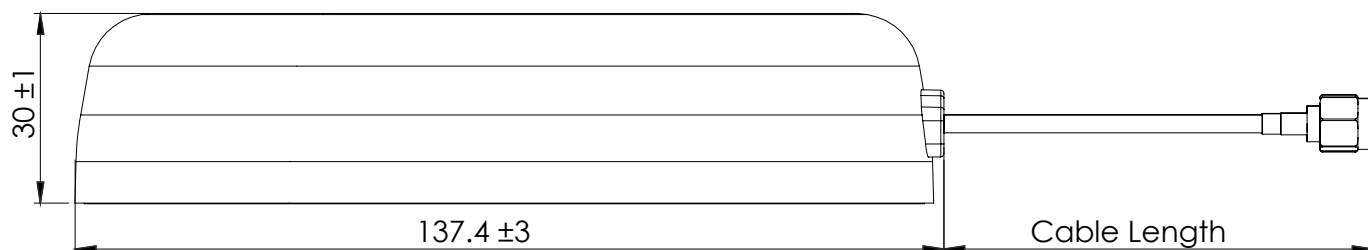

Note: Dimensions are in millimeters

5. Antenna Images



 **iridium**[®]
Certified





Макро Групп – это:

- дистрибьютор электронных компонентов с 1994 года
- контрактный производитель электроники с 2007 года с собственным производством в Санкт-Петербурге (компания Макро ЕМС, входит в ГК Макро Групп)
- поставщик полупроводниковых материалов
- комплексный поставщик электронных компонентов
- моделирование и производство полупроводниковых эпитаксиальных гетероструктур для задач оптоэлектроники

Головной офис расположен в Санкт-Петербурге. Собственные представительства в крупных промышленных городах России и стран СНГ.

Преимущества для наших заказчиков:

- работа по тендерам с 2012 года
- оформление банковских гарантий
- отсрочки платежей
- поставка электронных компонентов по проектным ценам
- инженерная поддержка проектов заказчиков
- сертификат системы менеджмента качества ISO 9001-2015
- необходимые сертификаты и лицензии

Данный файл получен с сайта www.macrogroup.ru