

EVAFLEX® 5-VS

Auto-locking, high temperature option (105°C), high-speed, horizontal mate, 0.5 mm pitch shielded FFC/FPC connector

Product Specifications:

Board Pitch (mm)		0.5
Wiping Length (mm)		1.1
Size (mm)	Height	1.90 +/- 0.10
	Width	Formula: 6.25 + (0.5*?p)
	Depth	4.95 +/- 0.20
Pin counts	Range	10 – 50
	Available	10, 15, 20, 24, 30, 40, 50


* Please inquire for pin counts not listed or outside of the pin count range.

Applicable FPC/FFC:

FPC/FFC Type	Shielded FFC, Non-shielded FFC/FPC
FPC/FFC Contact Point	Top
FPC/FFC Thickness (mm)	0.33 +/- 0.03
Applicable Standards (Reference Only):	
USB 3.1 Gen 1 (5 Gbps) eDP HBR 3 (8.1 Gbps) eDP HBR 2 (5.4 Gbps) eDP (2.7 Gbps) HDMI 2.0 (6 Gbps) V-By-One HS 1.4 (4 Gbps) MiPi standards	



Supports 8+ Gbps high-speed signal

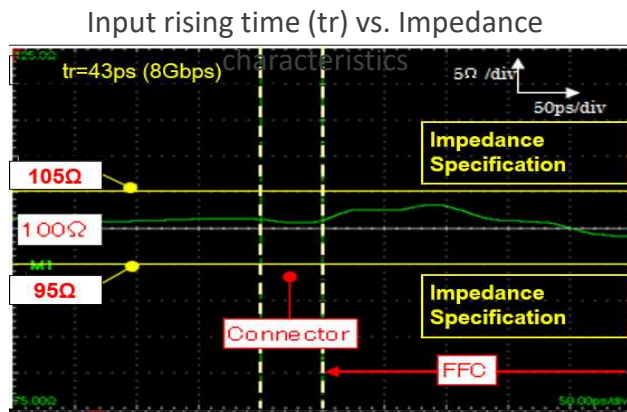


Test condition:
Double-sided shielded FFC
(100 ohm matching)

PCI Express® 3.0 (8 Gbps)

Low height design and foot pattern compatible with CABLINE®-VS/VESA standard notebook PC LCD connector

EVAFLEX® 5-VS can be mounted to the same PCB layout with VESA standard CABLINE-VS receptacle

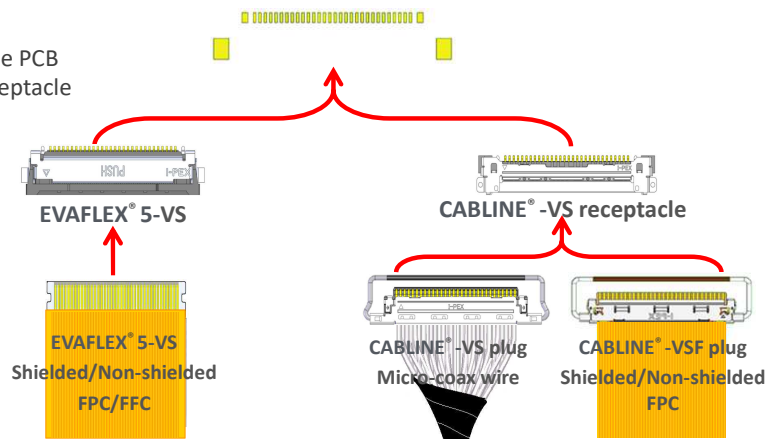

Scalable EVAFLEX® family : Auto-lock connector with many other options available

High-speed and full EMI shield : EVAFLEX® 5-HD

	EVAFLEX® 5-HD
Height (mm)	2.00 +/- 02
Reference Performance	USB4 (20 Gbps)
Special Feature	360-degree fully-shielded with multi-point grounds to prevent EMI leakage



Component Parts Detail

Connector Assembly





Recommended P/N		20535-0**E-02					
PART No.	POS.	A	B	C	D	E	F
20535-010E-02	10P	6.30	4.50	10.17	11.25	2.50	7.10
20535-015E-02	15P	8.80	7.00	12.67	13.75	5.00	9.60
20535-020E-02	20P	11.30	9.50	15.17	16.25	7.50	12.10
20535-024E-02	24P	13.30	11.50	17.17	18.25	7.50	14.10
20535-030E-02	30P	16.30	14.50	20.17	21.25	12.50	17.10
20535-040E-02	40P	21.30	19.50	25.17	26.25	17.50	22.10



Halogen Free



RoHS Compliant

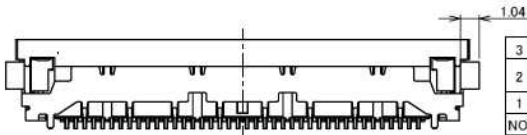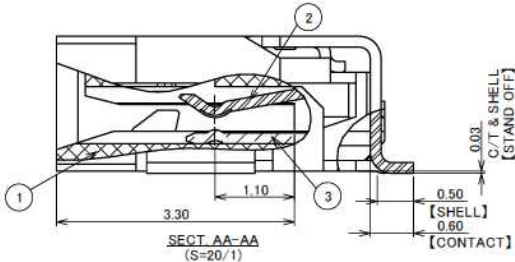
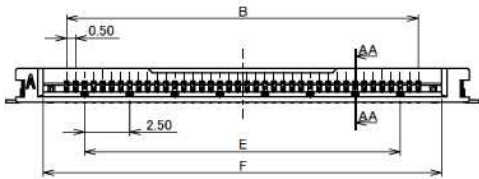
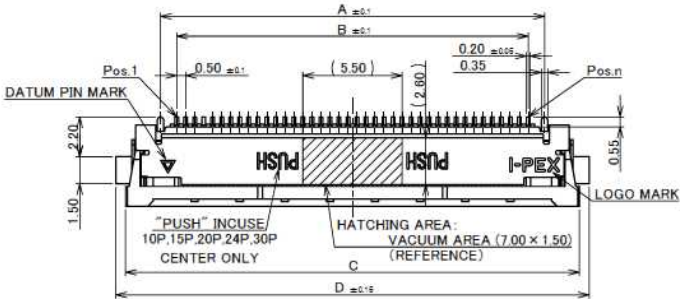


NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
3	SHELL	PHOSPHOR BRONZE	Sn 1.00 μ m MIN. OVER Ni 1.00 μ m MIN. PLATING
2	CONTACT	PHOSPHOR BRONZE	Au OVER Ni PLATING CONTACT AREA: Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN.
1	HOUSING	LCP	UL94V-0. BLACK

Connector Assembly

Recommended P/N		20535-0**E-02		
PART No.	POS.	B	G	H
20535-010E-02	10P	4.50	7.04	5.80
20535-015E-02	15P	7.00	9.54	8.30
20535-020E-02	20P	9.50	12.04	10.80
20535-024E-02	24P	11.50	14.04	12.80
20535-030E-02	30P	14.50	17.04	15.80
20535-040E-02	40P	19.50	22.04	20.80



RECOMMENDED FFC DIMENSION

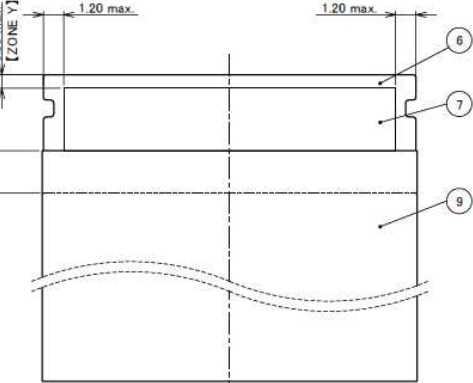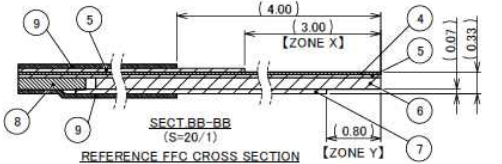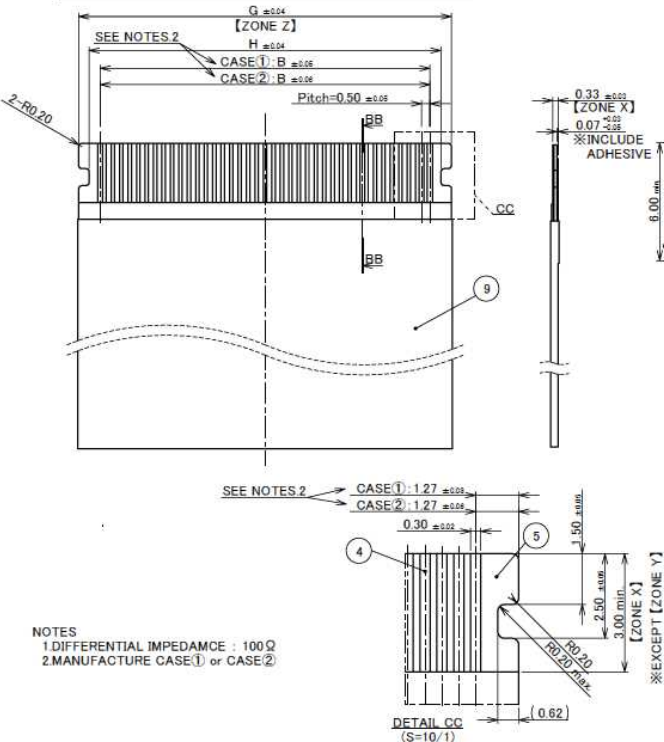


9	SHIELD TAPE	METALIC FILM	-
8	INTERLAYER	ARBITRARY	-
7	GROUND PLATE	METARIC FILM	POLISH or HALF POLISH Sn PLATING
6	REINFORCED TAPE	ARBITRARY	-
5	INSULATION FILM	ARBITRARY	-
4	CONDUCTOR	COPPER ALLOY	CONTACT AREA: Au 0.05 μm MIN. OVER Ni 0.5 μm MIN.
NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS

Rev.12

Recommended P/N		20535-0**E-02		
PART No.	POS.	A	B	J
20535-010E-02	10P	6.30	4.50	9.30
20535-015E-02	15P	8.80	7.00	11.80
20535-020E-02	20P	11.30	9.50	14.30
20535-024E-02	24P	13.30	11.50	16.30
20535-030E-02	30P	16.30	14.50	19.30
20535-040E-02	40P	21.30	19.50	24.30

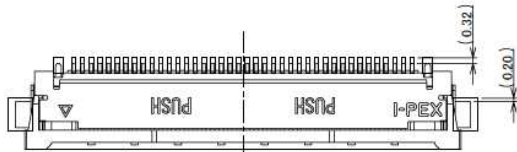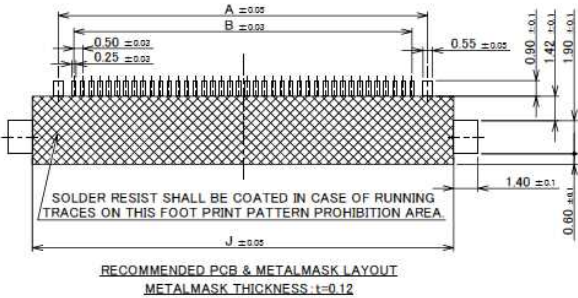

CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN

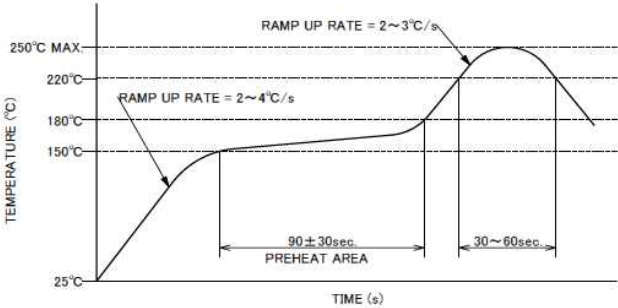

REFLOW TEMPERATURE PROFILE
SENUJI METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)





Rev.12

Connector Assembly

ITEMS	SPECIFICATION
RATING VOLTAGE	200V AC/DC
RATING AMPERAGE (FOR CONTACT)	0.3A AC/DC / Pin IN CASE OF APPLYING 0.5A/Pin, THE TOTAL CURRENT OF THE WHOLE CONNECTOR SHALL BE 15.0A OR LOWER.
OPERATING TEMPERATURE	233~358K(-40°C~+85°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE (FOR SIGNAL CONTACT)	INITIAL : 50mohm MAX. / AFTER TEST : Δ 40mohm MAX.
INSULATION RESISTANCE	INITIAL : 100Mohm MIN. / AFTER TEST : 100Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	30 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	10P : 6.0N MAX. 15P : 9.0N MAX. 20P : 12.0N MAX. 24P : 14.4N MAX. 30P : 18.0N MAX. 40P : 24.0N MAX.
UNMATING FORCE (INITIAL / AFTER TEST)	10P : 1.0N MIN. 15P : 1.5N MIN. 20P : 2.0N MIN. 24P : 2.4N MIN. 30P : 3.0N MIN. 40P : 4.0N MIN.
COPLANARITY	0.10 MAX.
PRODUCT SPECIFICATION	PRS-1670
TEST REPORT	TR-12108
PACKING STANDARD	300-997
INSTRUCTION MANUAL	HIM-12003
APPEARANCE CRITERIA No.	QLS-A***

Rev.12

Recommended P/N		20720-0**E-02					
PART NO.	POS.	A	B	C	D	E	F
20720-010E-02	10P	6.30	4.50	10.17	11.25	2.50	7.10
20720-015E-02	15P	8.80	7.00	12.67	13.75	5.00	9.60
20720-020E-02	20P	11.30	9.50	15.17	16.25	7.50	12.10
20720-024E-02	24P	13.30	11.50	17.17	18.25	7.50	14.10
20720-030E-02	30P	16.30	14.50	20.17	21.25	12.50	17.10
20720-040E-02	40P	21.30	19.50	25.17	26.25	17.50	22.10

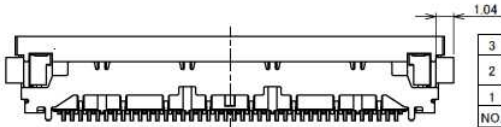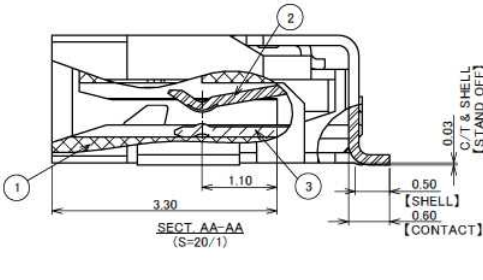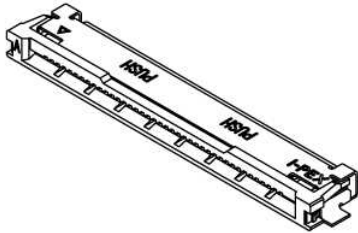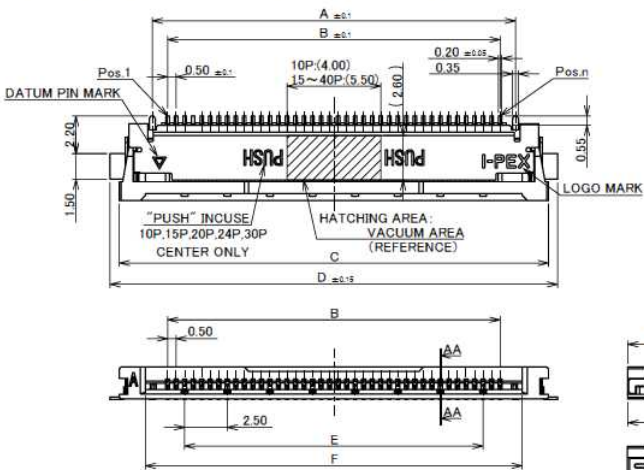




3	SHELL	PHOSPHOR BRONZE	Sn OVER Ni PLATING
2	CONTACT	CORSON ALLOY	Au OVER Ni PLATING CONTACT AREA: Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN.
1	HOUSING	LCP	UL94V-0. BLACK
NO.	DISCRPTION	MATERIAL	FINISH , REMARKS

Rev.5

Connector Assembly

Recommended P/N		20720-0**E-02			
FOR	POS	B	G	H	
20720-010E-02	10P	4.50	7.04	5.80	
20720-015E-02	15P	7.00	9.54	8.30	
20720-020E-02	20P	9.50	12.04	10.80	
20720-024E-02	24P	11.50	14.04	12.80	
20720-030E-02	30P	14.50	17.04	15.80	
20720-040E-02	40P	19.50	22.04	20.80	

RECOMMENDED FFC DIMENSION

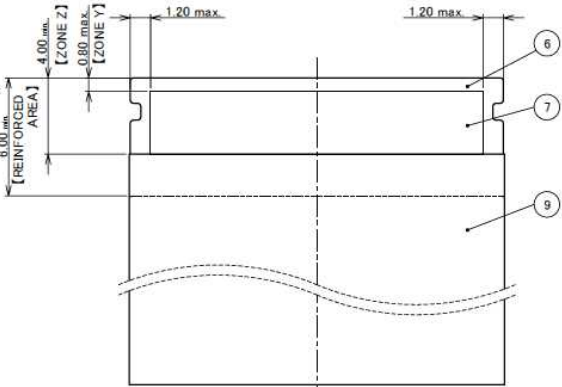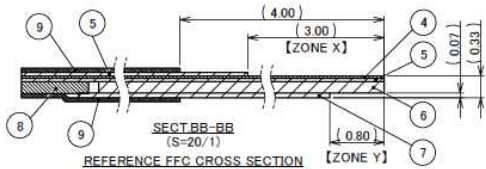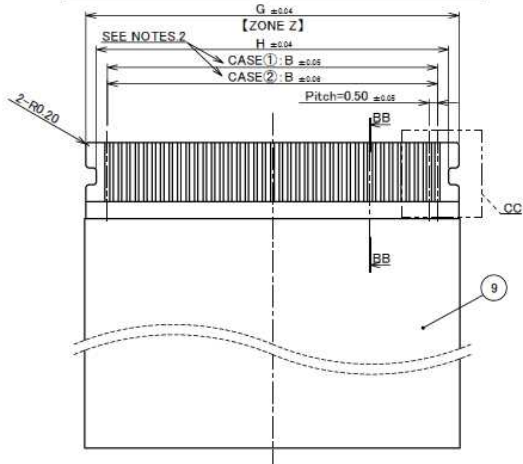


9	SHIELD TAPE	METALIC FILM	-
8	INTERLAYER	ARBITRARY	-
7	GROUND PLATE	METARIC FILM	POLISH or HALF POLISH Sn PLATING
6	REINFORCED TAPE	ARBITRARY	-
5	INSULATION FILM	ARBITRARY	-
4	CONDUCTOR	COPPER ALLOY	CONTACT AREA: Au 0.05 μm MIN. OVER Ni 0.5 μm MIN.
NO	DISCRIPTION	MATERIAL	FINISH , REMARKS



NOTES
1 DIFFERENTIAL IMPEDAMCE : 100 Ω
2 MANUFACTURE CASE① or CASE②

Rev.5

Recommended P/N		20720-0**E-02			
PART NO.	POS.	A	B	J	
20720-010E-02	10P	6.30	4.50	9.30	
20720-015E-02	15P	8.80	7.00	11.80	
20720-020E-02	20P	11.30	9.50	14.30	
20720-024E-02	24P	13.30	11.50	16.30	
20720-030E-02	30P	16.30	14.50	19.30	
20720-040E-02	40P	21.30	19.50	24.30	

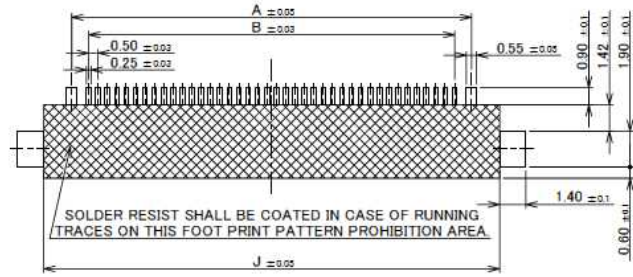

RECOMMENDED PCB & METALMASK LAYOUT
METALMASK THICKNESS t=0.12

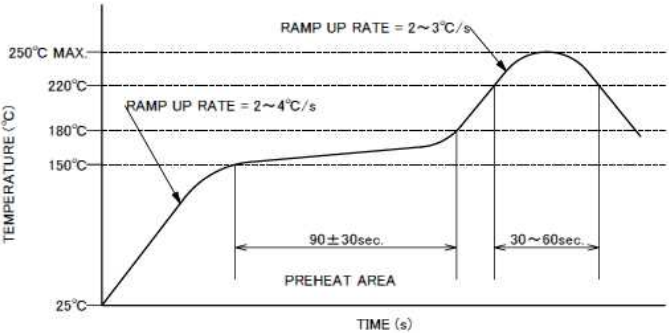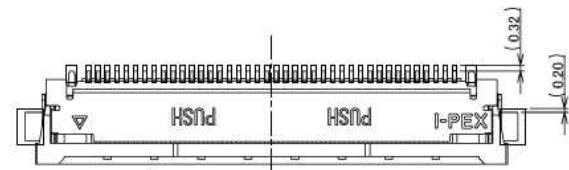

SENJU METAL INDUSTRY CO., LTD. M705-SHF(Sn96.5 Ag3.0 Cu0.5)




Rev.5

Connector Assembly

ITEMS	SPECIFICATION
RATING VOLTAGE	200V AC/DC
RATING AMPERAGE (FOR CONTACT)	0.3A AC/DC / Pin IN CASE OF APPLYING 0.5A/Pin, THE TOTAL CURRENT OF THE WHOLE CONNECTOR SHALL BE 15.0A OR LOWER.
OPERATING TEMPERATURE	233~378K(-40℃~+105℃)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE (FOR SIGNAL CONTACT)	INITIAL : 60mohm MAX. / AFTER TEST : \triangle 40mohm MAX.
INSULATION RESISTANCE	INITIAL : 100Mohm MIN. / AFTER TEST : 100Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	30 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	10P : 6.0N MAX. 15P : 9.0N MAX. 20P : 12.0N MAX. 24P : 14.4N MAX. 30P : 18.0N MAX. 40P : 24.0N MAX.
UNMATING FORCE (INITIAL / AFTER TEST)	10P : 1.0N MIN. 15P : 1.5N MIN. 20P : 2.0N MIN. 24P : 2.4N MIN. 30P : 3.0N MIN. 40P : 4.0N MIN.
COPLANARITY	0.10 MAX.
PRODUCT SPECIFICATION	PRS-2224
TEST REPORT	TR-16039
PACKING STANDARD	300-997
INSTRUCTION MANUAL	HIM-12003
APPEARANCE CRITERIA No.	QLS-A***

Rev.5

Recommended P/N		20893-0**E-02					
PART NO.	POS.	A	B	C	D	E	F
20893-030E-02	30P	16.30	14.50	20.17	21.25	12.50	17.10
20893-040E-02	40P	21.30	19.50	25.17	26.25	17.50	22.10
20893-050E-02	50P	26.30	24.50	30.17	31.25	22.50	27.10

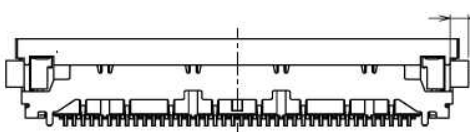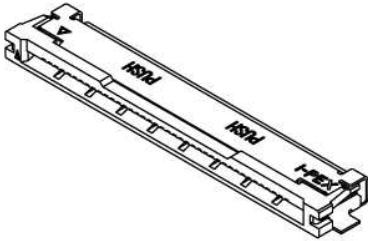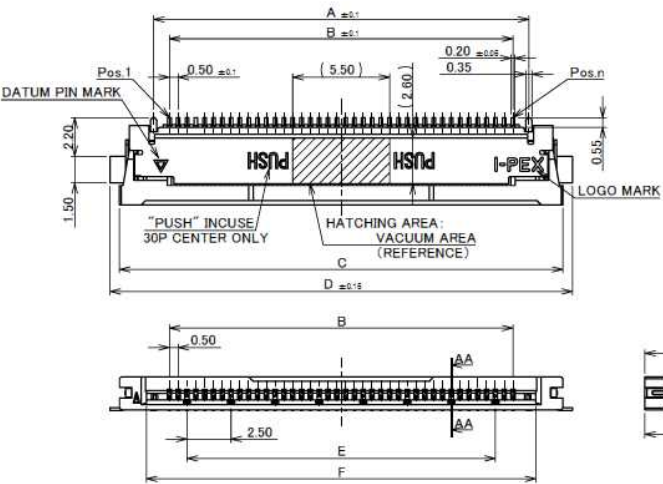






3	SHELL	PHOSPHOR BRONZE	SOLDERING AREA: Sn 3.00 μ m MIN. OVER Ni 1.00 μ m MIN. OTHER AREA: Sn 1.00 μ m MIN. OVER Ni 1.00 μ m MIN.
2	CONTACT	CORSON ALLOY	CONTACT AREA: Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN. SOLDERING AREA: Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN.
1	HOUSING	LCP	UL94V-0, BLACK
NO	DISCRIPTION	MATERIAL	FINISH , REMARKS

Rev.1

Connector Assembly

Recommended P/N		20893-0**E-02			
FOR	POS.	B	G	H	
20893-030E-02	30P	14.50	17.04	15.80	
20893-040E-02	40P	19.50	22.04	20.80	
20893-050E-02	50P	24.50	27.04	25.80	

RECOMMENDED FFC DIMENSION

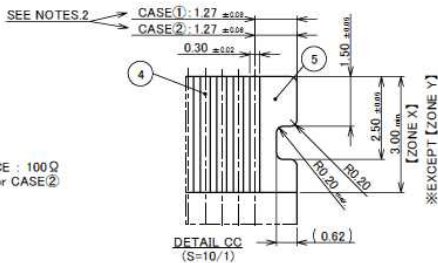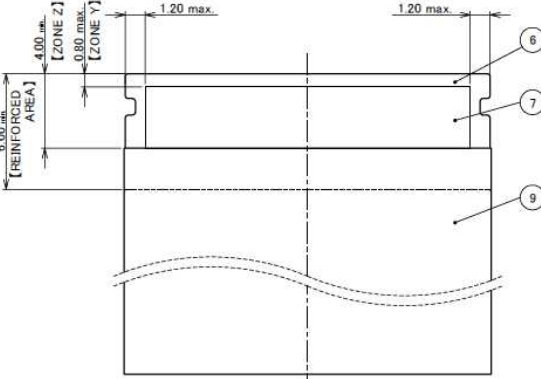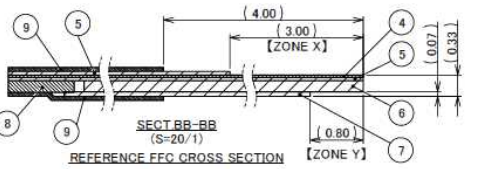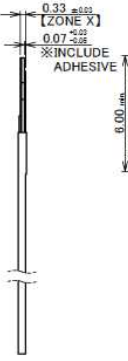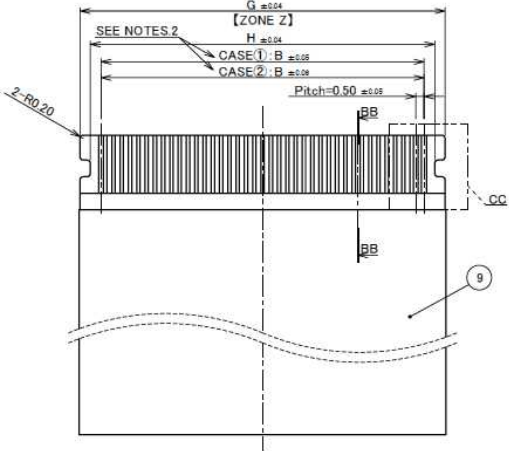


NOTES
1. DIFFERENTIAL IMPEDANCE : 100 Ω
2. MANUFACTURE CASE 1 or CASE 2


9	SHIELD TAPE	METALIC FILM	-
8	INTERLAYER	ARBITRARY	-
7	GROUND PLATE	METARIC FILM	POLISH or HALF POLISH Sn PLATING
6	REINFORCED TAPE	ARBITRARY	-
5	INSULATION FILM	ARBITRARY	-
4	CONDUCTOR	COPPER ALLOY	CONTACT AREA: Au 0.05 μm MIN. OVER Ni 0.5 μm MIN.
NO.	DISCRIPTION	MATERIAL	FINISH, REMARKS

Rev.1


Recommended P/N		20893-0**E-02			
PART NO.	POS.	A	B	J	
20893-030E-02	30P	16.30	14.50	19.30	
20893-040E-02	40P	21.30	19.50	24.30	
20893-050E-02	50P	26.30	24.50	29.30	

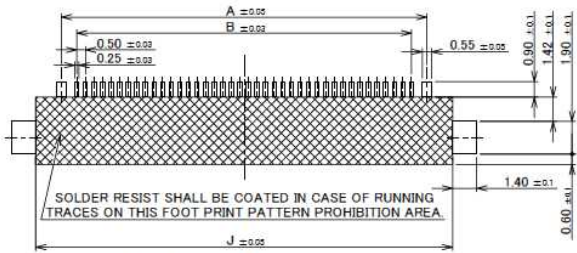

RECOMMENDED PCB & METALMASK LAYOUT
METALMASK THICKNESS ±0.12

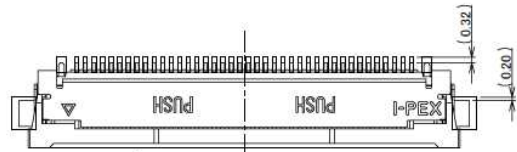

CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN

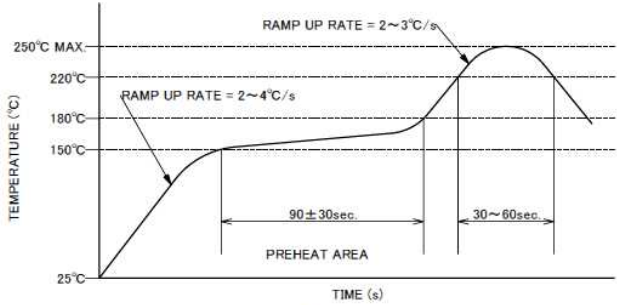

REFLOW TEMPERATURE PROFILE
SENIJU METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)

Rev.1

Connector Assembly

ITEMS	SPECIFICATION
RATING VOLTAGE	200V AC/DC
RATING AMPERAGE (FOR CONTACT)	0.3A AC/DC / Pin IN CASE OF APPLYING 0.5A/Pin, THE TOTAL CURRENT OF THE WHOLE CONNECTOR SHALL BE 15.0A OR LOWER.
OPERATING TEMPERATURE	233~378K(-40°C~+105°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE (FOR SIGNAL CONTACT)	INITIAL : 60mohm MAX. / AFTER TEST : \triangle 140mohm MAX.
INSULATION RESISTANCE	INITIAL : 100Mohm MIN. / AFTER TEST : 100Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	30 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	30P : 18.0N MAX. 40P : 24.0N MAX. 50P : 30.0N MAX.
UNMATING FORCE (INITIAL / AFTER TEST)	30P : 3.0N MIN. 40P : 4.0N MIN. 50P : 5.0N MIN.
COPLANARITY	0.10 MAX.
PRODUCT SPECIFICATION	PRS-2527
TEST REPORT	TR-18083
PACKING STANDARD	300-997
INSTRUCTION MANUAL	HIM-12003
APPEARANCE CRITERIA No.	QLS-A***

Rev.1


Board to
Board



High-Density



Autolocking
FPC/FFC



High-Density



FPC/FFC



Micro-Coaxial
/ Discrete Cable



High-Speed



RF



High-Frequency



Optical
Module



High-Speed



Power



High-Power



I/O
(Input/Output)



Quick charge



Effector



Custom
Connectors
Available

Inquiry



I-PEX, MHF, CABLINE, NOVASTACK, EVAFLEX, MINIFLEX, ISH, IARPB, IASLP, ESTORQ, ISFIT, i-Fit and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative
or more detailed information.

www.i-pex.com



I-PEX

© I-PEX Inc. 2022
All rights reserved.