

TX-3535DR3FC120-OGVCND34-02

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under 700mA
- ◆High luminous output
- ◆No UV

Chip Material:

- ◆Red:AlGaInP

Emitting Color:



- ◆Deep red

Applications:


- ◆Plant lighting
- ◆Medical lighting

Part No.	TX-3535DR3FC120-OGVCND34-02	Spec No.	WKF-BE0733	Page	1 of 8
----------	-----------------------------	----------	------------	------	--------

Package Dimensions:

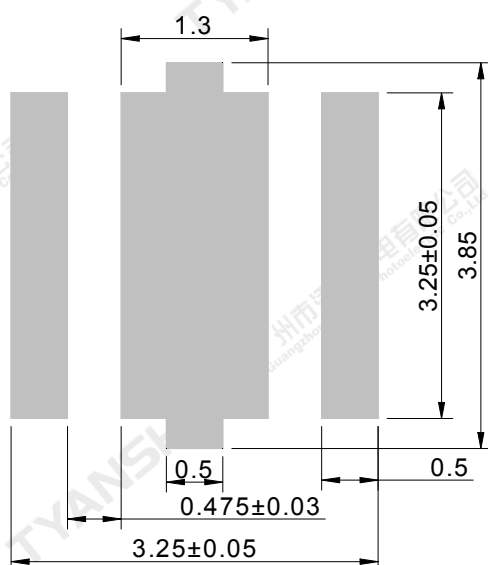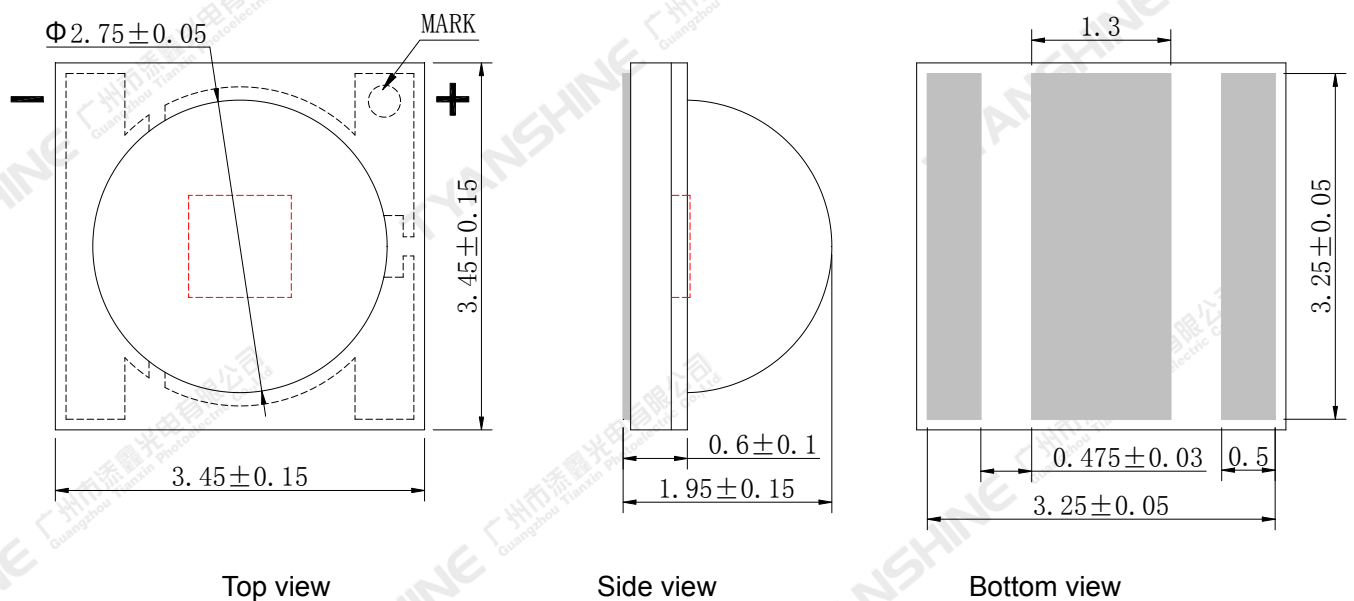

Recommended solder pad

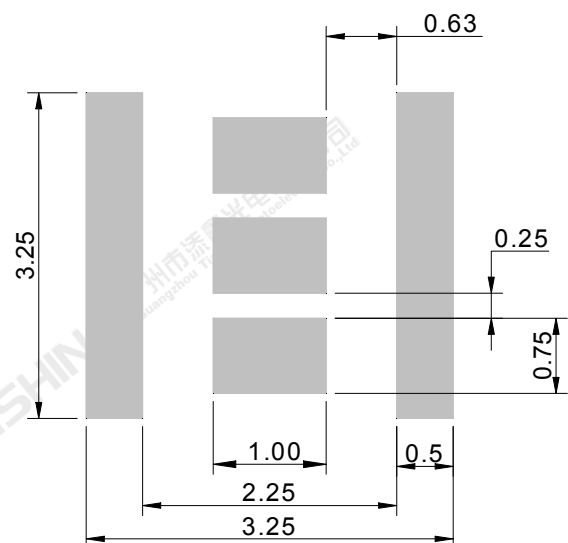

Recommended stencil pattern

Notes:

1. All dimensions are in millimeters .
2. Tolerances unless otherwise mentioned are ± 0.1 mm .

Absolute Maximum Ratings (Tc=25℃)

Parameter	Symbol	Max Ratings	Unit
Forward Current	IF	700	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	1680	mW
Junction Temperature	Tj	115	℃
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	Tstg	-40~70	℃
Operation Temperature	Topr	-30~85	

Notes:

1.Specifications are subject to change without notice.

2.The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.

3.Precautions for ESD:

STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics (Tc=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Radiant Flux	Φ_e	If=350mA	330	390	450	mW
Dominant Wavelength	λ_d		634	642	650	nm
Peak-emission Wavelength	λ_p		647	655	663	nm
Spectral Line Half-Width	$\Delta\lambda$		13	18	23	nm
Forward Voltage	V_f		1.9	2.3	2.6	V
Reverse Current	I_R	$V_R=5V$	—	—	2	μA
Viewing Angle at 50 % IV	$2\theta_{1/2}$	If=350mA	—	120	—	Deg
Thermal Resistance Junction to Case	$R_{\theta_{J-C}}$		—	8	—	K/W
Temperature Coefficient of Voltage	$V\Delta F/T$		—	-2.1	—	mV/°C

Notes:


- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 4.Luminous flux measurement tolerance:±15%.
- 5.Forward voltage measurement tolerance:±0.15V.

Part No.	TX-3535DR3FC120-OGVCND34-02	Spec No.	WKF-BE0733	Page	4 of 8
----------	-----------------------------	----------	------------	------	--------


Typical Electrical/Optical Characteristics Curves



(25°C Ambient Temperature Unless Otherwise Noted)

Forward Current VS. Forward Voltage

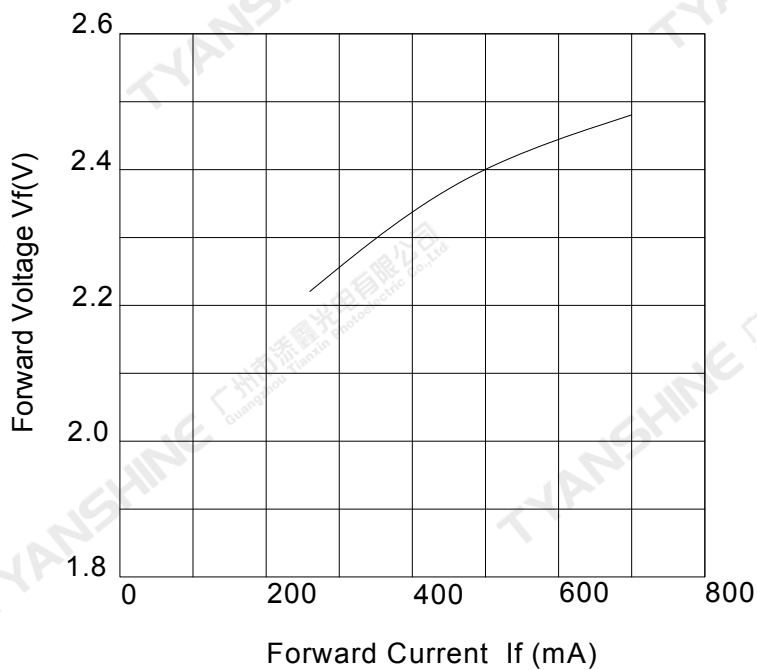

Forward Current VS. Radiant Flux

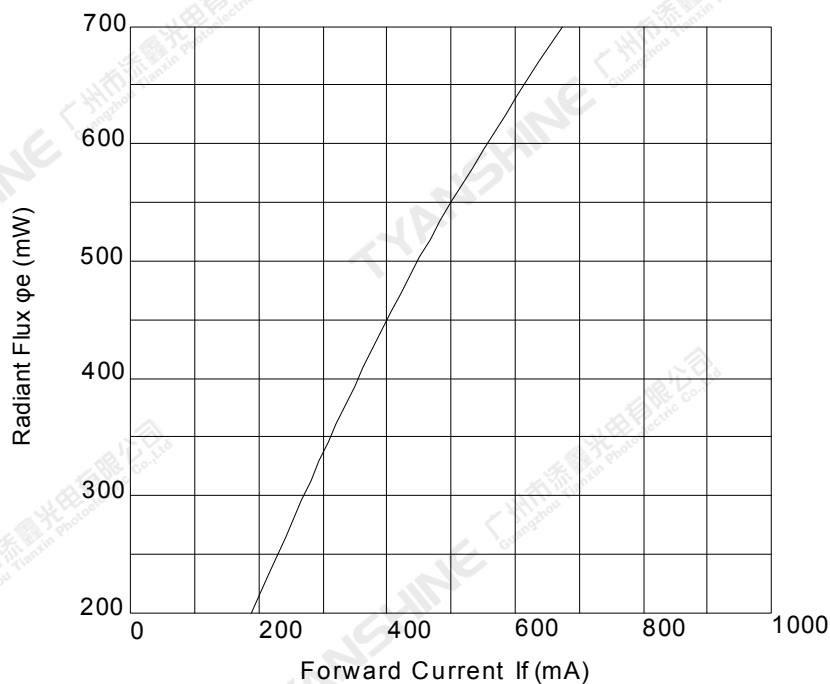

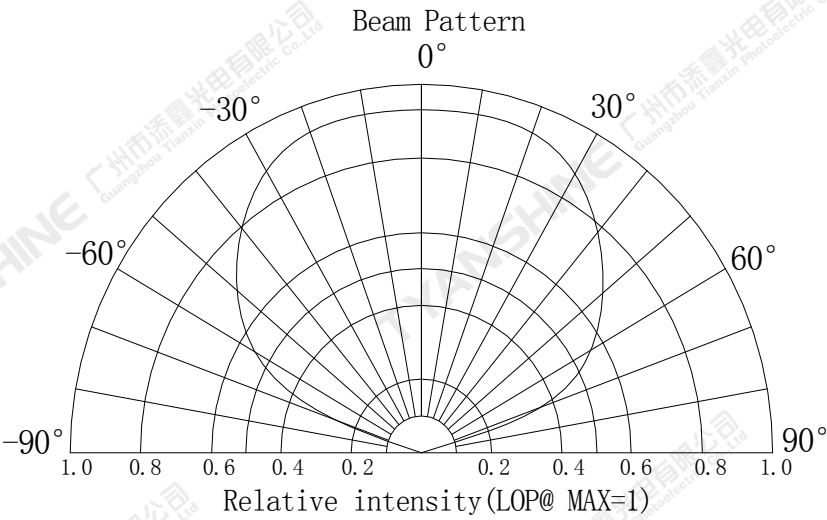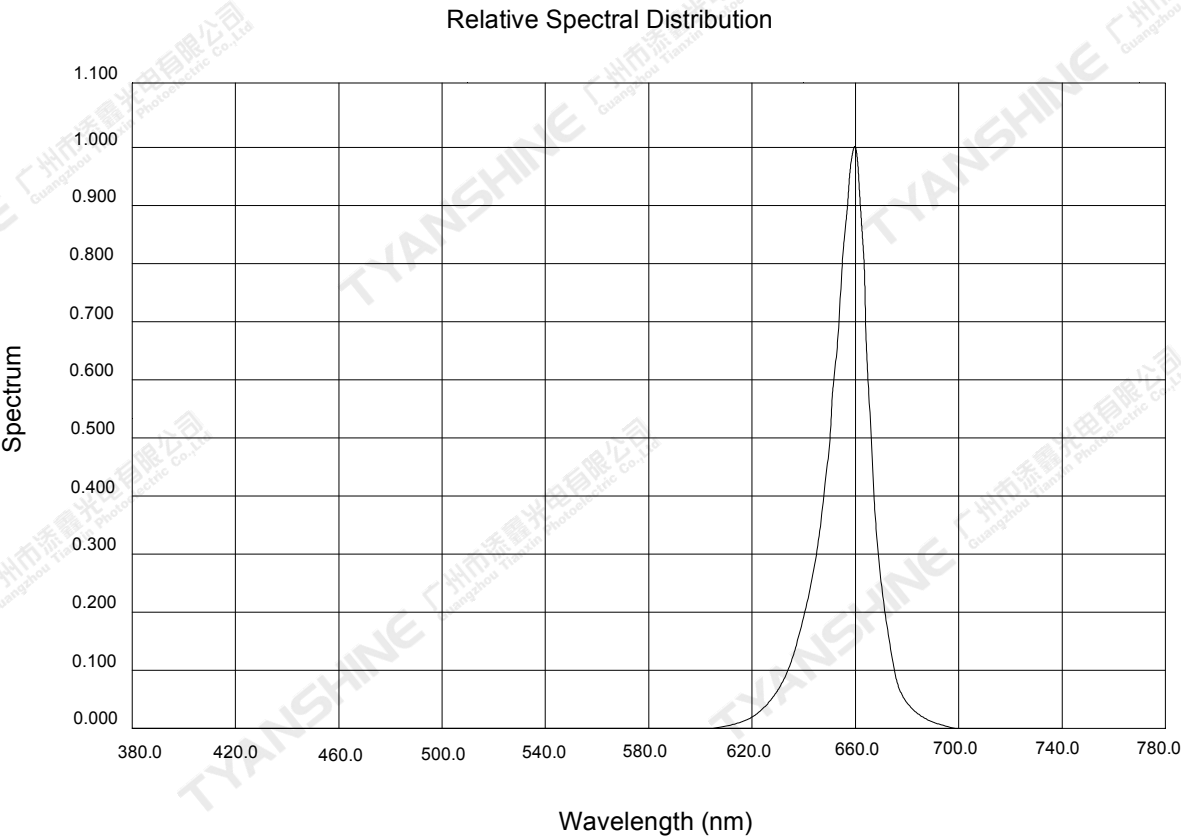

Notes:

- 1. 2θ 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
- 2. View angle tolerance is ± 5°.

Usage Precautions


Storage Environment Condition

Temperature: 5°C ~ 30°C (41°F ~ 86°F)

Humidity: 60% RH Max.

Soldering Condition

Use the conditions shown to the under figure.

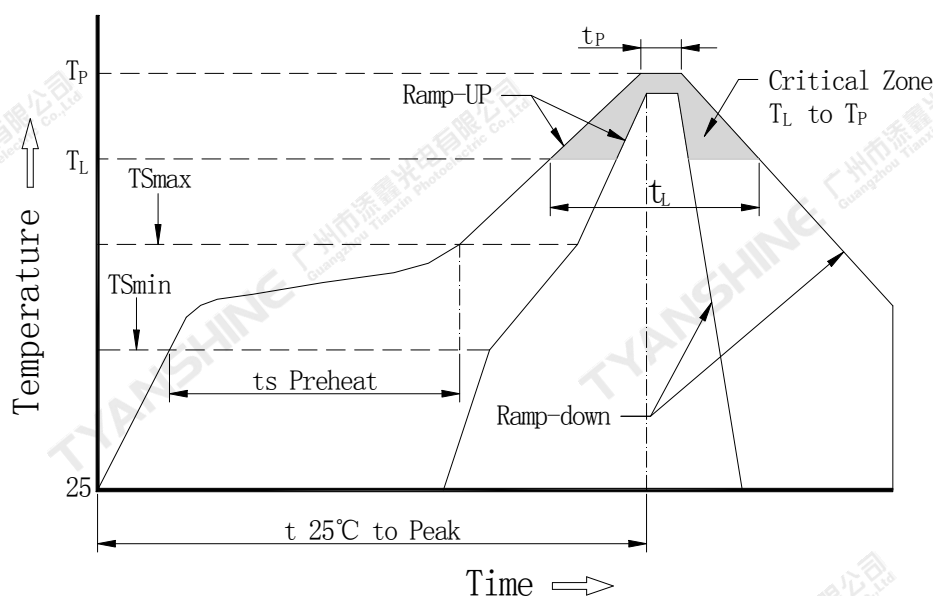



Profile Feature	Lead-Based Solder
Average Ramp-Up Rate (Tsmax to Tp)	3°C/second max.
Preheat: Temperature Min (Tsmin)	100°C
Preheat: Temperature Max (Tsmax)	150°C
Preheat: Time (Tsmin to Tsmax)	60-120 seconds
Time Maintained Above: Temperature (Tl)	183°C
Time Maintained Above: Time (Tl)	60-150 seconds
Peak/Classification Temperature (Tp)	225°C
Time Within 5°C of Actual Peak Temperature (Tp)	10-30 seconds
Ramp-Down Rate	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.

Note:

All temperatures refer to topside of the package, measured on the package body surface.

Dimensions For Cannulation And Packaging

Quantity: 1000PCS

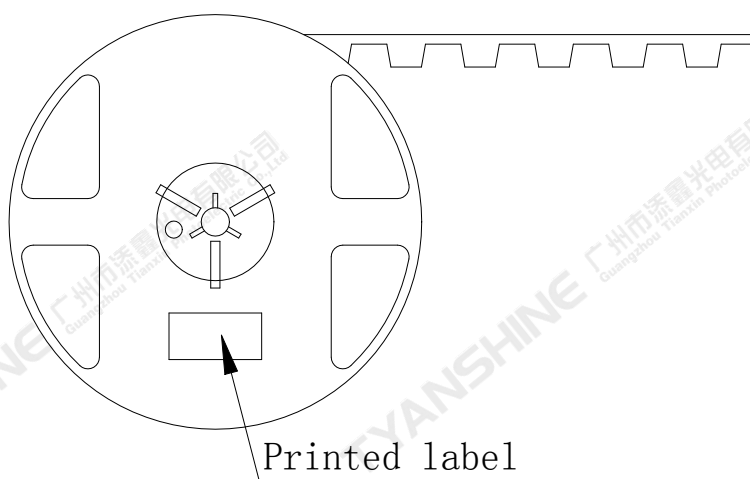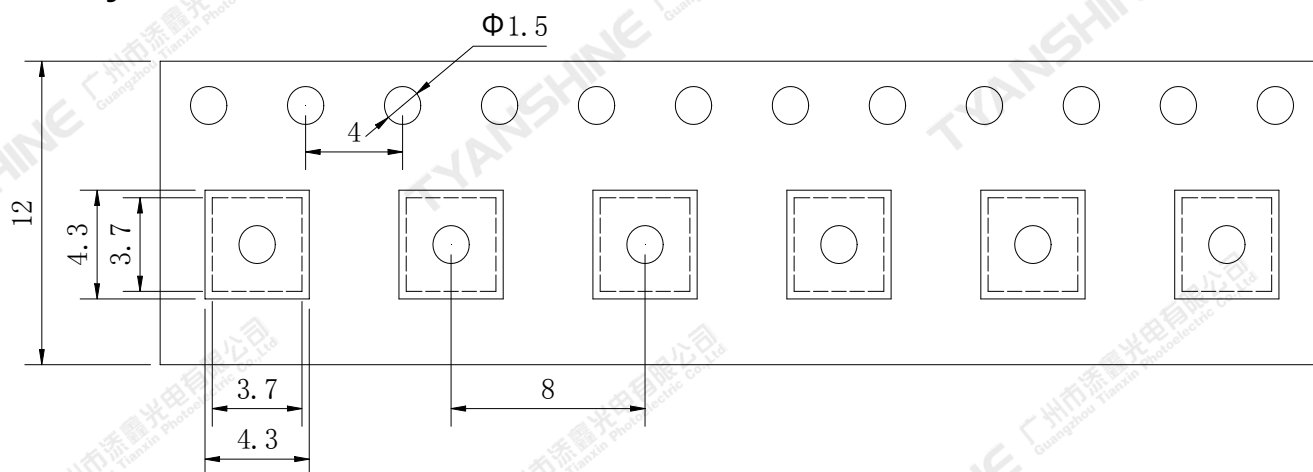**Notes:**

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

Part No.	TX-3535DR3FC120-OGVCND34-02	Spec No.	WKF-BE0733	Page	8 of 8
----------	-----------------------------	----------	------------	------	--------