

Shenzhen Leadtek Electronics Co.,Ltd

PRODUCT SPECIFICATION

TFT-LCD MODULE

Module No: LTK035VGCLM40-V0

☒ Preliminary Specification

☐ Approval Specification

Designed by	Checked by	Approved by
<i>jona</i>	<i>Jerry</i>	<i>lan</i>

Final Approval by Customer

Approved by	Comment

※The specification of "TBD" should refer to the measured value of sample . If there is difference between the design specification and measured value, we naturally shall negotiate and agree to solution with customer.



1.0 Document Revision History

Version	Contents	Date	Note
V0	Original	2023.10.06	





1.1 General Specifications

No.	Item	Specification	Unit	Remar
1	LCD Size	TFT" 3.5	inch	-
2	Panel Type	a-Si IPS	-	-
3	Display Resolution	640xRGBx480	Pixel	-
4	Display Mode	Normally Black	-	-
5	Number of Colors	16.7M	-	-
6	Viewing Direction	ALL	-	Note
7	Contrast Ratio	800	-	Note
8	Luminance	400	cd/m2	Min
9	LCM outline dimension	74.50 (H) X62.40 (V) x2.29 (D)	mm	Note
10	Active Area	70.08(H)x52.56V)	mm	Note
11	Pixel Pitch	0.073(H)x0.219(V)	mm	-
12	Weight	TBD	g	-
13	Driver IC	NV3052	bit	-
14	Light Source	12 white LED	-	-
15	Interface	RGB Mode	-	-
16	Operating Temperature	-20~+70	°C	-
17	Storage Temperature	-30~+80	°C	-

Note 1: Please refer to the mechanical drawing ;



2.Pin Assignments

Pin No.	Symbol	Function
1-2	LEDK	Backlight cathode
3-4	LEDA	Backlight anode
5-7	NC	Not connect
8	RESET	Hardware Reset
9	SPENA	No connector(Serial interface chip enable.CS)
10	SPCLK	No connector(Serial interface clock input.SCL)
11	SPDAT	No connector(Serial interface data input/output.SDA)
12-19	B0-B7	8-bit blue data bus
20-27	G0-G7	8-bit green data bus
28-35	R0-R7	8-bit red data bus
36	HSYNC	Horizontal sync signal
37	VSYNC	Vertical sync signal
38	DOTCLK	Pixel clock input pin
39-40	NC	Not connect
41	VCCIO	Power supply for I/O Pins
42	VCC	Power supply for analog circuit
43	NC	Not connect
44-45	NC	Not connect
46	NC	Not connect
47	NC	Not connect
48	NC	Not connect
49	NC	Not connect
50	NC	Not connect
51	NC	Not connect
52	DEN	Data input enable
53	DGND	Ground
54	DGND	Ground

3. Electrical Specification

3.1 Absolute Maximum Ratings

Item	Symbol	Value	Unit	Remark
Analog Power Supply Voltage	VCI	-0.3~+4.8	V	-
I/O Power Supply Voltage	IOVCC	-0.3~4.5	V	-

3.2 Typical Operation Conditions

Item	Symbol	Min.	Typ.	Max.	Unit
Analog Supply Voltage	VCI	3.0	3.3	3.6	V
I/O Supply Voltage	IOVCC	1.65	1.8/2.8	3.3	V
Input High Voltage	V _{IH}	0.8*IOVCC	-	IOVCC	V
Input Low Voltage	V _{IL}	0	-	0.2*IOVCC	V
Output High Voltage	V _{OH}	0.8*IOVCC	-	-	V
Output Low Voltage	V _{OL}	-	-	0.2*IOVCC	V

3.3 Backlight Circuit Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
LED Electric current	I_B	-	40	-	mA
LED Voltage	V_f	-	19.2	-	V
Power consumption	P_{BL}	-	768	-	mW

3.4 LCD Current Consumption

Item	Symbol	Typ.	Max.	Unit
Full Mode	VCC	-	-	mA
VCI=3.3V , IOVCC=3.3V ; TN Type=>All Black Pattern. IPS Type=>All White Pattern. Temperature : 25°C				
Sleep Mode	VCC	-	-	uA
VCI=3.3V , IOVCC=3.3V ; DC/DC converter is enabled. Internal oscillator is started and panel scanning is started.				


4.Optical Specification

4.1 LCM Optical Characteristics

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Viewing Angle Range	Left	θ_L	$CR \geq 10$	-	85	-	degree
	Right	θ_R		-	85	-	
	Top	θ_T		-	85	-	
	Bottom	θ_B		-	85	-	
Response Time		Ton+Toff	$\theta = \Phi = 0^\circ$	-	25	50	ms
Contrast Ratio		CR	$\theta = \Phi = 0^\circ$	-	800	-	-
Luminance		L	$\theta = \Phi = 0^\circ$	-	400	-	cd/m ²
Color Chromaticity (CIE1931) 色坐标	White	W_x	Normal $\theta = \Phi = 0^\circ$	0.295	0.315	0.335	-
		W_y		0.323	0.343	0.363	
	Red	R_x		-	-	-	
		R_y		-	-	-	
	Green	G_x		-	-	-	
		G_y		-	-	-	
	Blue	B_x		-	-	-	
		B_y		-	-	-	
Uniformity 均匀度		U_L	$\theta = \Phi = 0^\circ$	80	-	-	%
Flicker 闪烁		-	-	No Visible			-


4.2 Measurement system

4.2.1 LCM Viewing Angle

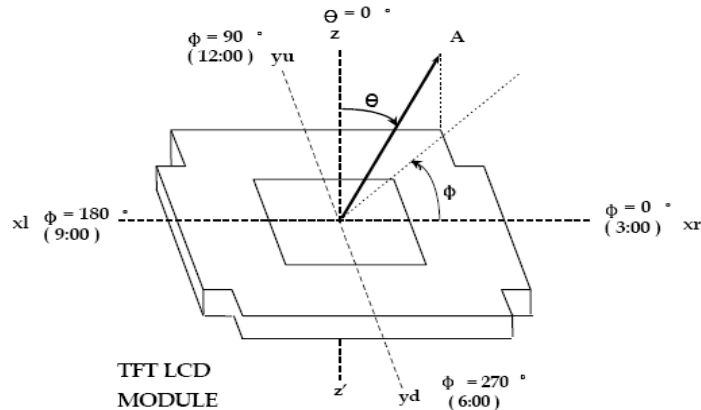

Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface.

4.2.2 Response time

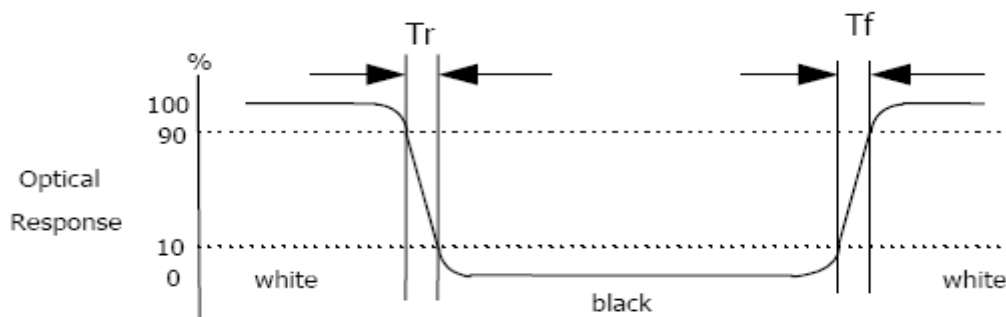

Response time is the time required for the display to transition from white to black (Rising time, T_r) and from black to white (Falling time, T_f) for additional information.

4.2.3 Contrast Ratio (CR)

Contrast Ratio (CR) is defined mathematically as:

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

Surface luminance is the center point across the LCD surface 500mm from the surface with all pixels displaying white.




5. Mechanical Drawing

A


Front View

Side View

Back View

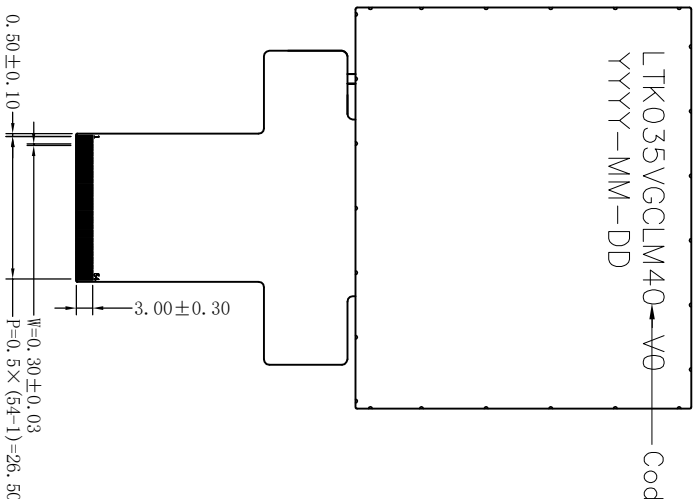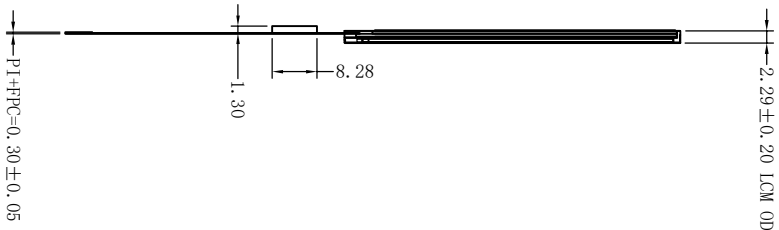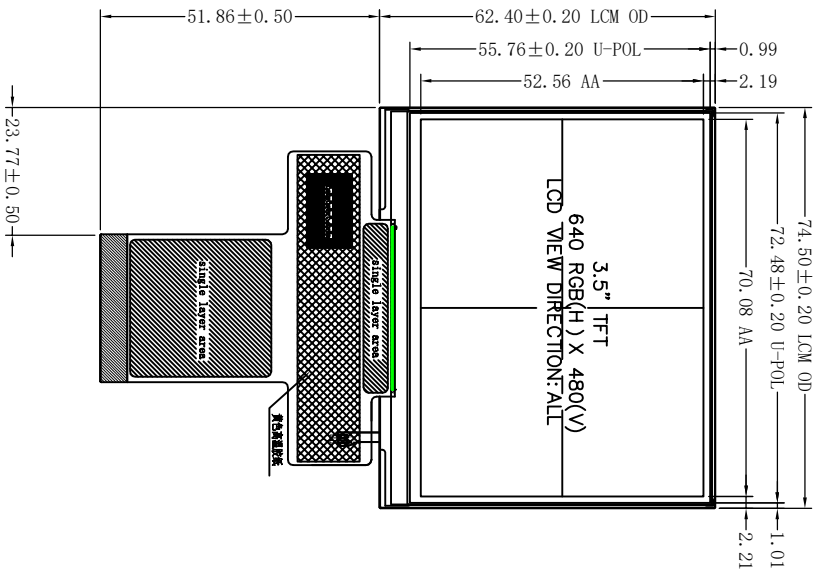

- Notes:
1. Display : 3.5", TFT
 2. Resolution: 640XRGBx480
 3. LCD Viewing Direction: 85/85/85/85
 4. Drive IC:NV3052
 5. Display Mode: Normally Black/Transmissive
 6. LCM Luminance:400cd/m2(Typ)
 7. umark Tolerance:±0.2
 8. OPERATING TEMP: -20° C ~ +70° C
 9. STORAGE TEMP: -30° C ~ +80° C
 10. Requirements on Environmental Protection: ROHS



LED CIRCUIT DIAGRAM:
IF = 40mA, VF = 19.2V

3	2	1	0
REV	NEW	DATE	NAME
		2023.10.30	Jerry



LEADTEK COMPANY LIMITED

SCALE: 1/1	UNIT: mm	PAGE: 1/1	APPROVE	CHECK	DRAWN
Part No:	LTK035VGCLM40	VER: V0	Ian	Jona	Jerry
Customer No:					

PIN NO.	SIGNAL	PIN NO.	SIGNAL
1	LEDK	28	R0
2	LEDK	29	R1
3	LEDA	30	R2
4	LEDA	31	R3
5	NC	32	R4
6	NC	33	R5
7	SPSD	34	R6
8	RESET	35	R7
9	SPENA	36	HSYNC
10	SPCLK	37	VSYNC
11	SPDAT	38	DOTCLK
12	B0	39	(NC)AVDD
13	B1	40	(NC)AVDD
14	B2	41	VCCID
15	B3	42	VCC
16	B4	43	NC
17	B5	44	(NC)VGL
18	B6	45	(NC)VGL
19	B7	46	NC
20	G0	47	(NC)VGH
21	G1	48	XR
22	G2	49	YD
23	G3	50	XL
24	G4	51	YU
25	G5	52	DEN
26	G6	53	DGND
27	G7	54	DGND

D

6. Reliability Test Items

Test Item	Test Condition	Test result determinant gist
High temperature storage	80±3°C , 24H ;	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 1. Air bubble in the LCD; 2. Non-display; 3. Glass crack; 4. The electrical characteristics requirements shall be satisfied.
Low temperature storage	-30±3°C , 24H ;	
High temperature operation	70±3°C , 24H ;	
Low temperature operation	-20±3°C , 24H ;	
High temperature /humidity	60°C±3°C, 90%±3%RH , 24H ;	
Thermal Shock	-30°C/0.5h~+80°C/0.5h for a total 24 cycles ;	
Vibration Test	Frequency 10Hz~55Hz~10Hz Amplitude : 1.5mm, X , Y , Z direction for total 1H ; (Packing condition)	
ESD test	±2KV, Human Body Mode, 150pF/330Ω ; ±8KV, Air Mode, 150pF/330Ω ;	

7.Packing

TBD

7.1. Storage Method

- 1.Store in an ambient temperature of $23^{\circ}\text{C}\pm 5^{\circ}\text{C}$, and in a relative humidity of $55\%\pm 15\%$. Don't exceed 12 months and expose to sunlight or fluorescent light.
2. Store in a clean environment, free from dust, active gas, and solvent.
3. Store in antistatic container.

8. Precautions

Please pay attention to the following when you use this TFT LCD module

8.1. Mounting Precautions

- (1) You must mount a module using arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And, the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (1) Please attach a transparent protective plate to the surface in order to protect the polarizer.
Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not describe because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizer with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are determined to the polarizer)
- (7) When the surface becomes dusty, please wipe gently with adsorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizer. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

8.2 Operating Precautions

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage: $V=\pm 200\text{mV}$ (Over and under shoot voltage)
 - (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
 - (3) Brightness depends on the temperature. (In lower temperature, it becomes lower)
- And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (2) Be careful for condensation at sudden temperature change. Condensation makes damage To polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
 - (5) When fixed patterns are displayed for a long time, remnant image is likely to occur. (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and Shielding methods may be important to minimize the interference.

8.3 Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wristband etc. And don't touch interface pin directly.

8.4 Precautions for Strong Light Exposure

Strong light exposure causes degradation of polarizer and color filter.

8.5 Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped

8.6 Handling Precautions for protection film

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. Is apt to remain on the polarizer. Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



深圳市丽台电子有限公司

Shenzhen Leadtek Electronics Co.,Ltd

Quality inspection standards

品质允收标准

MODEL No. / 产品型号: Applies 0.95~5.0 TFT-LCD PanelUPDATED DATE / 生效日期: 2022-05-20VERSION / 版本: A0

Customer Signature/客户签字: _____

RECORD OF REVISION/修订履历:

Version 版本	Revision Record 修订内容	Compile 修订者	Date of Revision 修订日期
V0	首发/Starting	Green	2022.05.20

1.Scope 1适用范围

This document shall be applied to 0.95~5.0 TFT-LCD Panel.

本文件适用于0.95~5.0 TFT-LCD Panel.

2.Inspection and Environment onditions/检查条件与环境

2.1 Inspection Conditions 检查条件:


(1) Inspection Distance检测距离: 35 cm $\pm$ 5cm

(2) Each picture /每个画面: 2~3 secs/秒, Cosmetic Insp./外观10~12 secs/秒

(3) View Angle观看角度:

Light-on Inspection Angle点灯检验角度 : $\pm 45^\circ$

Cosmetic Inspection Angle外观检验角度 : $\pm 45^\circ$

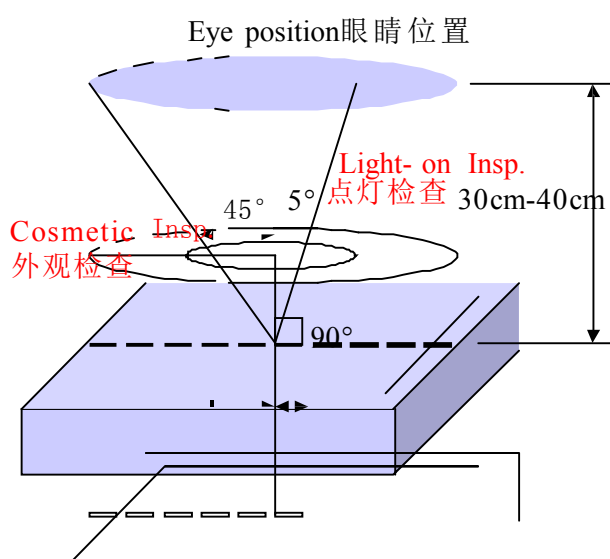

(Perpendicular to LCD panel surface垂直于液晶显示表面)

2.2 Environment Conditions环境条件:

Ambient Temperature 温度		25 $^\circ$ C $\pm$ 5 $^\circ$ C
Ambient Humidity 湿度		55 $\pm$ 5%RH
Ambient Illumination 亮度	Cosmetic Inspection 外观检验	800-1000 Lux
	Functional Inspection 点灯检验	200~300Lux

2.3 Sampling Conditions 抽样条件:

(1) Lot Size : Quantity of shipment lot per model/.

批量: 单次运送单一机型数量

- (2) Sampling Method :
抽样方法:

Sampling Plan 抽样计划		GB2828/2003
		Normal Inspection, Single Sampling 正常检验、单次抽样
		General II Inspection 普通二级
AQL	Major Defect 主要缺点	0.25
	Minor Defect 次要缺点	0.65

- (3) The classification of Major(MA) and Minor(MI) defects is shown as 3. Inspection Criteria.

主缺(MA)及次缺(MI)定义于”3.检查标准”

3.Terms and Definitions/术语和定义

3.1 Classification of defects缺陷的分类:

Major defects: A major defect is a defect that is likely to result in failure, or to reduce materially the usability of the product for its intended purpose.

主要缺陷：会导致产品功能失效或减少产品可用性的缺陷。


Minor defects: A minor defect either is a defect that is not likely to reduce materially the usability of the product for its intended purpose, or is a departure from an established having little bearing on the effective use or operation of the product.

次要缺陷：不会导致产品功能失效，不会减少产品的有效使用和操作。

- 3.2 Extraneous substances that can be wiped out ,like Finger point,Particles are not considered as a defect . 可以被擦拭干净的表面物质不视为缺陷 (如手指印，尘粒) 。

- 3.3 Defects on the Black Matraix(outside of Active Area) are not considered as a defect . BM 区域 (AA 区以外) 的缺陷不视为缺陷。

- 3.4 Size of circular defect,is defined by diameter”D” 。 The defect average diameter $D=1/2(W+L)$ 圆形缺陷的大小是由直径 D 定义的。缺陷的平均直径 $D=1/2(W+L)$

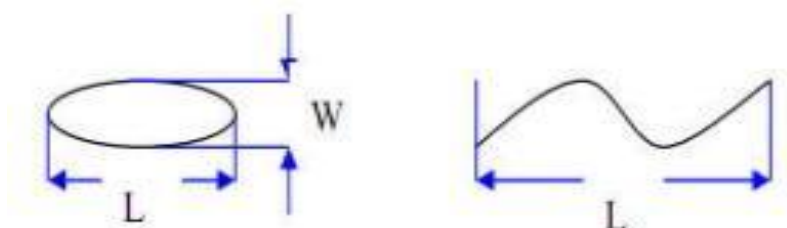

3.5 When defect size $L \geq 2W$, the defect count as liner type defect. Size of linear defect is defined by length(L) and the maximum width(W).

当缺陷尺寸 $L \geq 2W$ 时，被视为线状缺陷。线状缺陷是由长度 (L) 和最大宽度 (W) 定义的。3.6 Mura criteria :judged by ND filter6%,and can't be seen under at ND filter 6% .

3.6 MURA 判断标准：使用 ND6%判定，且透过 ND6%，遮住不可见。

3.7 Dot defect is defin as the defective area of the dot is larger than 50% of the dot area and is visible through 6% ND filter

DOT 定义为点缺陷面积大于 50% DOT 面积, 且透过 ND6%遮住是可见的。


The drawing of 1/2 area sub-pixel definition: The 1/2 area sub-pixel can be defined as below one or more of specific shapes

1/2 面积的子像素定义绘图：1 / 2 面积的子像素可以定义为如下一个或多个特定形状图：




3.8 A dot defect that is smaller than the defined dot defect will be treated as small bright dot. 细碎亮点：小于“DOT 定义”的点缺陷视为细碎亮点。

I 区与 O 区比例：1： 2： 1

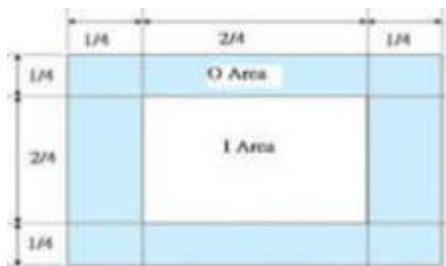

3.9 Inspection method of ND Filter - holding ND filter in front of the panel around 5cm and examine the panel from 35±5 cm in the front view for 2~3 second.

ND 卡的检查方法：在面板上方大约 5CM 处握住 ND 卡，眼睛距离面板 30-40CM，通过 2~3 秒观察。

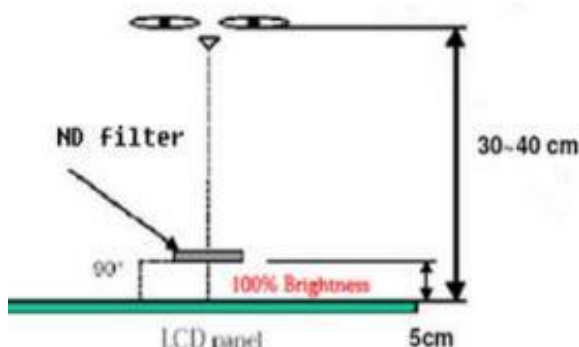

4. Inspection Criteria 检验标准

4.1 Appearance Inspection specification 外观检查规格:

Judge area 区域	Judge item 项目	Specification inspection 检查规格	Judge criterion	
			Major	Minor
Silicone 硅胶	Silicone spread 硅胶涂布	The height can't over C/F , color filter , or gommu 高度不能过超 C/F		MI
	Silicone residue 硅胶残余	Can't cover polarizer, FPC ...etc. 不能覆盖 POL, FPC 等		MI
LCD 玻璃	Wire(on Array) 线路	No damage 不能损伤	MA	
	Edge 边缘	No extended crack 不可有延伸性裂纹	MA	
PCBA Connector FPC/FFC	Appearance 外观	Scratch or damage result in copper expose is not allowed 划伤或损伤不允许导致出现露铜		MI
	Component 零件	No damage 不能损伤	MA	
	Connection status 连接状况	Need correct connection 需要正确连接	MA	
	Broken 破裂	Not allowable 不允许	MA	
	Folding sign 对位记号折叠	Not allowable 不允许	MA	
POL 偏光片	Scract on the polarizer 偏光片划伤	1.W≤0.05mm; L≤5mm, Ignore (忽略)		MI
		2.0.05mm<W≤0.10mm ; L≤5mm ; N≤3 ; DS≥10mm		
		3.0.10mm<W; 5mm<L , Not allowable不允许		

Judge area 区域	Judge item 项目	Specification inspection 检查规格	Judge criterion	
			Major	Minor
POL 偏光片	Dent on the polarizer 偏光片凹痕	1.D<0.15mm, Ignore (忽略)		MI
		2.0.15mm<D≤0.30mm; N≤3; DS≥10mm		
		3.0.30mm<D, Not allowable不允许		
	POL Linear bubble 线状气泡	1.W≤0.05mm; L≤5mm, Ignore (忽略)		MI
		2.0.05mm<W≤0.10mm; L≤5mm; N≤3; DS≥10mm		
		3.0.10mm<W; 5mm<L, Not allowable不允许		
	POL dot bubble 点状气泡	1.D<0.15mm, Ignore (忽略)		MI
		2.0.15mm<D≤0.30mm; N≤3; DS≥10mm		
		3.0.30mm<D, Not allowable不允许		
	POL edge bubble 片边缘气泡	1. The display area is 1/2BM outside, Not allowable 显示区往外 1/2BM 区域内, 不允许		MI
		2. The display area is outside the outer 1/2BM area, Not allowable 显示区往外1/2BM区域以外, 不管控		

Judge area 区域	Judge item 项目	Specification inspection 检查规格	Judge criterion	
			Major	Minor
TP&CG	Foreign Material in spot shape 点状异物	1.D≤0.15mm; Ignored (忽略) 2.0.15mm<D≤0.30mm; N≤3; DS≥10mm 3.D>0.30mm; Not allowable不允许		MI
	Fisheye/bubbles 鱼眼/气泡	1.D≤0.15mm; Ignored (忽略) 2.0.15mm<D≤0.30mm; N≤3; DS≥10mm 3.D>0.30mm; Not allowable不允许		MI
	Scratches on the surface 表面划伤	1.W≤0.05mm; Ignored (忽略) 2.0.05mm<W≤0.10mm, L≤5mm; N≤3; DS≥10mm 3.W>0.10mm, L>5mm; Not allowable不允许		MI
	Collapse corner、Crash edge 崩角、崩边	Product front:/产品正面: collapse corners, collapsed edges are not allowed 崩角、崩边不允许; Product back/产品背面: X≤0.5, Y≤0.5, Z≤1/2T; N≤2; DS≥10mm	MA	
	Printed fonts/LOGO 丝印/LOGO	Printed fonts/LOGO clarity、complete、content right 字体/LOGO丝印清晰、完整、内容正确		MI
	Broken 破损	Not allowable不允许	MA	
	Dirty surfaces 表面脏污	Dirt cannot be wiped, Not allowable 不可擦拭的脏污, 不允许		MI
	IR hole IR孔	Black spots/黑点: W ≤0.15mm, N≤2, Not visible against a black background/黑色背景下不可见		MI
		IR hole Scratches: 1.W<0.03mm, Ignored (忽略) (Dense points Not allowable 不允许密集); 2.0.03mm<W≤0.08mm; L≤2mm; N≤2; 3.W>0.08mm, L>2mm, Not allowable 不允许		MI

4.2 Electrical Inspection specification 电性检查规格:

Item 项目	Judgment Criteria 判定标准	Judge criterion	
		Major	Minor
LCD Bright /Dark dot 玻璃亮点/暗点	1.D $\leq$ 0.15mm, Ignored (忽略), Not dense (不可密集) 2.0.15mm<D $\leq$ 0.30mm; N $\leq$ 3; DS $\geq$ 10mm 3.D>0.30mm, Not allowed/不允许		MI
Mura	Invisible through 6% ND filter, 200~300Lux 透过ND6% 遮住, 目测不可见即为OK, 200~300Lux		MI
Small bright dot 细碎亮点	Not allowed if it can be observed through ND Filter6% 透过ND6%目测看得见, 不允许		MI
ZBD Rate 玻璃亮点比率	90:10		MI
Light Leakage 漏光	Invisible through 6% ND filter, OK 透过ND6%遮住目测不可见即为OK If necessary,set up set up Limit Sample. 如果有必要,可制订限度样品		MI
Bubble in Cell (LC Bubble/Actice Area) CELL气泡 (AA区LCD气泡)	Eyes should not find it . 目视观察不可见, 视为 OK	MA	

Item 项目	Judgment Criteria 判定标准	Judge criterion	
		Major	Minor
Foreign Material in spot shape 点状异物	1. $D \leq 0.15\text{mm}$, Ignored (忽略) 2. $0.15\text{mm} < D \leq 0.30\text{mm}$; $N \leq 3$; $DS \geq 10\text{mm}$ 3. $D > 0.30\text{mm}$, Not allowable/不允许		MI
Foreign Material in line or spiral shape 线状异物	1. $W \leq 0.05\text{mm}$, Ignored (忽略) 2. $L \leq 5\text{mm}$; $0.05\text{mm} < W \leq 0.10\text{mm}$; $N \leq 3$ 3. $W > 0.10\text{mm}$; $L > 5\text{mm}$, Not allowable/不允许		MI
White dot in back-light 白点	1. $D \leq 0.15\text{mm}$, Ignored (忽略) 2. $0.15\text{mm} < D \leq 0.30\text{mm}$; $N \leq 3$; $DS \geq 10\text{mm}$ 3. $D > 0.30\text{mm}$, Not allowed/不允许		MI
TP no touch 无触摸	Not allowable 不允许	MA	
Abnormal Disply 显示异常	Not Allowed 不允许	MA	
NO display 无显示	Not Allowed 不允许	MA	
Line Defect 缺线	Not Allowed 不允许	MA	
Angle of view error 视角错误	Not Allowed 不允许	MA	
Tect crostalk 不消失的残影	Not Allowed 不允许	MA	