



RAYSTAR

曜凌光電股份有限公司

住址: 42878 台中市大雅区科雅路 25 號 5F WEB: <http://www.Raystar-Optronics.com>
5F., No.25, Keya Rd., Daya Dist., Taichung E-mail: sales@raystar-optronics.com
City 428, Taiwan Tel:886-4-2565-0761 Fax : 886-4-2565-0760

RFC570B-SCW-LNN

SPECIFICATION

CUSTOMER:

APPROVED BY	
PCB VERSION	
DATE	

FOR CUSTOMER USE ONLY

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY

Release DATE:

TFT Display Inspection Specification: <https://www.raystar-optronics.com/download/products.htm>

Precaution in use of TFT module: <https://www.raystar-optronics.com/download/declaration.htm>

Revision History

VERSION	DATE	REVISED PAGE NO.	Note
0	2015/12/24		First issue
A	2016/01/21		Modify Static electricity test
B	2016/08/11		Modify Vibration test
C	2016/11/17		Modify Summary
D	2019/01/10		Add Uniformity
E	2019/10/09		Modify Contour Drawing

Contents

1.Module Classification Information

2.Summary

3.General Specification

4.Interface

5.Contour Drawing

6.Block Diagram

7.Absolute Maximum Ratings

8.Electrical Characteristics

9.TIMING TABLE

10.Optical Characteristics

11.Reliability

12.Other

1.Module Classification Information

R	F	C	57	0B	-	S	C	W	-	L	N	N
1	2	3	4	5	-	6	7	8	-	9	10	11

Item	Description	
1	R : Raystar Optonics Inc.	
2	Display Type : F→TFT Type, J→ Custom TFT	
3	Solution: A: 128x160 B:320x234 C:320x240 D:480x234 E:480x272 F:800x480 G:640x480 H:1024x600 I:320x480 J:240x320 K:1280x800 L:240x400 M:1024x768 N:128x128 O:480x800 P:640x320 Q:800x600 S:480x128 T:800x320	
4	Display Size : 5.7" TFT	
5	Version Code.	
6	Model Type: A : TFT LCD E : TFT+FR+CONTROL BOARD J : TFT+FR+A/D BOARD N : TFT+FR+A/D BOARD+CONTROL BOARD S : TFT+FR+POWER BOARD (DC TO DC) 1 : TFT+CONTROL BOARD	6 : TFT+FR H : TFT+D/V BOARD I : TFT+FR+D/V BOARD B : TFT+POWER BD
7	Polarizer Type, Temperature range, View direction	I→Transmissive, W. T, 6:00 ; C→Transmissive, N. T, 6:00 L→Transmissive, W.T,12:00 ; F→Transmissive, N.T,12:00 Y→Transmissive,W.T, IPS TFT ; A→Transmissive, N.T, IPS TFT Z→Transmissive, W.T, O-TFT R→Transmissive, Super W.T, O-TFT N→Transmissive, Super W.T, 6:00; Q→Transmissive, Super W.T, 12:00 V→Transmissive, Super W.T, VA TFT
8	Backlight	W : LED, White H : LED, High Light White F : CCFL, White
9	Driver Method	D: Digital A: Analog L : LVDS M:MIPI
10	Interface	N : without control board A : 8Bit B : 16Bit S:SPI Interface R: RS232 U:USB I: I2C
11	TS	N : Without TS S : resistive touch panel C : capacitive touch panel capacitive touch panel (G-F-F) G : capacitive touch panel(G-G)

2.Summary

TFT 5.7” is a TN transmissive type color active matrix TFT liquid crystal display that use amorphous silicon TFT as switching devices. This module is a composed of a TFT_LCD module, It is usually designed for industrial application and this module follows RoHs,

RAYSTAR OPTRONICS

3.General Specifications

- Size: 5.7 inch
- Dot Matrix: 320 x RGBx240(TFT) dots
- Module dimension: 160.0(W) x 109.0(H) x 15.0(D)mm
- Active area: 115.20 x 86.40 mm
- Dot pitch: 0.12 x 0.36 mm
- LCD type: TFT, Normally White, Transmissive
- View Direction: 12 o'clock
- Gray Scale Inversion Direction: 6 o'clock
- Aspect Ratio: 4:3
- Backlight Type: LED, Normally White
- With /Without TP: Without TP
- Surface: Glare

*Color tone slight changed by temperature and driving voltage.

4.Interface

4.1. LCM PIN Definition

Pin	Symbol	Function	Remark
1	LED+	Power supply for Backlight +	
2	LED-	Power supply for Backlight -	
3	RX3+	+ LVDS differential data input	
4	RX3-	- LVDS differential data input	
5	GND	Ground	
6	RXC+	+ LVDS differential clock input	
7	RXC-	- LVDS differential clock input	
8	GND	Ground	
9	RX2+	+ LVDS differential data input	
10	RX2-	- LVDS differential data input	
11	GND	Ground	
12	RX1+	+ LVDS differential data input	
13	RX1-	- LVDS differential data input	
14	GND	Ground	
15	RX0+	+ LVDS differential data input	
16	RX0-	- LVDS differential data input	
17	L/R	Shift direction of device internal shift register control.	Note 1,2
18	U/D	Up/down selection	Note 1,2
19	VCC	Digital power: 3V~3.6V	
20	VCC	Digital power: 3V~3.6V	
21	NC	No connection	
22	NC	No connection	
23	NC	No connection	
24	NC	No connection	

25	NC	No connection	
26	NC	No connection	
27	NC	No connection	
28	NC	No connection	
29	NC	No connection	
30	RESET	Hardware reset	


Note 1: Selection of scanning mode

Setting of scan control input		Scanning direction
U/D	L/R	
L	H	Up to down, left to right
H	L	Down to up, right to left
L	L	Up to down, right to left
H	H	Down to up, left to right


Note 2: Definition of scanning direction Refer to the figure as below:




U/D=L, L/R=H

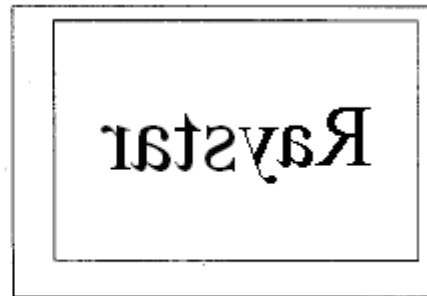

U/D=L, L/R=L

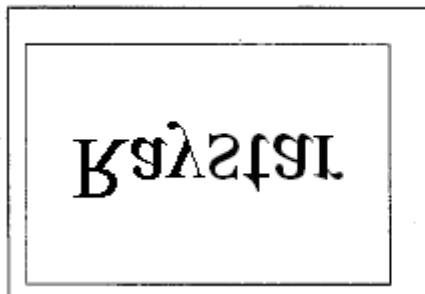


U/D=H, L/R=H

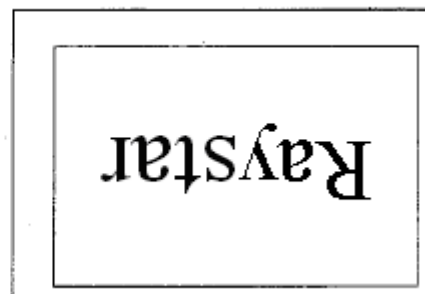


U/D=H, L/R=L

5. Contour Drawing

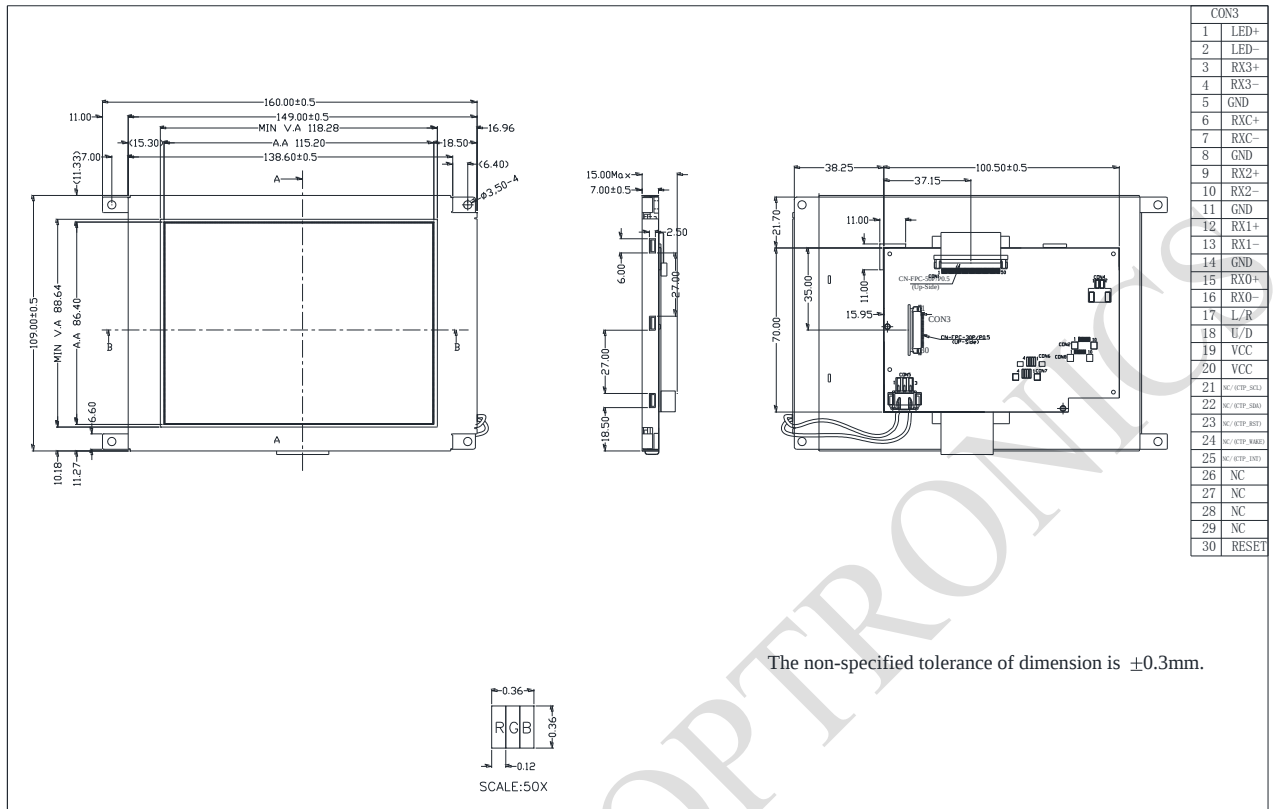

6. Block Diagram

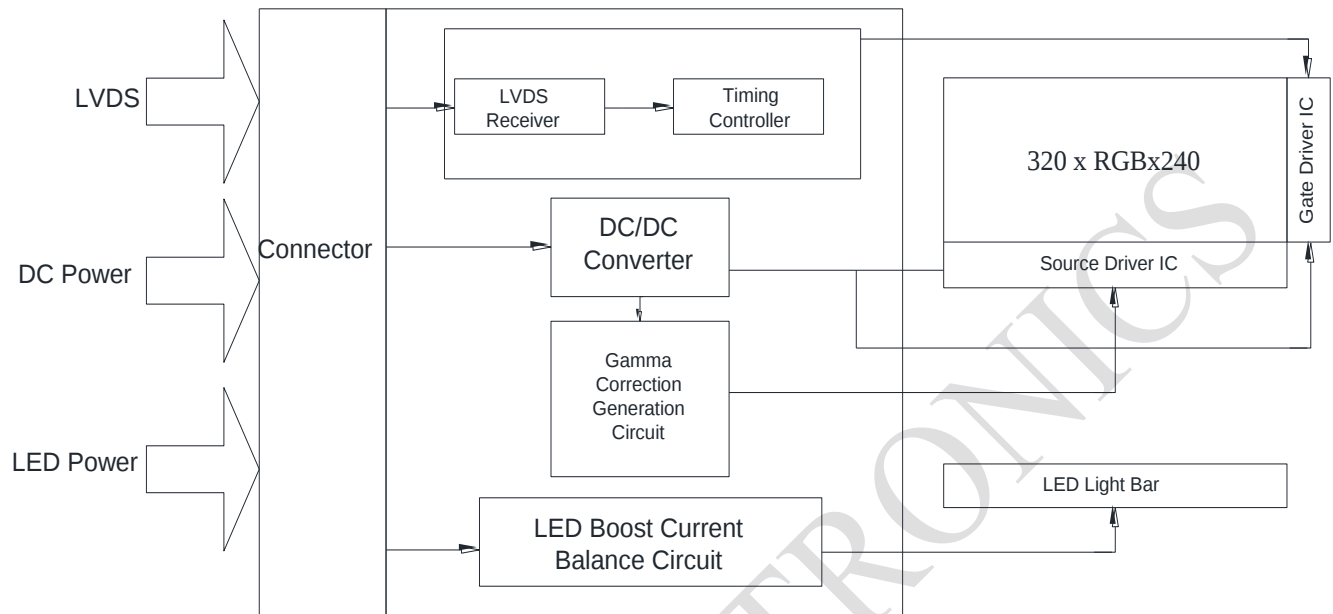

7. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	0	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. $\leq 60^{\circ}\text{C}$, 90% RH MAX. Temp. $> 60^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at 60°C

8. Electrical Characteristics

8.1. Operating conditions:


Item	Symbol	Condition	Min	Typ	Max	Unit	Remark
Supply Voltage For LCM	VCC	—	3.0	3.3	3.6	V	—
Supply Current For LCM	ICC	—	—	210	315	mA	Note1
Input High Volt.	VIH	—	0.7 VCC	—	VCC	V	—
Input Low Volt.	VIL	—	0	—	0.3 VCC	V	—

Note 1 : This value is test for VCC =3.3V , Ta=25 °C only

8.2. LED driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
LED current	-	-	140	-	mA	-
Power Consumption	-	1260	-	1470	mW	-
LED voltage	VBL+	9.0	-	10.5	V	Note 1
LED Life Time	-	-	50,000	-	Hr	Note 2,3,4

Note 1 : There are 1 Groups LED

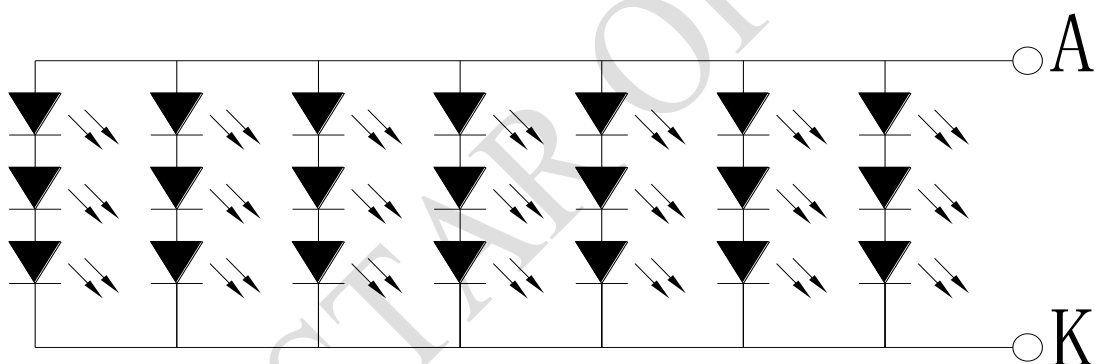


Note 2 : Ta = 25 °C

Note 3 : Brightness to be decreased to 50% of the initial value

Note 4 : The single LED lamp case.

9.TIMING TABLE

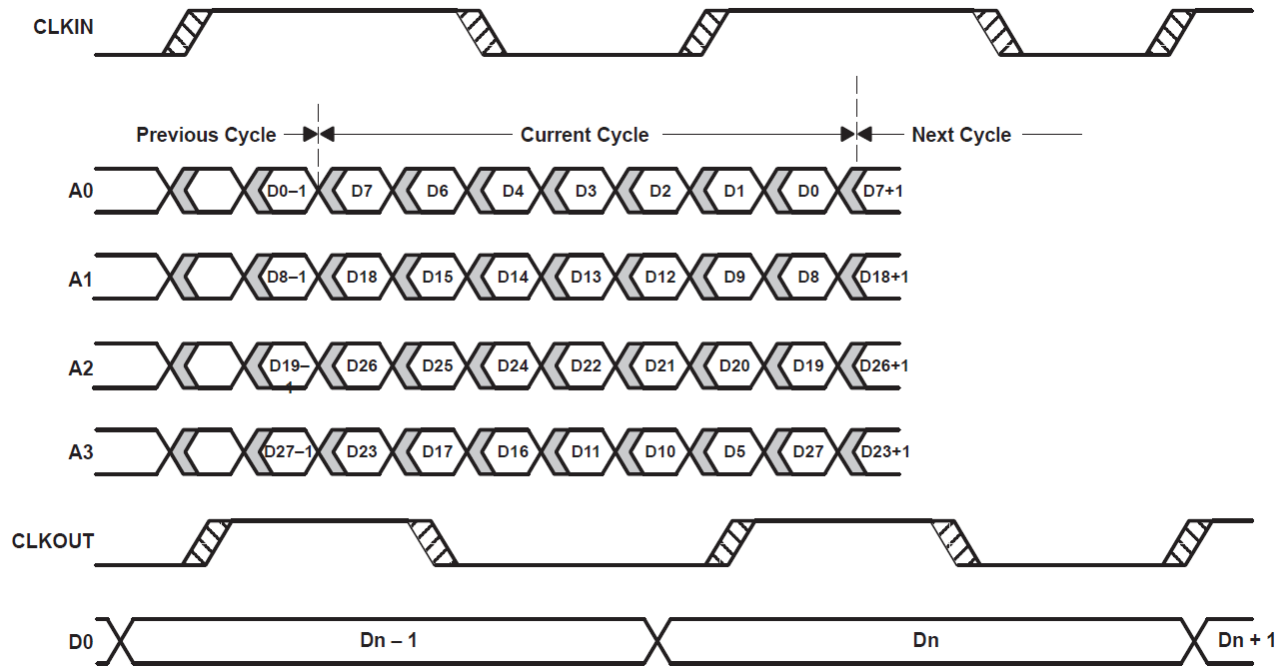

SN75LVDS82 Load and Shift Timing Sequences

10. Optical Characteristics

Item	Symbol	Condition.	Min	Typ.	Max.	Unit	Remark
Response time	Tr	$\theta=0^\circ$ 、 $\phi=0^\circ$	-	15	30	.ms	Note 3,5
	Tf		-	35	50	.ms	
Contrast ratio	CR	At optimized viewing angle	150	250	-	-	Note 4,5
Color Chromaticity	White	$\theta=0^\circ$ 、 $\phi=0^\circ$	0.282	0.312	0.342		Note 2,6,7
	Wy		0.319	0.349	0.379		
Viewing angle (Gray Scale Inversion Direction)	Hor.	θ_R	60	70		Deg.	Note 1
		θ_L	60	70			
	Ver.	ϕ_T	40	50			
		ϕ_B	60	70			
Brightness	-	-	400	500		cd/m2	Center of display
Uniformity	(U)	-	75	-	-	%	Note 5

Ta=25±2℃, IL=140mA

Note 1: Definition of viewing angle range

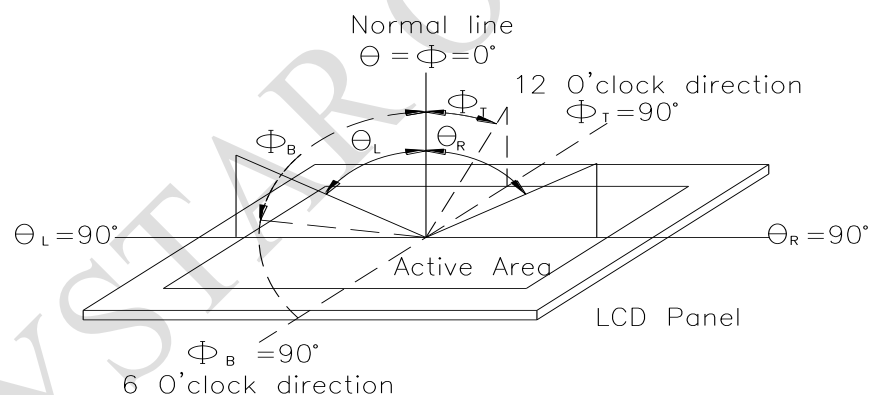


Fig. 10.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


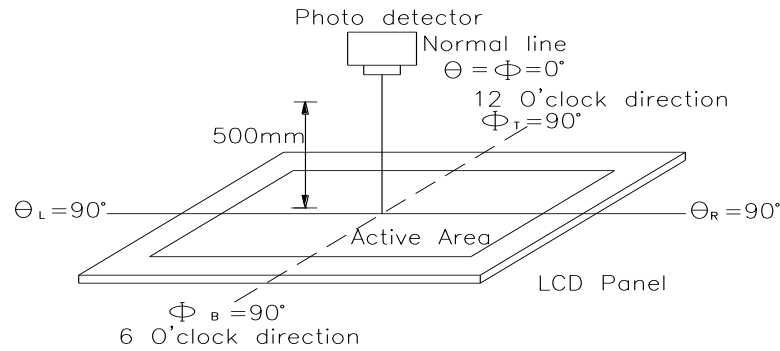


Fig. 10.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time, T_r , is the time between photo detector output intensity changed from 90% to 10%. And fall time, T_f , is the time between photo detector output intensity changed from 10% to 90%

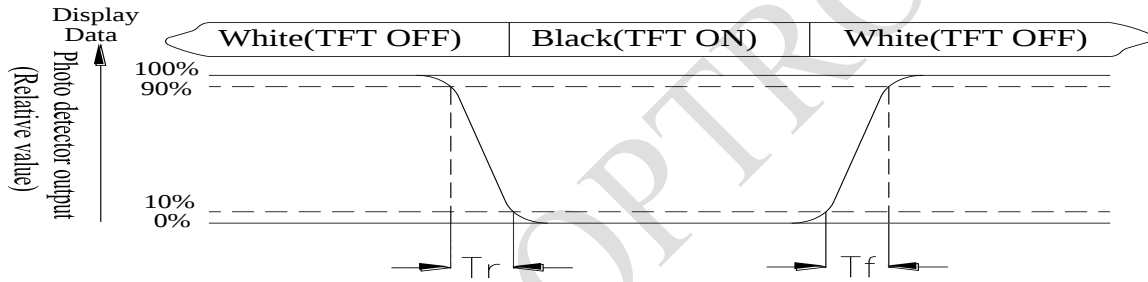

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (reference the picture in below). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (U) = $L_{min}/L_{max} \times 100\%$

L = Active area length

W = Active area width

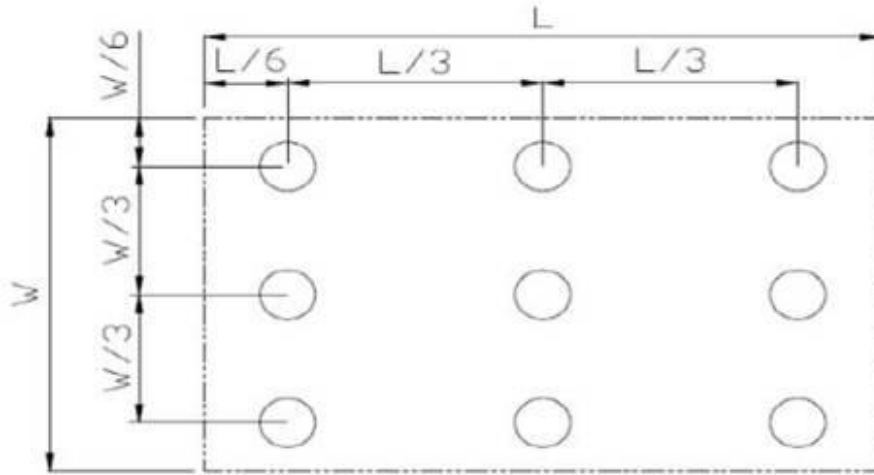


Fig10.3. Definition of uniformity


Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

11. Reliability

Content of Reliability Test (Wide temperature, 0°C~70°C)

Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	0°C 200hrs	1
High Temperature/ Humidity Operation	The module should be allowed to stand at 60 °C,90%RH max	60°C,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation 	0°C/70°C 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±600V(contact), ±800v(air), RS=330Ω CS=150pF 10 times	—

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

LCM Sample Estimate Feedback Sheet		
Module Number : _____		
1 、 Panel Specification :		
1. Panel Type :	☐ Pass	☐ NG , _____
2. View Direction :	☐ Pass	☐ NG , _____
3. Numbers of Dots :	☐ Pass	☐ NG , _____
4. View Area :	☐ Pass	☐ NG , _____
5. Active Area :	☐ Pass	☐ NG , _____
6. Operating Temperature :	☐ Pass	☐ NG , _____
7. Storage Temperature :	☐ Pass	☐ NG , _____
8. Others : _____		
2 、 Mechanical Specification :		
1. PCB Size :	☐ Pass	☐ NG , _____
2. Frame Size :	☐ Pass	☐ NG , _____
3. Material of Frame :	☐ Pass	☐ NG , _____
4. Connector Position :	☐ Pass	☐ NG , _____
5. Fix Hole Position :	☐ Pass	☐ NG , _____
6. Backlight Position :	☐ Pass	☐ NG , _____
7. Thickness of PCB :	☐ Pass	☐ NG , _____
8. Height of Frame to PCB :	☐ Pass	☐ NG , _____
9. Height of Module :	☐ Pass	☐ NG , _____
10. Others :	☐ Pass	☐ NG , _____
3 、 Relative Hole Size :		
1. Pitch of Connector :	☐ Pass	☐ NG , _____
2. Hole size of Connector :	☐ Pass	☐ NG , _____
3. Mounting Hole size :	☐ Pass	☐ NG , _____
4. Mounting Hole Type :	☐ Pass	☐ NG , _____
5. Others :	☐ Pass	☐ NG , _____
4 、 Backlight Specification :		
1. B/L Type :	☐ Pass	☐ NG , _____
2. B/L Color :	☐ Pass	☐ NG , _____
3. B/L Driving Voltage (Reference for LED Type) : ☐ Pass ☐ NG , _____		
4. B/L Driving Current :	☐ Pass	☐ NG , _____
5. Brightness of B/L :	☐ Pass	☐ NG , _____
6. B/L Solder Method :	☐ Pass	☐ NG , _____
7. Others :	☐ Pass	☐ NG , _____

>> Go to page 2 <<

Module Number : _____

5 、 Electronic Characteristics of Module :

1.Input Voltage :	☐ Pass	☐ NG , _____
2.Supply Current :	☐ Pass	☐ NG , _____
3.Driving Voltage for LCD :	☐ Pass	☐ NG , _____
4.Contrast for LCD :	☐ Pass	☐ NG , _____
5.B/L Driving Method :	☐ Pass	☐ NG , _____
6.Negative Voltage Output :	☐ Pass	☐ NG , _____
7.Interface Function :	☐ Pass	☐ NG , _____
8.LCD Uniformity :	☐ Pass	☐ NG , _____
9.ESD test :	☐ Pass	☐ NG , _____
10.Others :	☐ Pass	☐ NG , _____

6 、 Summary :
Sales signature : _____

Customer Signature : _____

Date : / /