


1310 nm Fabry-Perot Laser Butterfly Package

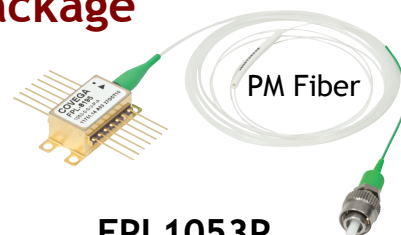

FPL1053P

Description

The FPL1053P is a high power, O-band Fabry-Perot Laser (FPL) Diode based on state-of-the-art, quantum-well epitaxial layer growth and reliable ridge waveguide structure.

This butterfly-packaged laser is coupled to 1.5 m of FC/APC-connectorized fiber. The FPL1053P uses polarization-maintaining single mode fiber. An integrated thermistor allows the laser to be temperature controlled, thus stabilizing the lasing wavelength and power.



Specifications

CW; $T_{CHIP} = 25\text{ }^{\circ}\text{C}$, $T_{CASE} = 0 - 70\text{ }^{\circ}\text{C}$

FPL1053P				
	Symbol	Min	Typical	Max
Center Wavelength	λ_C	1290 nm	1310 nm	1330 nm
Operating Current	I_{OP}	-	400 mA	500 mA
Optical Power @ I_{OP}	P_{OUT}	100 mW	130 mW	-
Spectral Bandwidth (rms)	$\Delta\lambda$	-	5 nm	15 nm
Threshold Current	I_{TH}	-	35 mA	55 mA
Slope Efficiency	$\Delta P / \Delta I$	0.25 W/A	0.35 W/A	-
Forward Voltage @ I_{OP}	V_F	-	1.7 V	2.5 V
TEC Operation (Typical / Max @ $T_{CASE} = 25\text{ }^{\circ}\text{C} / 70\text{ }^{\circ}\text{C}$)				
- TEC Current	I_{TEC}	-	0.25 A	1.5 A
- TEC Voltage	V_{TEC}	-	0.35 V	3.5 V
- Thermistor Resistance	R_{TH}	-	10 k Ω	-




Performance Plots

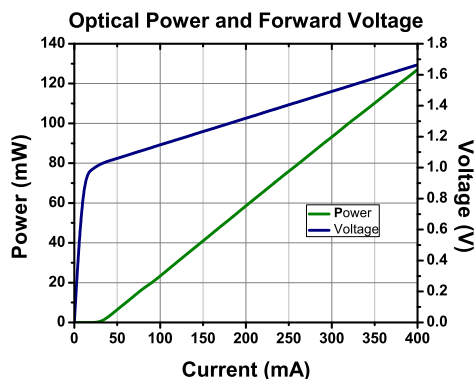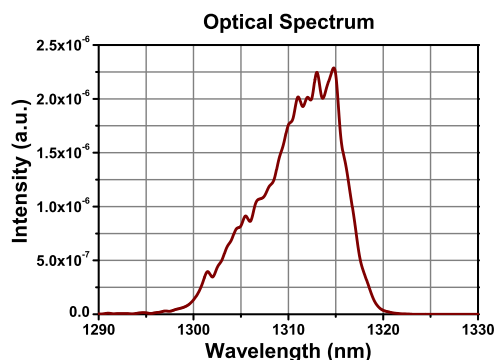

Drawings


Butterfly Top View

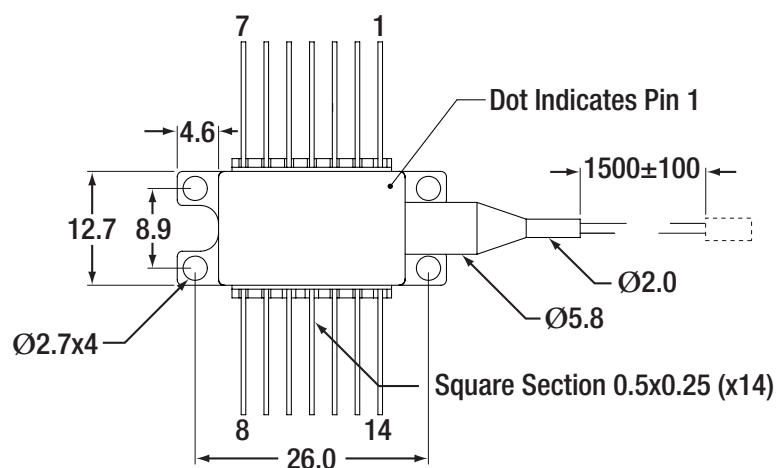


PIN IDENTIFICATION

1. TEC +	14. TEC -
2. Thermistor	13. Case
3. NC	12. NC
4. NC	11. Dev Cathode
5. Thermistor	10. Dev Anode
6. NC	9. NC
7. NC	8. NC

Butterfly Side View

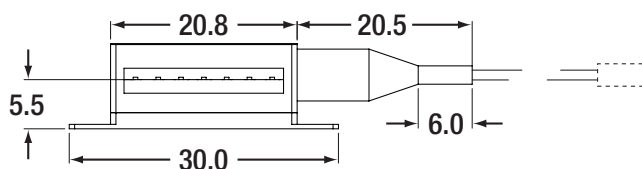

Butterfly Front View

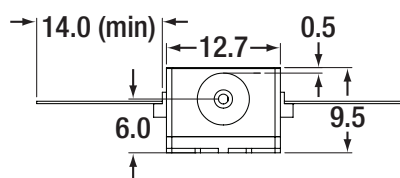

All Dimensions in mm