

NAC



Features

- High attenuation of common mode noise from 150kHz to 1MHz
- Single Phase 250 VAC
- Selectable leakage current
- Quick and easy push-down terminal. Just connect the wires, push down and tighten the screws with a screwdriver.
- DIN rail installation (option)
- RoHS Compliant

Safety Agency Approvals

- UL1283
- CSA C22.2 No.8 (C-UL)
- DIN EN133200 VDE0565 Teil 3-1
- ENEC

| Model | Rated Voltage [V] | Rated Current [A] |
|------------|-------------------|-------------------|
| NAC-06-472 | AC 1- 250 / DC250 | 6 |
| NAC-10-472 | AC 1- 250 / DC250 | 10 |
| NAC-16-472 | AC 1- 250 / DC250 | 16 |
| NAC-20-472 | AC 1- 250 / DC250 | 20 |
| NAC-30-472 | AC 1- 250 / DC250 | 30 |
| NAC-04-472 | AC 1- 250 / DC250 | 4 |

NAC series

NAC -10 -472 -□

① ② ③ ④

- ① Model Name
- ② Rated Current
- ③ Line to ground capacitor code: See table 1.1.
- ④ Options

table 1.1 Line to ground capacitor code

| Code | Leakage Current (Input 125/250V 60Hz) | Line to ground capacitor (nominal value) |
|------|--|---|
| 681 | 75.5 μA/ 150 μA max | 680pF |
| 102 | 0.13mA/ 0.25mA max | 1000pF |
| 222 | 0.25mA/ 0.5 mA max | 2200pF |
| 332 | 0.38mA/ 0.75mA max | 3300pF |
| 472 | 0.5 mA/ 1.0 mA max | 4700pF |


*1 When the line to ground capacitor code is different, the attenuation characteristic is different.

*2 Options
D: DIN rail installation type

* The dimensions change when the option is set. Refer to External view.



RoHS

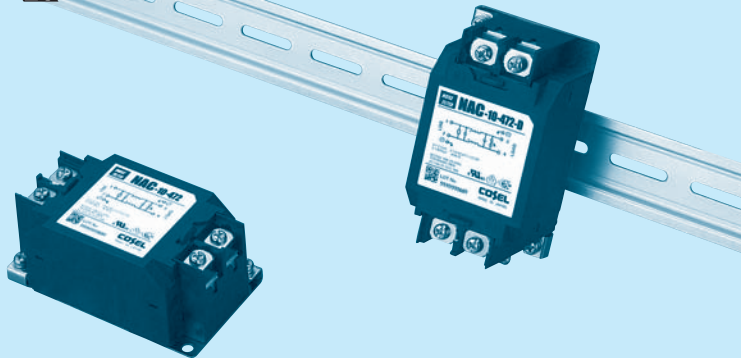

The terminal cover is retracted inside the unit

DIN rail installation type is option

Features of NAC series

High-attenuation type of common mode noise from 150kHz to 1MHz

· Single Phase 250 VAC

· Quick and easy push-down terminal

Just connect the wires, push down and tighten the screws with a screwdriver

Specifications

| No. | Items | NAC-04-472 | NAC-06-472 | NAC-10-472 | NAC-16-472 | NAC-20-472 | NAC-30-472 |
|-----|--|--|------------|------------|------------|------------|------------|
| 1 | Rated Voltage[V] | AC 1 φ 250 / DC250 | | | | | |
| 2 | Rated Current[A] | 4 | 6 | 10 | 16 | 20 | 30 |
| 3 | Test Voltage (Terminal-Mounting Plate) | 2,500 VAC (Cutoff Current = 20mA), 1minute at room temperature and humidity | | | | | |
| 4 | Isolation Resistance (Terminal-Mounting Plate) | 500 VDC 100MΩ minute at room temperature and humidity | | | | | |
| 5 | Leakage current 125/250V 60Hz | 0.5mA/1.0mA max | | | | | |
| 6 | Voltage drop | 1.0V max | | | | | |
| 7 | Safety agency approval temperatures | -25 to +85°C (Refer to Derating Curve) | | | | | |
| 8 | Operating temperature | -40 to +85°C (Refer to Derating Curve) | | | | | |
| 9 | Operating humidity | 20 to 95%RH (Non condensing) | | | | | |
| 10 | Storage temperature/humidity | -40 to +85°C/20 to 95%RH (Non condensing) | | | | | |
| 11 | Vibration | 10 to 55Hz, 19.6m/s ² (2G), 3min. Period, 1hour each X, Y and Z axis | | | | | |
| 12 | Impact | 196.1m/s ² (20G), 11ms Once each X, Y and Z axis | | | | | |
| 13 | Safety agency approvals | UL1283, CSA C22.2 No.8 (C-UL), DIN EN133200 VDE0565 Teil3-1, ENEC (At only AC input) | | | | | |
| 14 | Case size (without projection) /Mass | 53 X 41 X 92 mm (W X H X D) /300g max (Option : -D refer to external view) | | | | | |

Circuit Diagram



Derating Curve



External view

This product is shipped in the following condition, because it is equipped with push-down terminals.

- ① The terminal cover is retracted inside the unit.
- ② The screws for connecting the terminals are held in the up right position.

Standard Type



DIN rail installation Type



■ Note when installing the noise filter on a DIN rail.

When the noise filter is grounded through the DIN rail, the proper noise attenuation may not be achieved.

Be sure to connect the protection earth (PE) of the noise filter body to the earth.





Макро Групп – это:

- дистрибьютор электронных компонентов с 1994 года
- контрактный производитель электроники с 2007 года с собственным производством в Санкт-Петербурге (компания Макро EMC, входит в ГК Макро Групп)
- поставщик полупроводниковых материалов
- комплексный поставщик электронных компонентов
- моделирование и производство полупроводниковых эпитаксиальных гетероструктур для задач оптоэлектроники

Головной офис расположен в Санкт-Петербурге. Собственные представительства в крупных промышленных городах России и стран СНГ.

Преимущества для наших заказчиков:

- работа по тендерам с 2012 года
- оформление банковских гарантий
- отсрочки платежей
- поставка электронных компонентов по проектным ценам
- инженерная поддержка проектов заказчиков
- сертификат системы менеджмента качества ISO 9001-2015
- необходимые сертификаты и лицензии

Данный файл получен с сайта www.macrogroup.ru