


# TX-3535RGB4FC120-OGVCND34-02C

## PRODUCT SPECIFICATION

### Features:

- ◆Excellent transiting heat from LED chip operating under 350mA
- ◆High luminous output
- ◆No UV

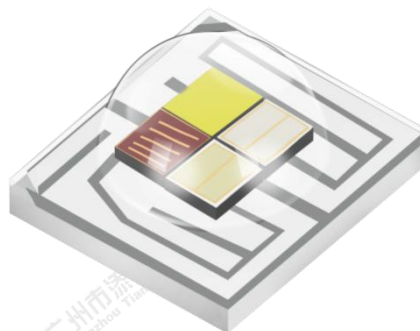

### Chip Material:

- ◆Red: AlGaInP
- ◆Green: GaN
- ◆Blue: GaN
- ◆White: GaN

### Lens Color:


- ◆Water clear

### Applications:

- ◆Portable flashlight
- ◆Garden lighting
- ◆General lighting

|          |                               |          |            |      |         |
|----------|-------------------------------|----------|------------|------|---------|
| Part No. | TX-3535RGB4FC120-OGVCND34-02C | Spec No. | WKF-BE0790 | Page | 1 of 10 |
|----------|-------------------------------|----------|------------|------|---------|

## Package Dimensions:

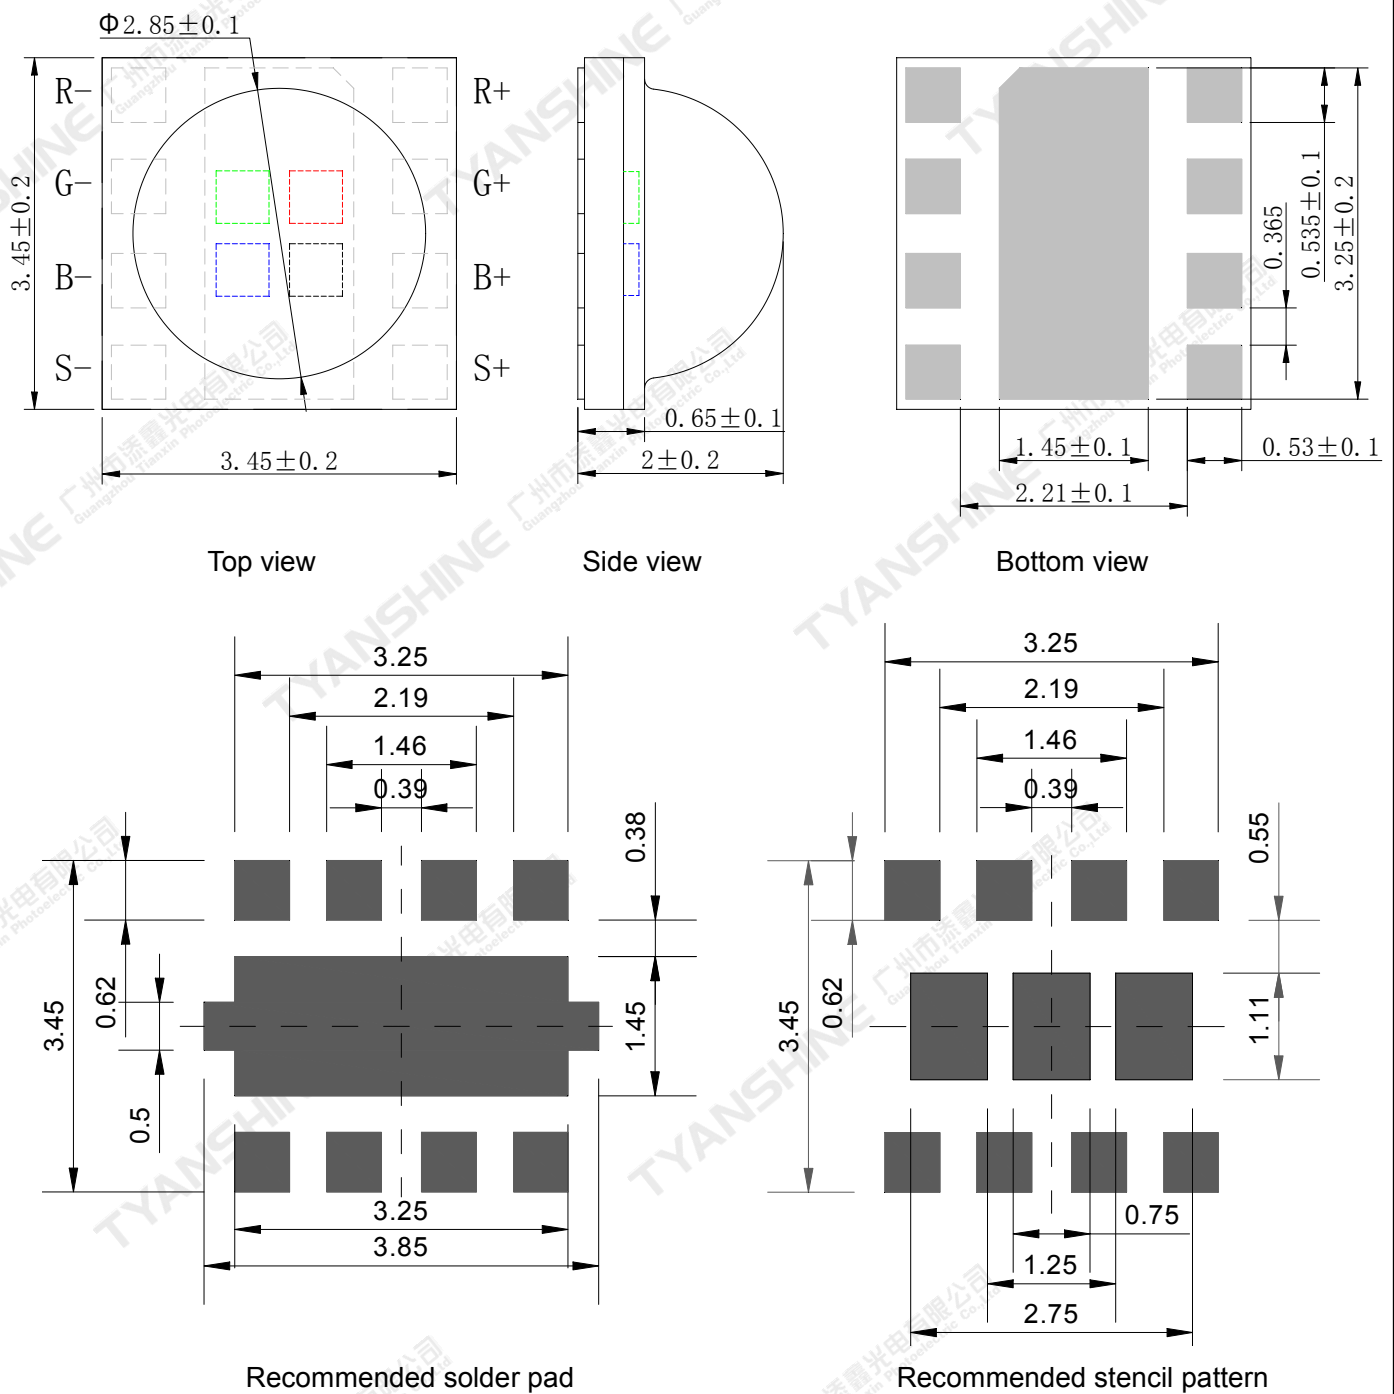

## Notes:

1. All dimensions are in millimeters .
2. Tolerances unless otherwise mentioned are  $\pm 0.1$  mm .

## Absolute Maximum Ratings (Tc=25℃)

| Parameter                               | Symbol |   | Max Ratings                        | Unit |
|-----------------------------------------|--------|---|------------------------------------|------|
| Forward Current                         | IF     |   | 350                                | mA   |
| Reverse Voltage                         | VR     |   | Not designed for reverse operation | V    |
| Power Dissipation                       | PD     | R | 910                                | mW   |
|                                         |        | G | 1260                               |      |
|                                         |        | B | 1260                               |      |
|                                         |        | S | 1260                               |      |
| Junction Temperature                    | Tj     | R | 115                                | ℃    |
|                                         |        | G | 150                                |      |
|                                         |        | B | 150                                |      |
|                                         |        | S | 150                                |      |
| Electrostatic Discharge Threshold (ESD) | ESD    |   | 2000                               | V    |
| Storage Temperature                     | Tstg   |   | -40~70                             | ℃    |
| Operation Temperature                   | Topr   |   | -30~100                            |      |

## Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:  
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

|          |                               |          |            |      |         |
|----------|-------------------------------|----------|------------|------|---------|
| Part No. | TX-3535RGS4FC120-OGVCND34-02C | Spec No. | WKF-BE0790 | Page | 3 of 10 |
|----------|-------------------------------|----------|------------|------|---------|

## Electrical Optical Characteristics (Tc=25°C)

| Parameter                           | Symbol          | Condition | Emitting Color           | Min. | Typ. | Max. | Units   |
|-------------------------------------|-----------------|-----------|--------------------------|------|------|------|---------|
| Luminous Flux                       | $\phi_v$        | If=350mA  | R                        | 40   | 48   | 55   | lm      |
|                                     |                 |           | G                        | 85   | 100  | 110  |         |
|                                     |                 |           | B                        | 15   | 26   | 35   |         |
|                                     |                 |           | S                        | 55   | 65   | 75   |         |
| Dominant Wavelength                 | $\lambda_d$     |           | R                        | 619  | 625  | 631  | nm      |
|                                     |                 |           | G                        | 524  | 530  | 536  |         |
|                                     |                 |           | B                        | 450  | 460  | 472  |         |
| Correlated Colour Temperature       | CCT             |           | S                        | 2100 | 2200 | 2300 | K       |
| Peak-emission Wavelength            | $\lambda_p$     |           | R                        | 624  | 635  | 636  | nm      |
|                                     |                 |           | G                        | 519  | 525  | 531  |         |
|                                     |                 |           | B                        | 459  | 455  | 471  |         |
| Spectral Line Half-Width            | $\Delta\lambda$ |           | R                        | 15   | 17.5 | 20   | nm      |
|                                     |                 |           | G                        | 30   | 35   | 40   |         |
|                                     |                 |           | B                        | 16   | 19   | 22   |         |
|                                     |                 |           | S                        | 17   | 20   | 23   |         |
| Forward Voltage                     | $V_f$           |           | R                        | 2.0  | 2.3  | 2.6  | V       |
|                                     |                 |           | G                        | 2.9  | 3.2  | 3.6  |         |
|                                     |                 |           | B                        | 2.9  | 3.2  | 3.6  |         |
|                                     |                 |           | S                        | 2.8  | 3.1  | 3.4  |         |
| Reverse Current                     | $I_R$           | $V_R=7V$  | R                        | —    | —    | 5    | $\mu A$ |
|                                     |                 |           | G                        | —    | —    | 5    |         |
|                                     |                 |           | B                        | —    | —    | 5    |         |
|                                     |                 |           | S                        | —    | —    | 5    |         |
| Viewing Angle at 50 % IV            | $2\theta_{1/2}$ | —         | —                        | —    | 120  | —    | Deg     |
| Thermal Resistance Junction to Case | $R\theta_{J-C}$ | —         | R                        | —    | 14   | —    | K/W     |
|                                     |                 |           | G                        | —    | 14   | —    |         |
|                                     |                 |           | B                        | —    | 14   | —    |         |
|                                     |                 |           | S                        | —    | 14   | —    |         |
|                                     |                 |           | Total thermal resistance | —    | 7.5  | —    |         |
| Temperature Coefficient of Voltage  | $V\Delta F/T$   | If=350mA  | R                        | —    | -2.7 | —    | mV/℃    |
|                                     |                 |           | G                        | —    | -3.9 | —    |         |
|                                     |                 |           | B                        | —    | -1.6 | —    |         |
|                                     |                 |           | S                        | —    | -1.6 | —    |         |

## White light Color coordinate filing (IF=350mA)



| Region | CCT Range(K) |      | X1     | Y1     | X2     | Y2     | X3     | Y3     | X4     | Y4     |
|--------|--------------|------|--------|--------|--------|--------|--------|--------|--------|--------|
|        | Min          | Max  |        |        |        |        |        |        |        |        |
| AC32   | 2100         | 2150 | 0.5372 | 0.4410 | 0.5309 | 0.4410 | 0.5379 | 0.4500 | 0.5439 | 0.4498 |
| AC21   | 2150         | 2240 | 0.5241 | 0.4322 | 0.5136 | 0.4327 | 0.5198 | 0.4410 | 0.5301 | 0.4400 |
| AC22   |              |      | 0.5301 | 0.4400 | 0.5198 | 0.4410 | 0.5267 | 0.4504 | 0.5379 | 0.4500 |
| AB22   | 2240         | 2300 | 0.5198 | 0.4410 | 0.5132 | 0.4410 | 0.5199 | 0.4507 | 0.5267 | 0.4504 |



## Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.The dominant wavelength ( $\lambda_d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 4.Luminous flux measurement tolerance:  $\pm 15\%$ .
- 5.Forward voltage measurement tolerance:  $\pm 0.15V$ .



## Typical Electrical/Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

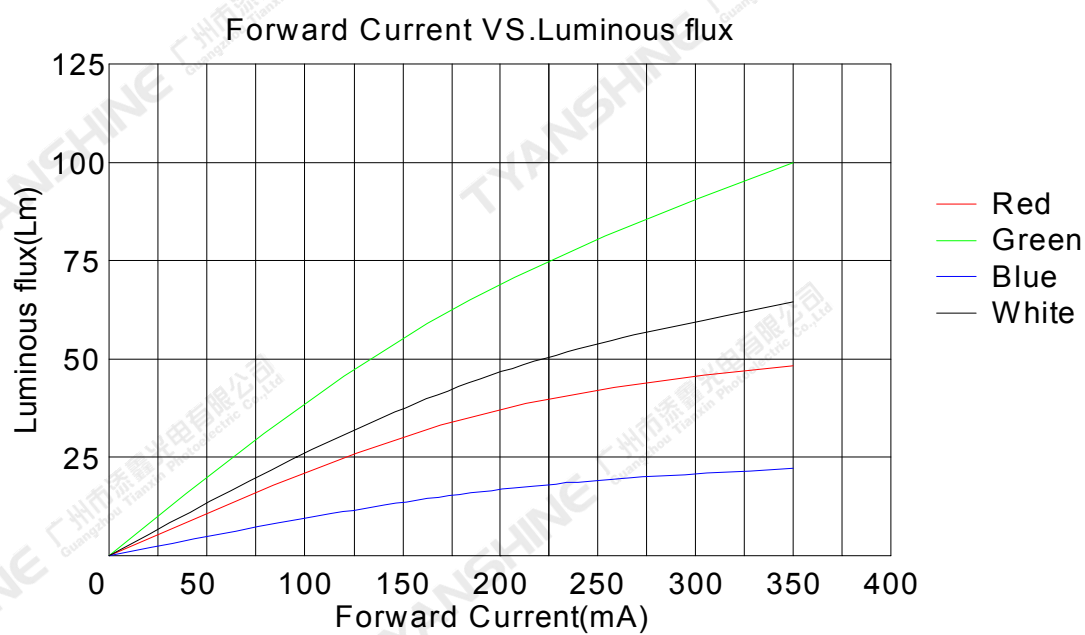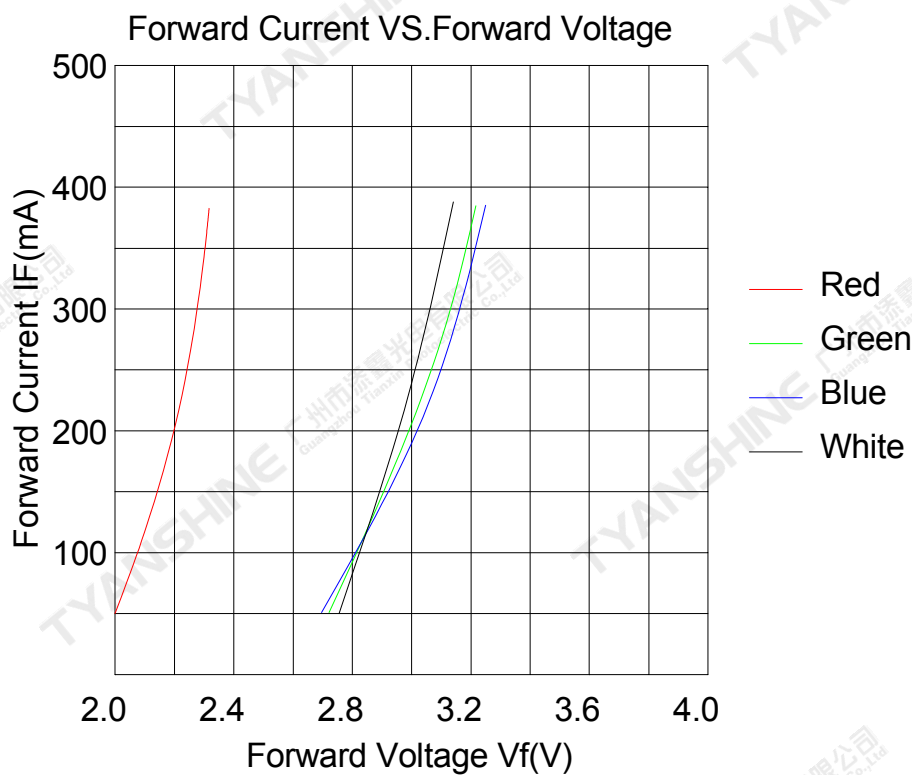

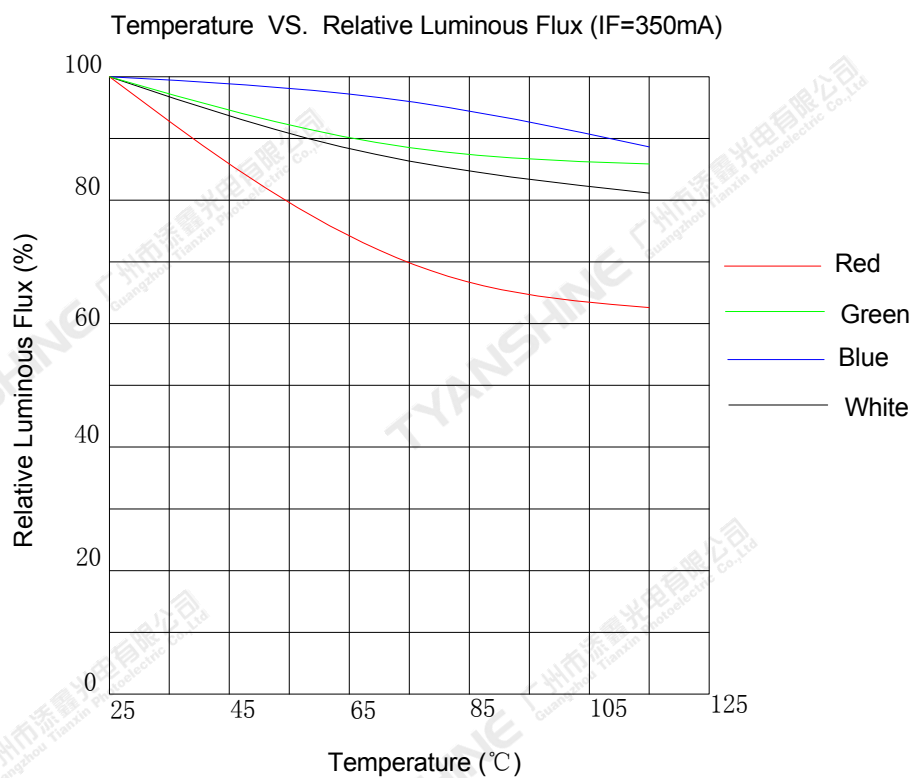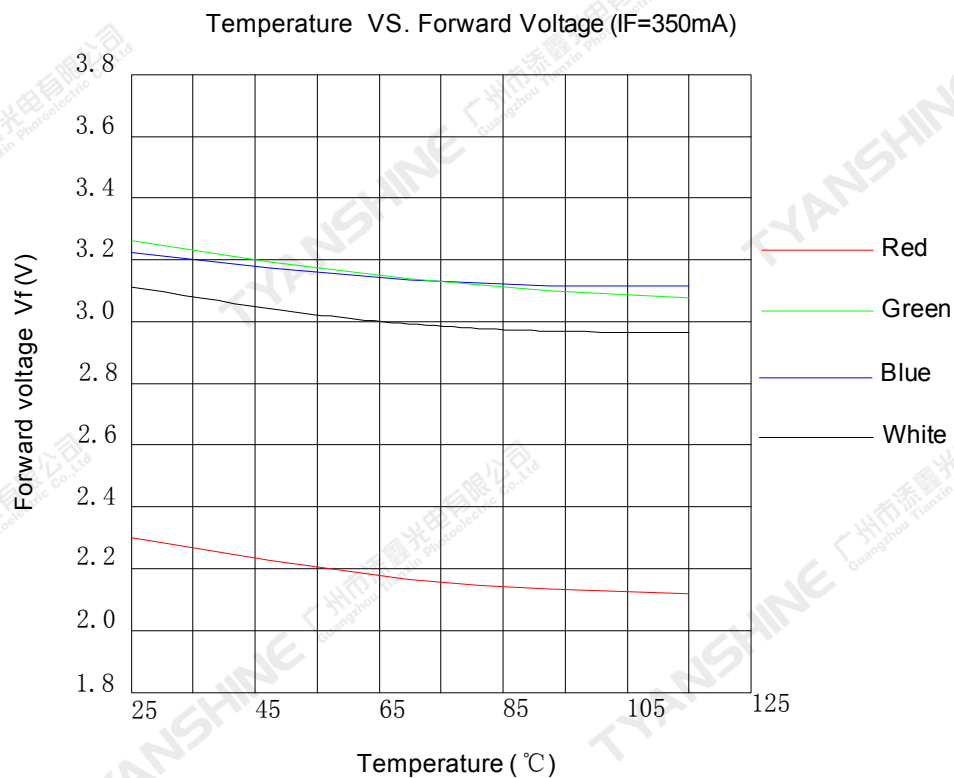

## Relative Spectral Distribution

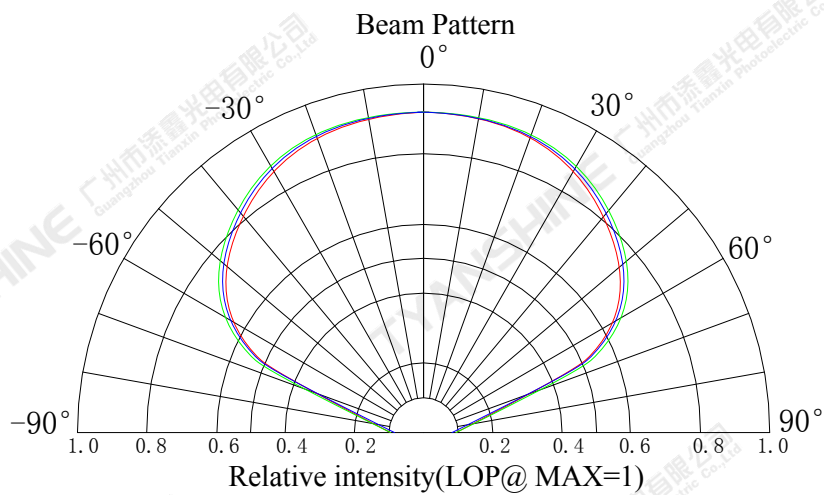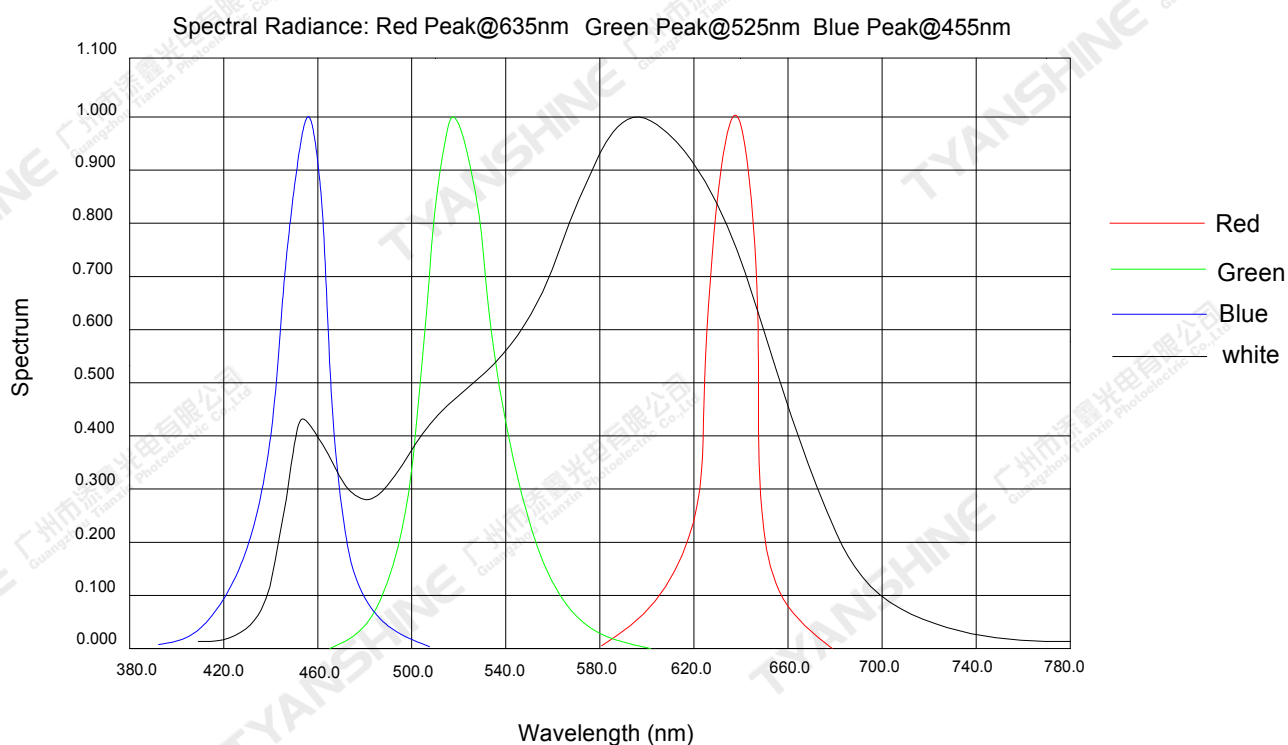

## Notes:

1. 2θ 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 5°.



## Usage Precautions


### Storage Environment Condition

Temperature: 5°C ~ 30°C (41°F ~ 86°F)

Humidity: 60% RH Max.

### Soldering Condition

Use the conditions shown to the under figure.

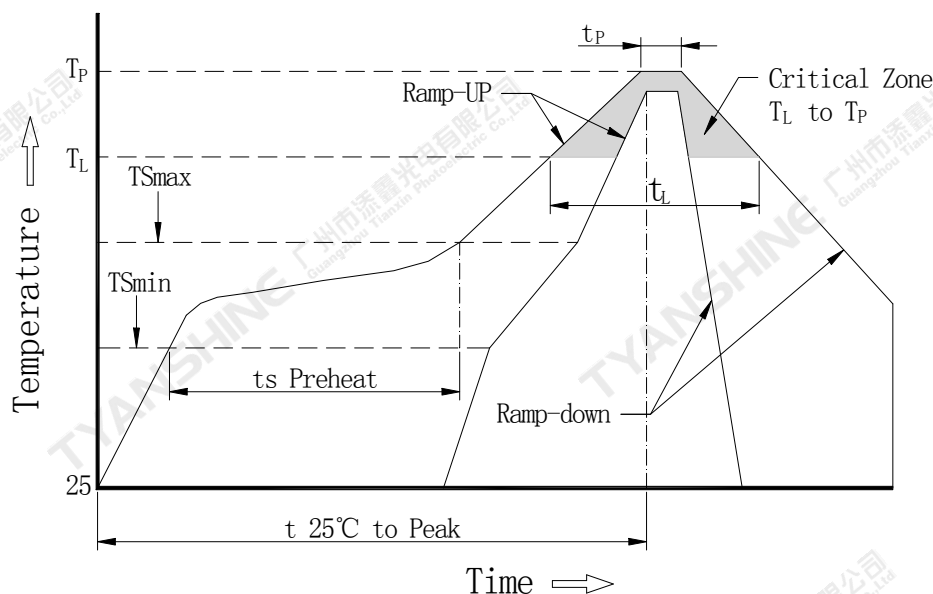



| Profile Feature                                      | Lead-Based Solder |
|------------------------------------------------------|-------------------|
| Average Ramp-Up Rate ( $T_{Smax}$ to $T_P$ )         | 3°C/second max.   |
| Preheat: Temperature Min ( $T_{Smin}$ )              | 100°C             |
| Preheat: Temperature Max ( $T_{Smax}$ )              | 150°C             |
| Preheat: Time ( $T_{Smin}$ to $T_{Smax}$ )           | 60-120 seconds    |
| Time Maintained Above: Temperature ( $T_L$ )         | 183°C             |
| Time Maintained Above: Time ( $T_L$ )                | 60-150 seconds    |
| Peak/Classification Temperature ( $T_P$ )            | 225°C             |
| Time Within 5°C of Actual Peak Temperature ( $T_P$ ) | 10-30 seconds     |
| Ramp-Down Rate                                       | 6°C/second max.   |
| Time 25°C to Peak Temperature                        | 6 minutes max.    |

#### Note:

All temperatures refer to topside of the package, measured on the package body surface.

## Dimensions For Cannulation And Packaging

Quantity: 1000PCS

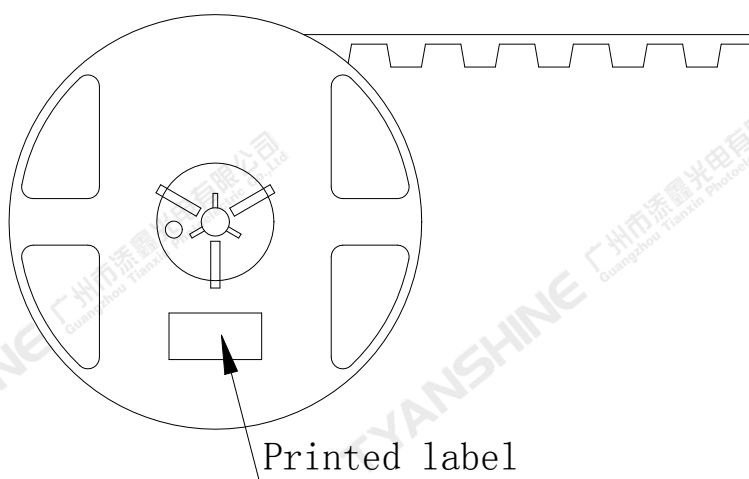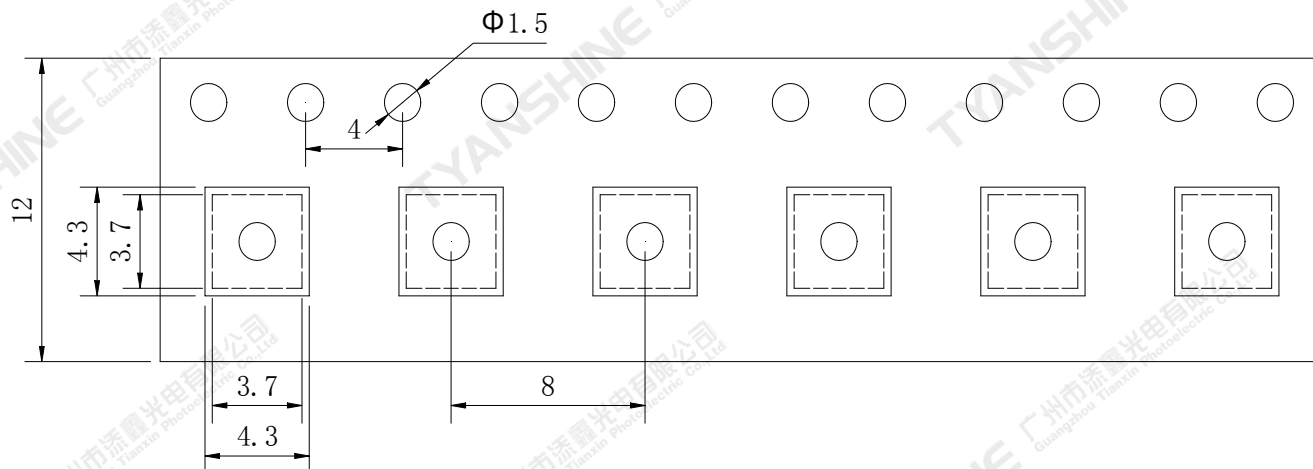

## Notes:

1. All dimensions are in millimeters.
2. Tolerances are  $\pm 2.0$  mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

|          |                                |          |            |      |          |
|----------|--------------------------------|----------|------------|------|----------|
| Part No. | TX-3535RGBS4FC120-OGVCND34-02C | Spec No. | WKF-BE0790 | Page | 10 of 10 |
|----------|--------------------------------|----------|------------|------|----------|