



Product Parameters (产品描述)

产品编号 | Part Number: KB-Y29-xx

出光角度 | Beam Angle: 5/10/20/30/10*30/10*40 °

产品材料 | Material: Lens-PMMA/Holder-PC

工作温度 | Work Temp: <85℃

安装方式 | Fastening: Tape/Pins/Glue

支架颜色 | Holder Color: White/Black

透光率 | Transmittance: 93%

Part Number	Lens Surface	Holder Availability	Dimension	Beam Angle
KB-Y29-5	镜面/clear	-XP-S (for 3535 led) -XML-S (for XML led) -XML-P (for 3535/XML led) -XML-Tape(for XML Led)	Φ31*H16.2mm	~5 °
KB-Y29-5P	珠面/beads		Φ31*H16.2mm	~5 °
KB-Y29-10P	珠面/beads		Φ31*H16.2mm	~10 °
KB-Y29-20P	珠面/beads		Φ31*H16.2mm	~20 °
KB-Y29-30P	珠面/beads		Φ31*H16.2mm	~30 °
KB-Y29-1030	条纹面/ellipse		Φ31*H16.2mm	~10*30 °
KB-Y29-1040	条纹面/ellipse		Φ31*H16.2mm	~10*40 °

Direction for Use


(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40℃ , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.


(双面胶 | TAPE)

- 1, Ensure the assembled pcb is straight, so the tape can be fully sticked to the surface.
- 2, Ensure the assembled pcb is clean and dry, any dirt or unknown chemicals may affect the tape viscous force.
- 3, Stress lens 1~5 seconds after assembly to ensure 100% bond.
- 4, Check lens one by one after assembly to ensure all lens are sticked properly, if lens was not sticked to led perfectly, lens will be a bit suspended, picked it off to stick again or replace with a new tape.





Light Distribution Curve (配光曲线图):

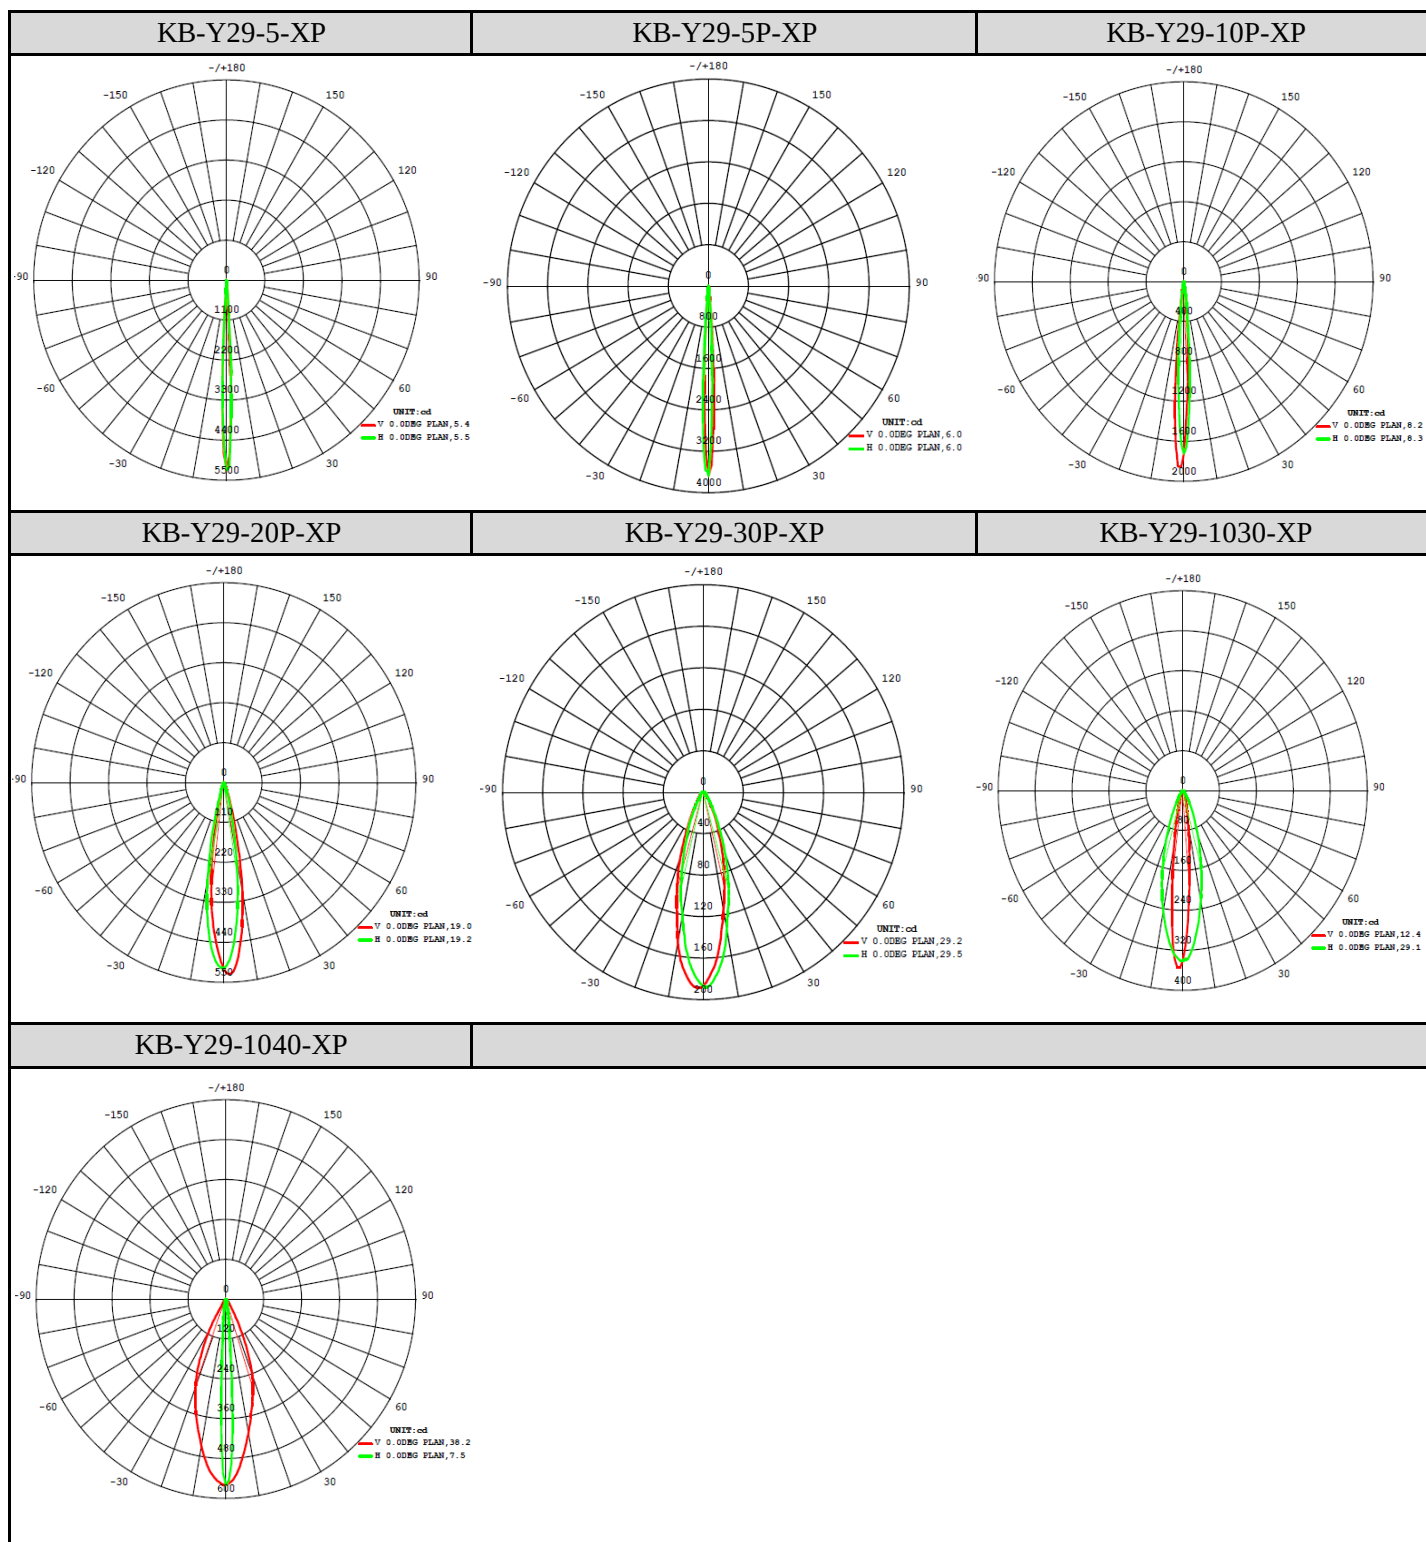



Light Distribution Curve (配光曲线图):

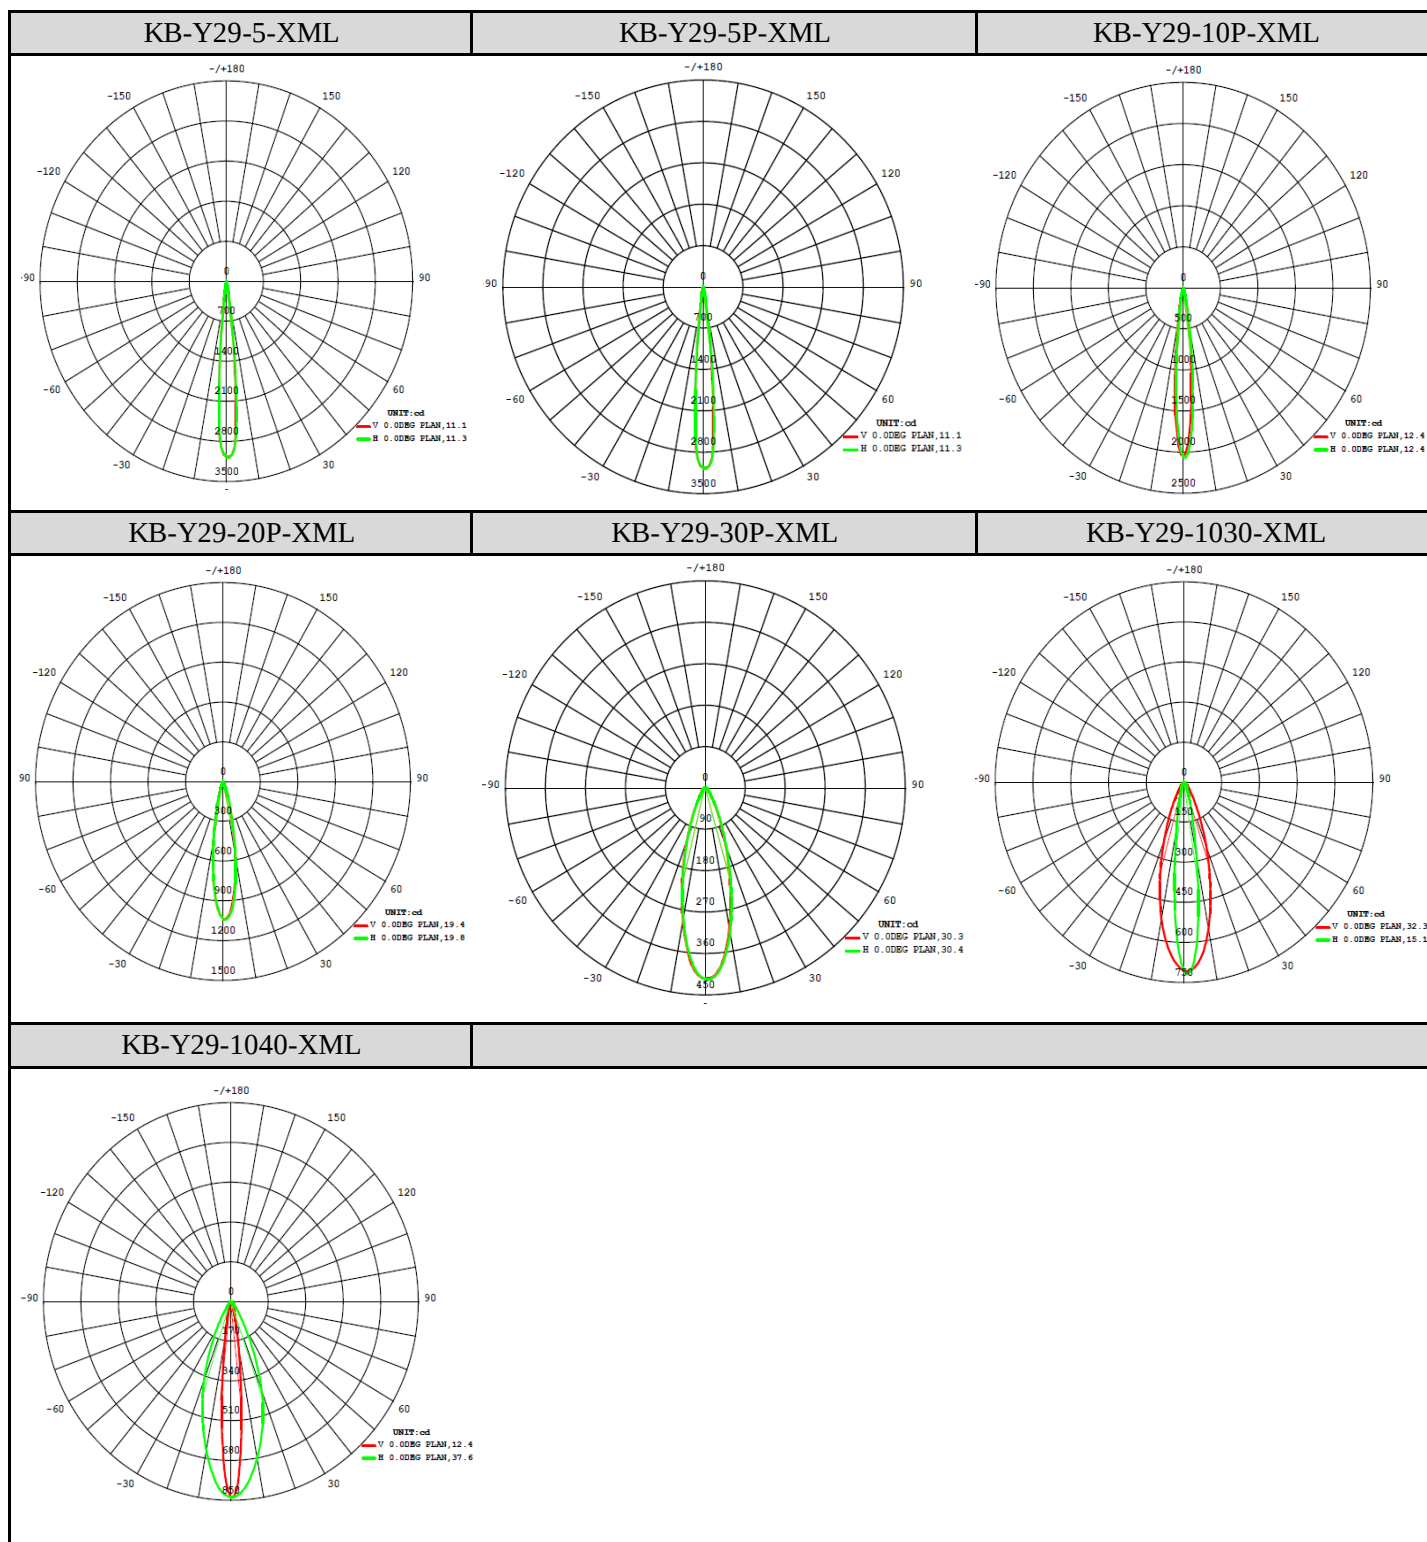

Mechanical Characteristics (产品尺寸):

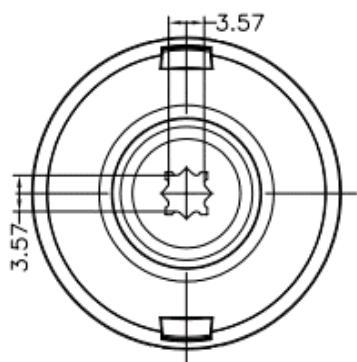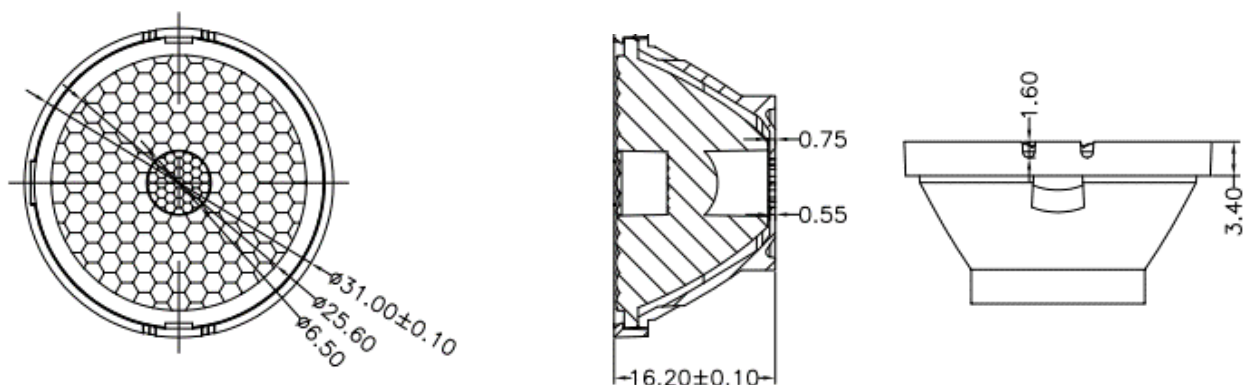


(Holder-for 3535 led)




(Holder-for 5050 led)

Mechanical Characteristics (产品尺寸):

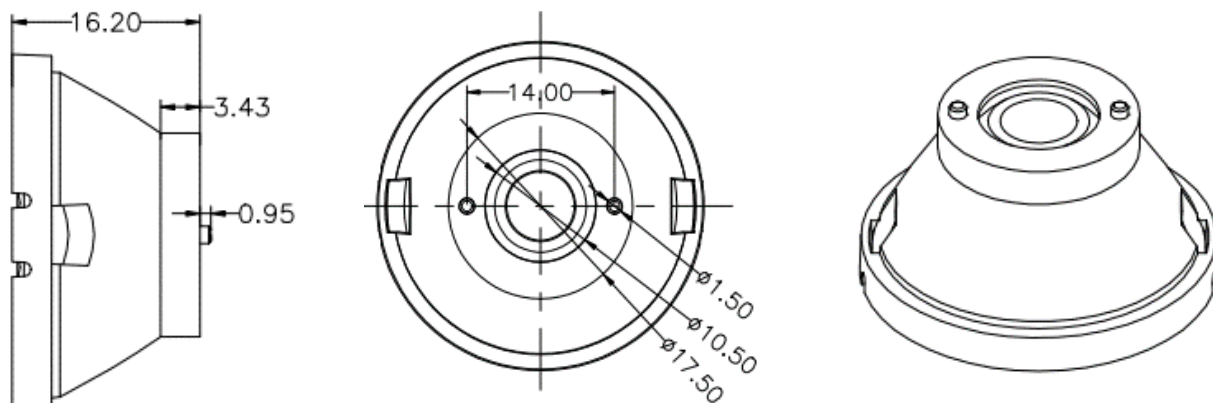


(Holder-for 3535/XML/5050 led)

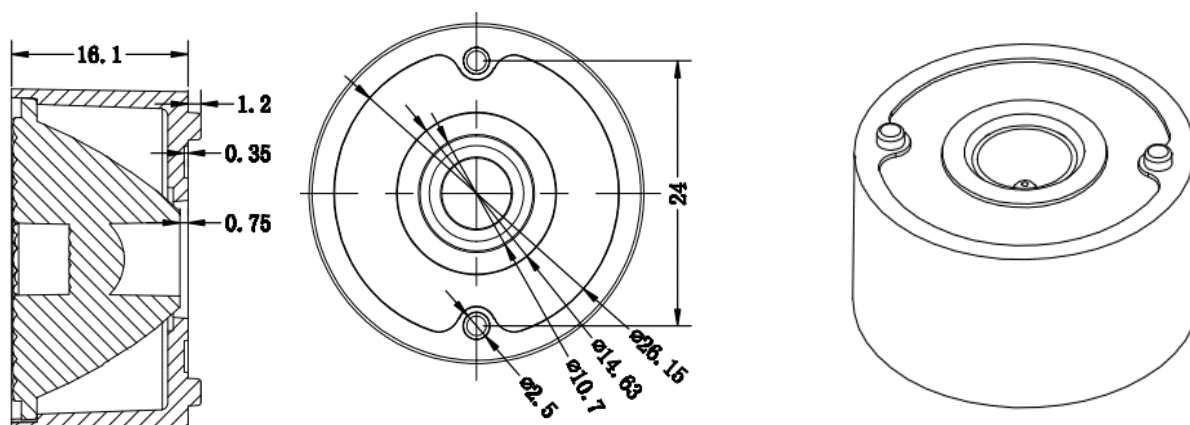

(Tape- Holder- for XML /5050 Led)

Product Package (产品包装):

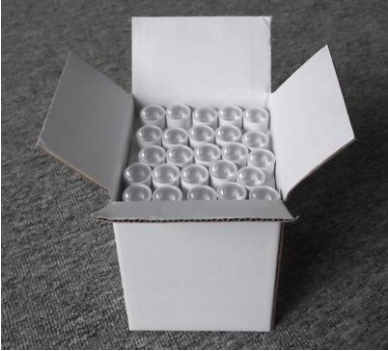Inner Box (内盒)	Outer Carton (外箱)
	
9pcs/layer 54layers/box Gross weight: 0.8kg/box Box dimension: 13*13*13cm	20boxes/carton 1,080pcs/carton Gross weight: 17kg/CTN Carton Dimension: 64*28*32cm