


DESCRIPTION: 0.1W 1.5KVDC Isolated Single Output DC/DC Converters

The TPLE-W1 series are miniature, isolated low power and high efficiency DC/DC converters in a SIP and DIP package. They offer the ideal solution in many space critical applications for board level power distribution. The internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise and 1.5KVDC isolation. Operating temperature:-40°C to 105°C.

FEATURES

RoHS compliant, CE certification	Single output rail	1.5KVDC isolation
High efficiency for low power applications	SIP & DIP package styles	Power density 0.36W/cm ³
UL 94V-0 package material	Footprint from 0.69cm ²	Input voltage: 3.3V, 5V, 12V
Output voltage: 3.3V, 5V, 9V, 12V, 15V	Custom solutions available	Operating temperature:-40°C to 105°C

SELECTION GUIDE

Part Number	Nominal Input Voltage	Output Voltage	Output Current (Max./Min)	Efficiency	Package Style
	V	V	mA	%	
TPLE0303D-W1	3.3	3.3	30.3/3.03	55	DIP
TPLE0305D-W1	3.3	5	20/2	57	DIP
TPLE0503D-W1	5	3.3	30.3/3.03	58	DIP
TPLE0505D-W1	5	5	20/2	58	DIP
TPLE0509D-W1	5	9	11.1/1.11	58	DIP
TPLE0512D-W1	5	12	8.3/0.83	58	DIP
TPLE0515D-W1	5	15	6.7/0.67	58	DIP
TPLE0303S-W1	3.3	3.3	30.3/3.03	58	SIP
TPLE0305S-W1	3.3	5	20/2	58	SIP
TPLE0503S-W1	5	3.3	30.3/3.03	58	SIP
TPLE0505S-W1	5	5	20/2	57	SIP
TPLE0509S-W1	5	9	11/1.1	58	SIP
TPLE0512S-W1	5	12	8.3/0.83	58	SIP
TPLE0515S-W1	5	15	6.7/0.67	58	SIP
TPLE1205D-W1	12	5	20/2	58	DIP
TPLE1209D-W1	12	9	11/1.1	58	DIP
TPLE1212D-W1	12	12	8.3/0.83	58	DIP
TPLE1215D-W1	12	15	6.7/0.67	58	DIP
TPLE1203S-W1	12	3.3	30.3/3.03	58	SIP
TPLE1205S-W1	12	5	20/2	58	SIP
TPLE1209S-W1	12	9	11/1.1	58	SIP
TPLE1212S-W1	12	12	8.3/0.83	58	SIP
TPLE1215S-W1	12	15	6.7/0.67	58	SIP

Add suffix "P" for continuous short circuit protection, for example TPLE0505SP-W1.

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	3.3V input types	2.9	3.3	3.6	V
Voltage range	5V input types	4.5	5.0	5.5	V
Voltage range	12V input types	11	12	13.3	V

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	TA= -40°C to 85°C			0.1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High VIN to low VIN (voltage variation +/-5%)		1.0	1.2	%/%
Load Regulation(10% load to rated load)	5V output types			8	%
Load Regulation(10% load to rated load)	all other types			6	%

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

ABSOLUTE MAXIMUM RATINGS

Short-circuit protection	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage V_{in} , TPLE3.3	5.5V
Input voltage V_{in} , TPLE05	7V
Input voltage V_{in} , TPLE12	15V

ISOLATION CHARACTERISTICS

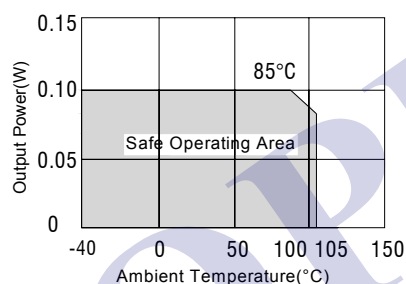
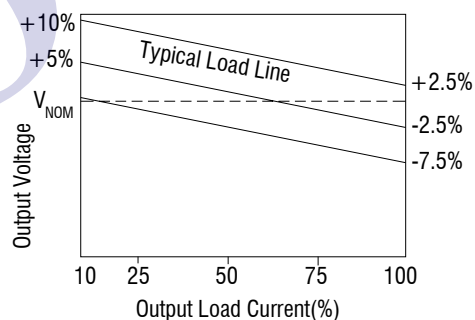
Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Tested for 1 second	1500			VDC
Resistance	Viso= 1000VDC	1			GΩ

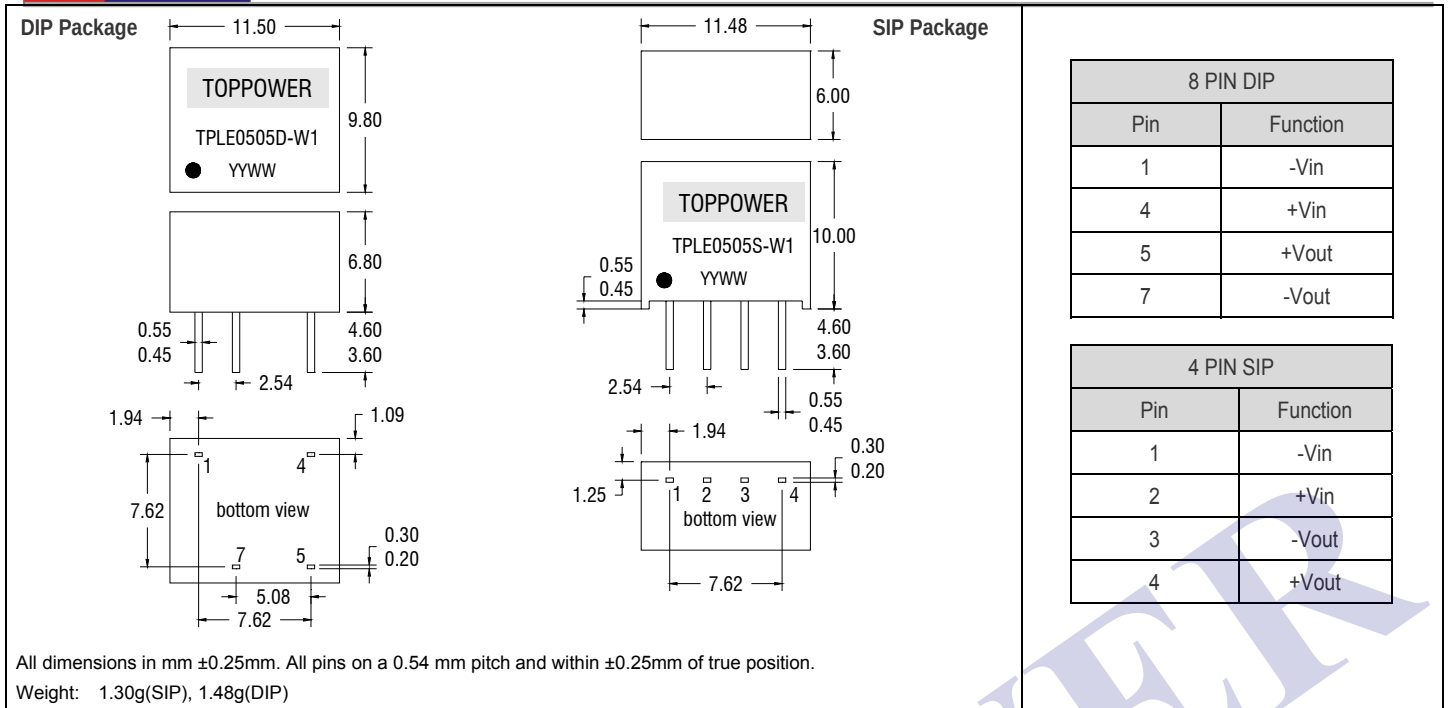
GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	All input types		80		kHz

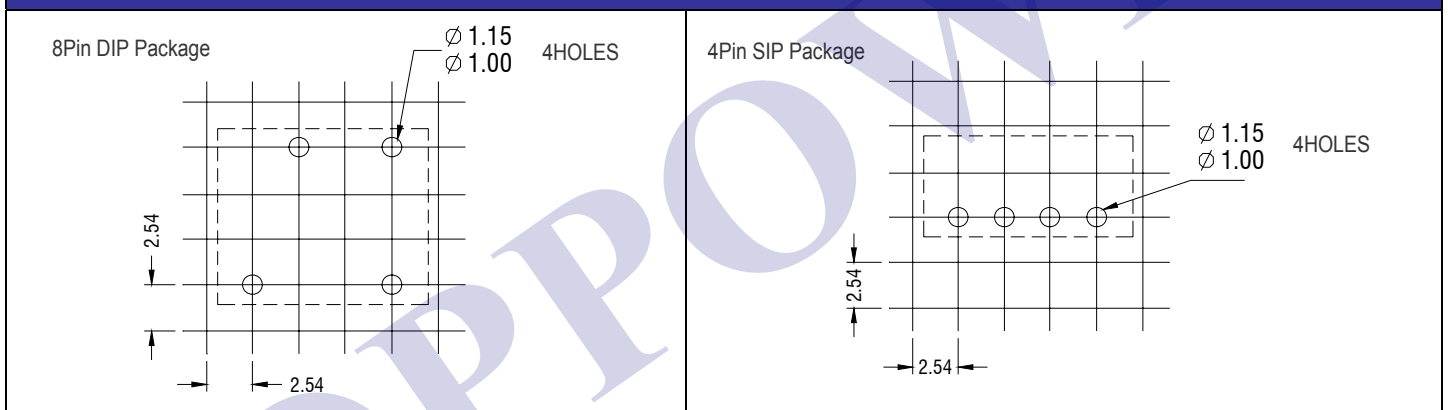
TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	Derating if the temperature $\geq 85^{\circ}\text{C}$	-40		105	$^{\circ}\text{C}$
Storage		-55		130	$^{\circ}\text{C}$
Cooling	Free air convection				

TEMPERATURE DERATING GRAPHS

TOLERANCE ENVELOPES

MECHANICAL DIMENSIONS
PIN CONNECTIONS



RECOMMENDED FOOTPRINT DETAILS



TUBE OUTLINE DIMENSIONS

