



Product Parameters (产品描述)

产品编号 | Part Number: KB-HB/SL28W-LW100-xx-XP
出光角度 | Beam Angle: 60/90/150/ASY
产品材料 | Material: PC
工作温度 | Work Temp: <105℃

安装方式 | Fastening: Screw
防水圈 | Silica seal : available
透光率 | Transmittance: 93%
匹配LED | Match Led: Cree XP/3535 Led

Part Number	Led Qty	Dimension	Beam Angle
KB-HB28W-LW100-60-XP	28pcs	L100*W100MM	~60°
KB-HB28W-LW100-90-XP	28pcs	L100*W100MM	~90°
KB-SL28W-LW100-T5-XP	28pcs	L100*W100MM	Type V 140°
KB-SL28W-LW100-60*100-XP	28pcs	L100*W100MM	~60*100°
KB-SL28W-LW100-70*155-XP	28pcs	L100*W100MM	~70*155°
KB-SL28W-LW100-40*160-XP	28pcs	L100*W100MM	~40*160°


Direction for Use

(透镜 | LENS)


- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40℃ , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Light Distribution Curve (配光曲线图):


KB-HB28W-LW100-60-XP

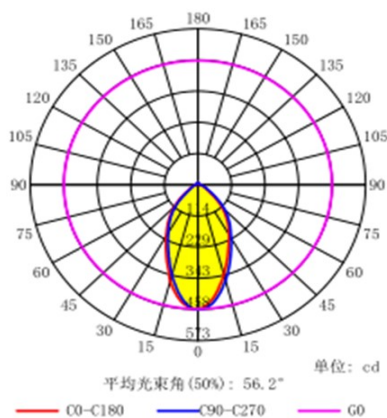

KB-HB28W-LW100-90-XP

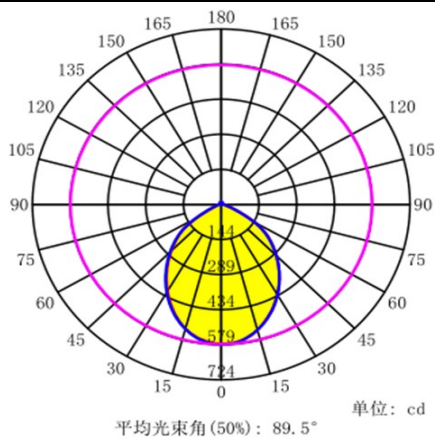


KB-HB28W-LW100-T5-XP

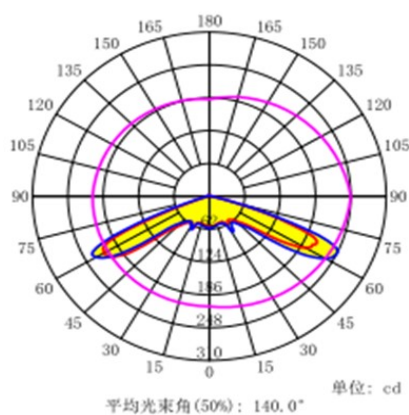


Light Distribution Curve (配光曲线图):


KB-SL28W-LW100-60*100-XP

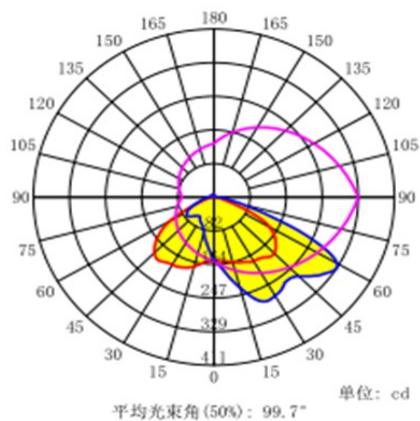


KB-SL28W-LW100-70*155-XP

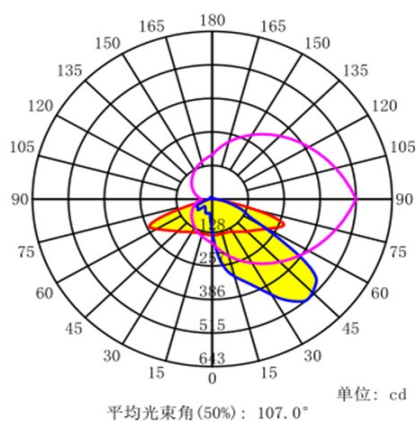

KB-SL28W-LW100-40*160-XP

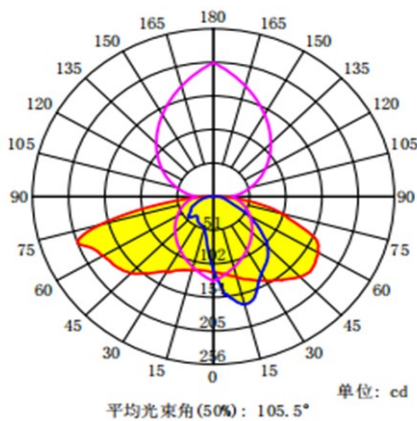

Mechanical Characteristics (产品尺寸):

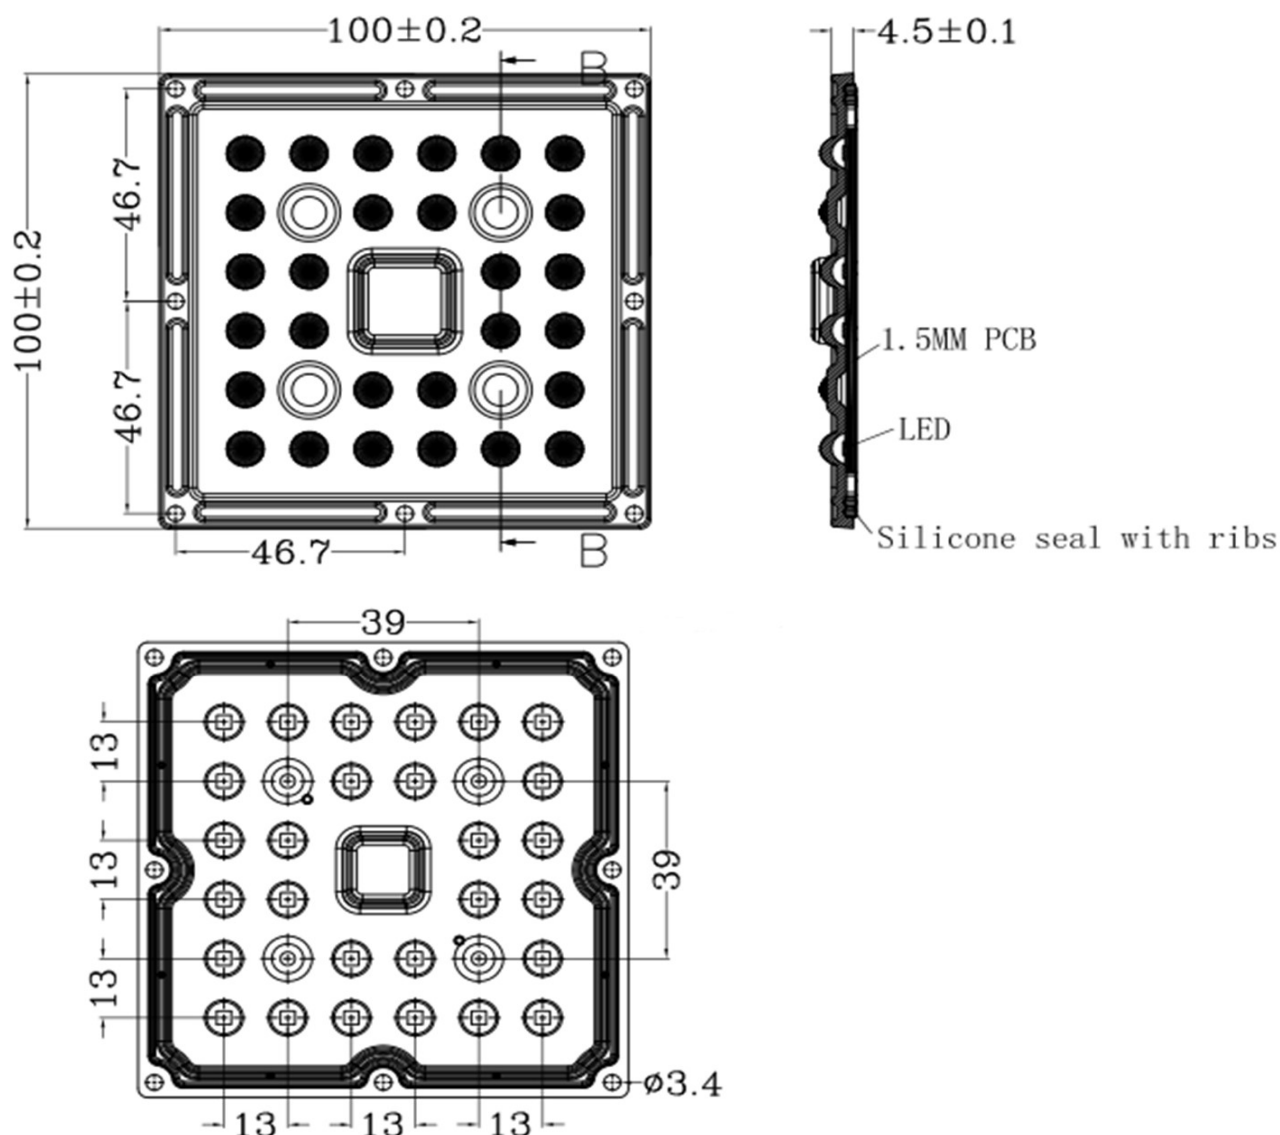

Packing Information (包装信息):



Lens: 300pcs/carton
Carton Size: 53*35*41CM
Gross weight: 18kg