



For reference only. See data sheet for the detailed specifications.

Technical Specification

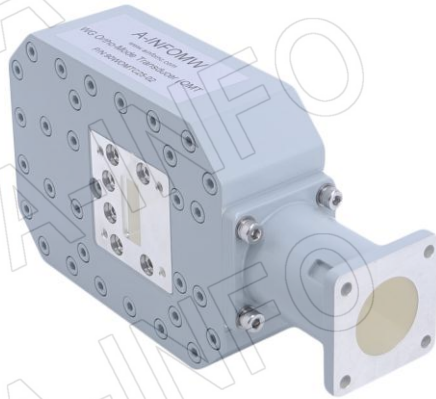

EIA WR	WR90
Frequency Range(GHz)	8.2 – 12.4
Bandwidth	Full
Common Port	25mm / 0.984" Circular WG
Insertion Loss(dB)	0.35 Max.
VSWR	1.30:1 Typ.
Cross Pol. Isolation(dB)	55 Typ.; 45 Min.
Port to Port Isolation(dB)	40 Min.
Common Port Flange	FBP100-M(UBR100-M)
Flange	FBP100(UBR100) (Modified with 4xM4 Deep 6)
Material	Al
Size(mm)	171.5 x 41.4 x 88.9
Net Weight(Kg)	1.15 Around

Outline Drawing (Size: mm)

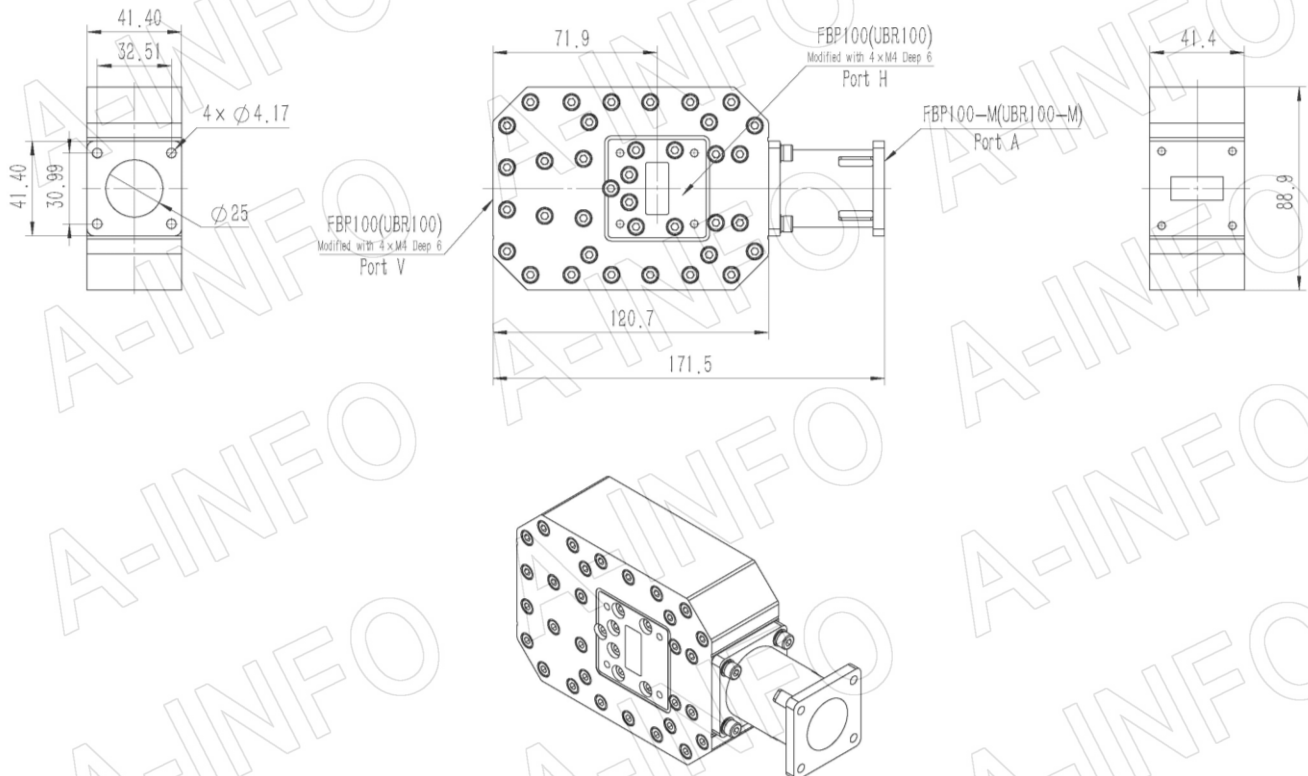

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


Page 1 of 5

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

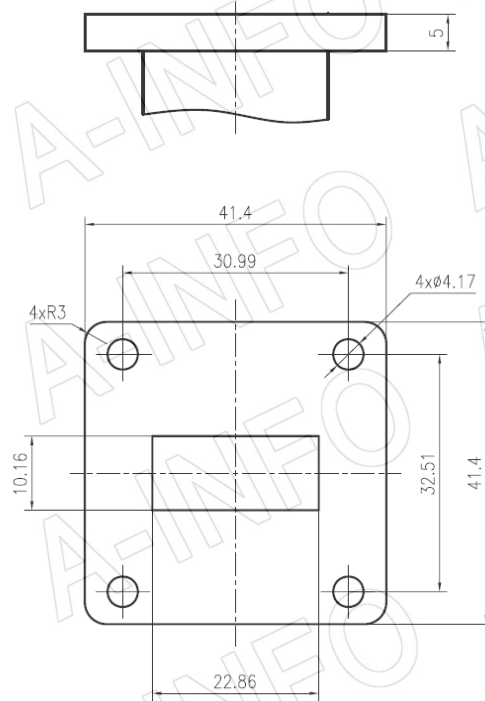

FBP100

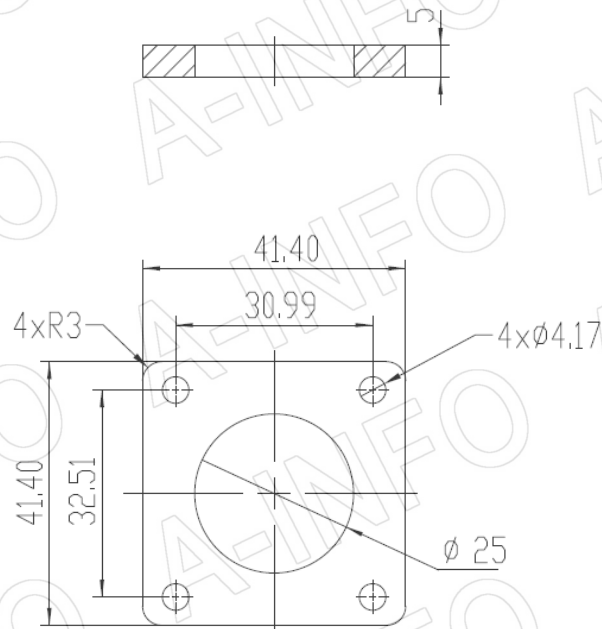

FBP100-M

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,


Page 2 of 5

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results


Port H_ Insertion Loss(Test with two OMT back to back)

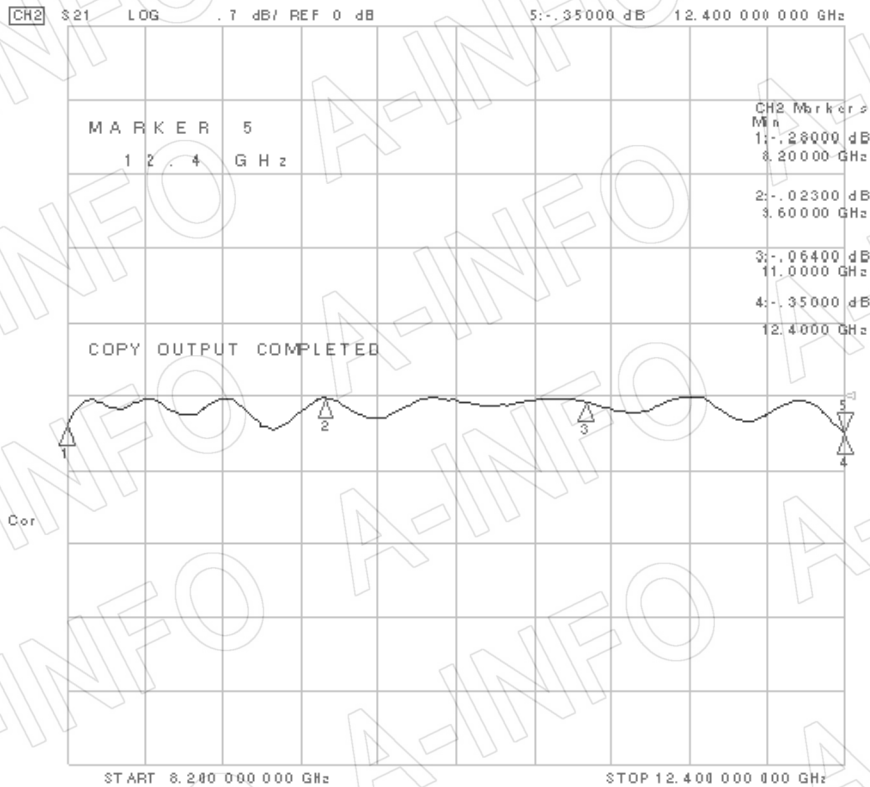


Port V_ Insertion Loss(Test with two OMT back to back)

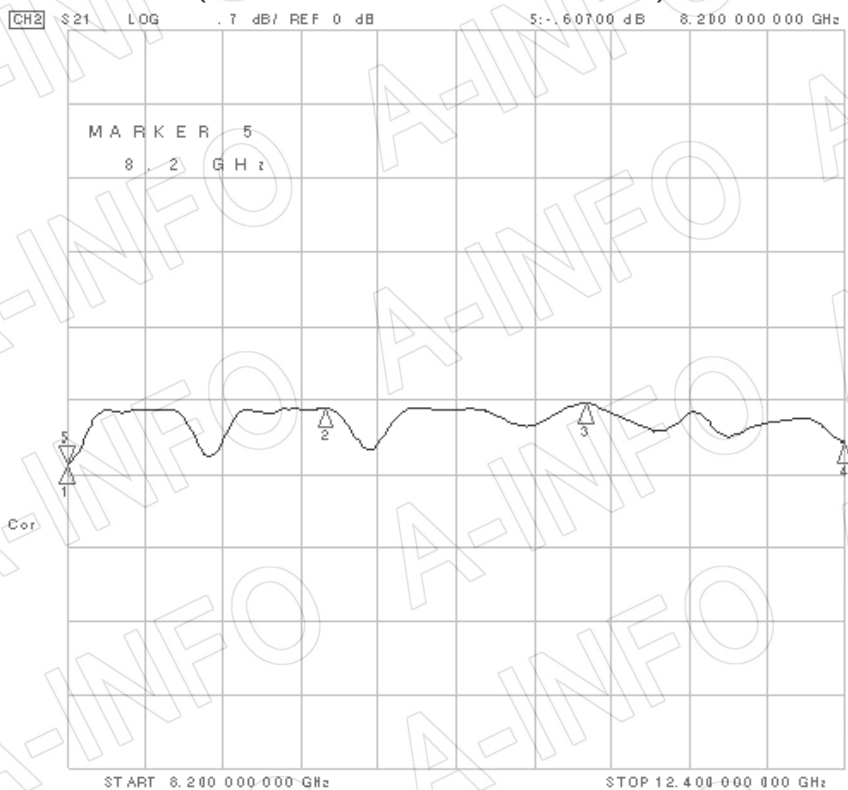


Port H_VSWR

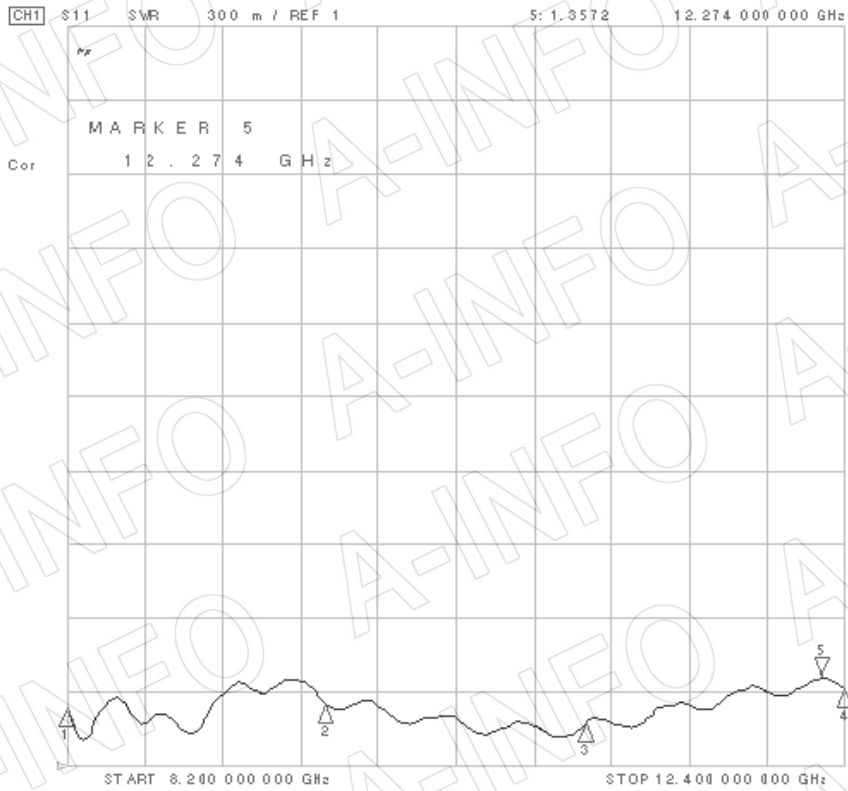

Port V_VSWR

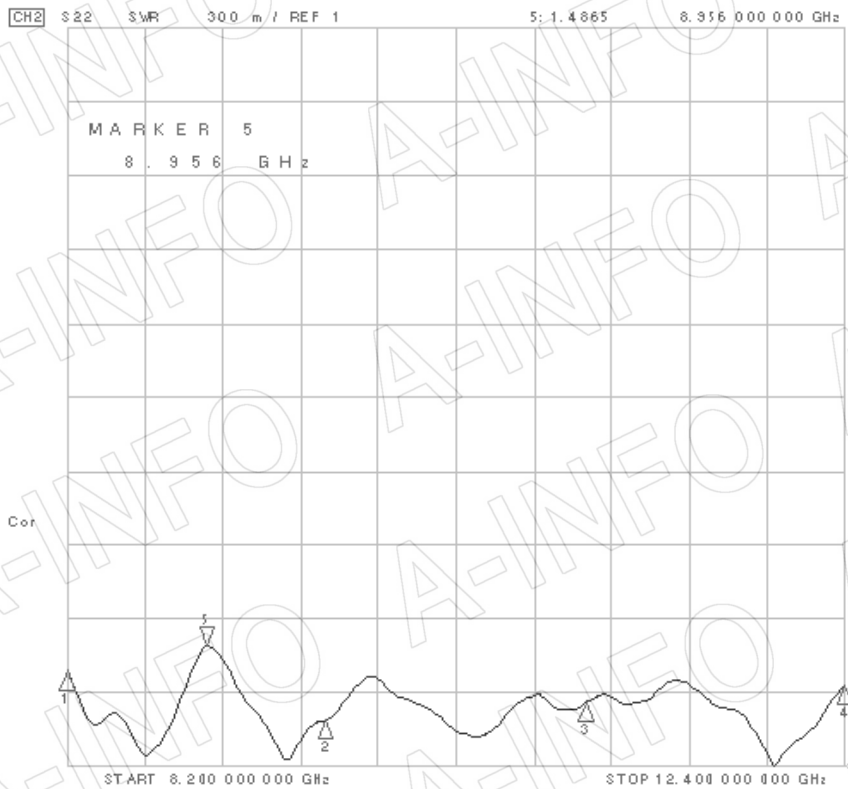

Cross Polarization Isolation

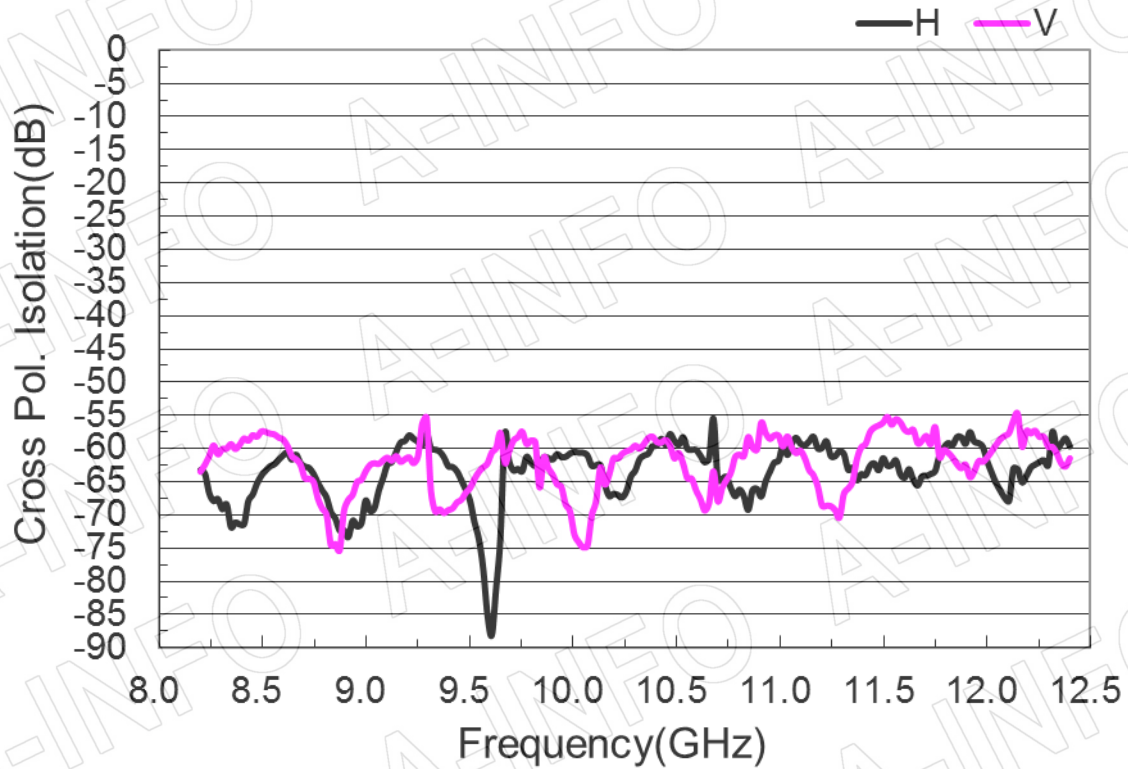

Port to Port Isolation

