
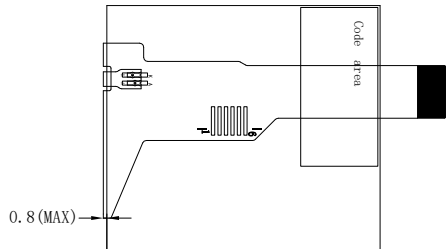
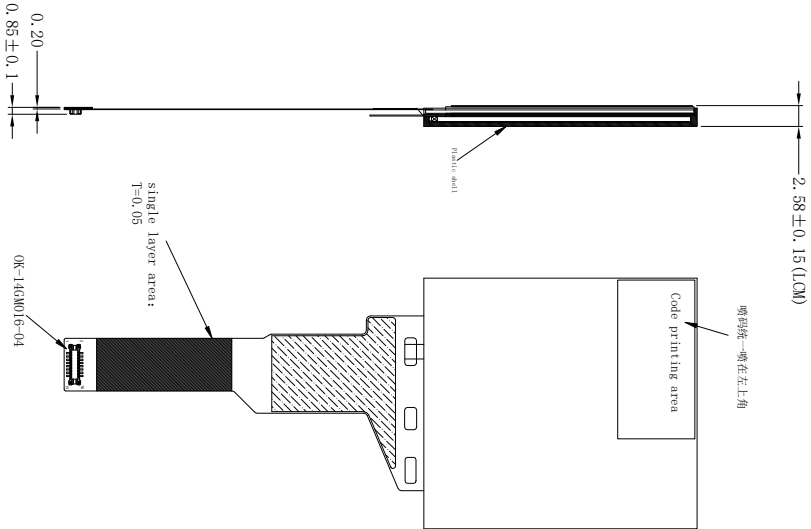


Front View

Side View


Back View

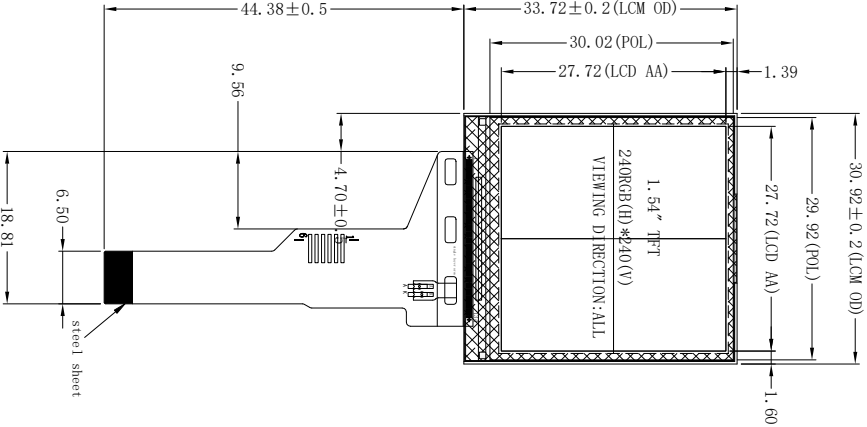

PIN	SYMBOL
1	LED-
2	LED+
3	GND
4	VCC2.8
5	TE
6	NRESET
7	CS
8	WRX
9	DCX
10	SDA
11	TP_GND
12	TP_INT
13	TP_RESET
14	TP_SCL1.8
15	TP_SDA1.8
16	TP_VDD2.8

Notes:

1. Display : 1.54"
2. Resolution : 240xRGBx240
3. View Direction: ALL
4. LCD Driver: ST7789T3
5. LCM Brightness:350cd/m² (TYP)
6. *:Critical dimension () : Reference dimension:
7. **GENERAL TOLERANCE : ±0.2mm**
8. OPERATING TEMP: -10° C ~ +60° C
9. STORAGE TEMP: -20° C ~ +70° C
10. Requirements on Environmental Protection: ROHS



LEADTEK COMPANY LIMITED

REV	DESCRIPTION	DATE	NAME
3			
2			
1	NEW	2022.08.23	Ian

IB > AOBH #RPM I > V			
SCALE: 1/1 UNIT: mm			
Part No:	LTK015QVHLM04	VER: V1	Approve
Customer No:			Check
			Drawn
			Ian