


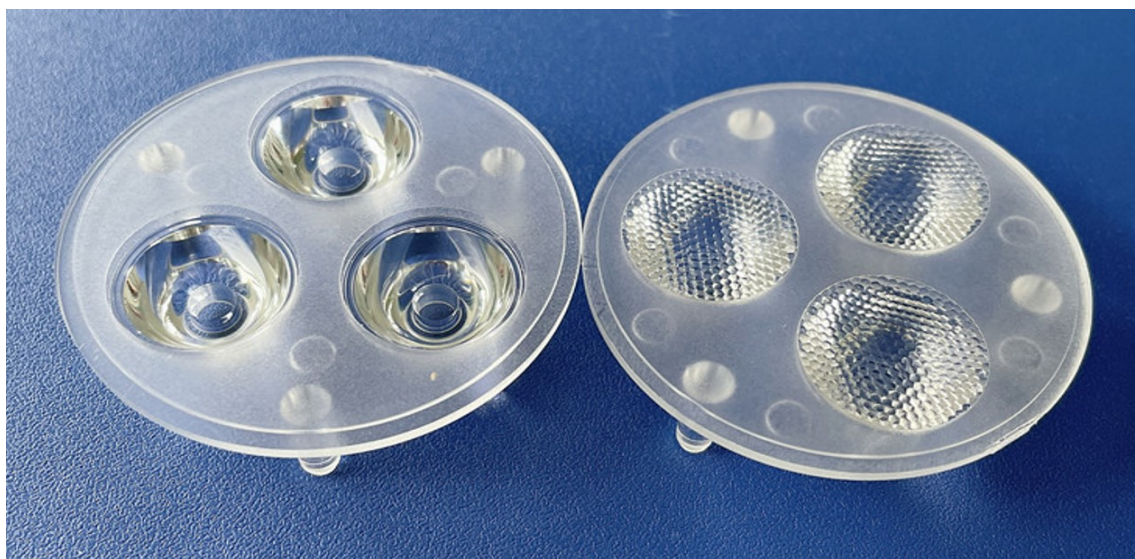

Product Parameters (产品描述)

出光角度 | Beam Angle: 10~60°
产品材料 | Material: PMMA
工作温度 | Work Temp: <85°C

支架颜色 | Holder Color: N/A
透光率 | Transmittance: 93%
匹配LED | Match Led: 3535 Leds/3030 Leds


Part Number	Lens Surface	Dimension	Beam Angle
KB-P50-10-3-XP	transparent	Φ50.0*H13.1mm	~10°
KB-P50-15-3-XP	transparent	Φ50.0*H13.1mm	~15°
KB-P50-20-3-XP	transparent	Φ50.0*H13.1mm	~20°
KB-P50-25-3-XP	transparent	Φ50.0*H13.1mm	~25°
KB-P50-30-3-XP	transparent	Φ50.0*H13.1mm	~30°
KB-P50-45-3-XP	transparent	Φ50.0*H13.1mm	~45°
KB-P50-60-3-XP	transparent	Φ50.0*H13.1mm	~60°
KB-P50-10P-3-XP	beads	Φ50.0*H13.1mm	~10°
KB-P50-15P-3-XP	beads	Φ50.0*H13.1mm	~15°
KB-P50-20P-3-XP	beads	Φ50.0*H13.1mm	~20°
KB-P50-25P-3-XP	beads	Φ50.0*H13.1mm	~25°
KB-P50-30P-3-XP	beads	Φ50.0*H13.1mm	~30°
KB-P50-45P-3-XP	beads	Φ50.0*H13.1mm	~45°
KB-P50-60P-3-XP	beads	Φ50.0*H13.1mm	~60°

Direction for Use

(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40°C , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Mechanical Characteristics (产品尺寸):

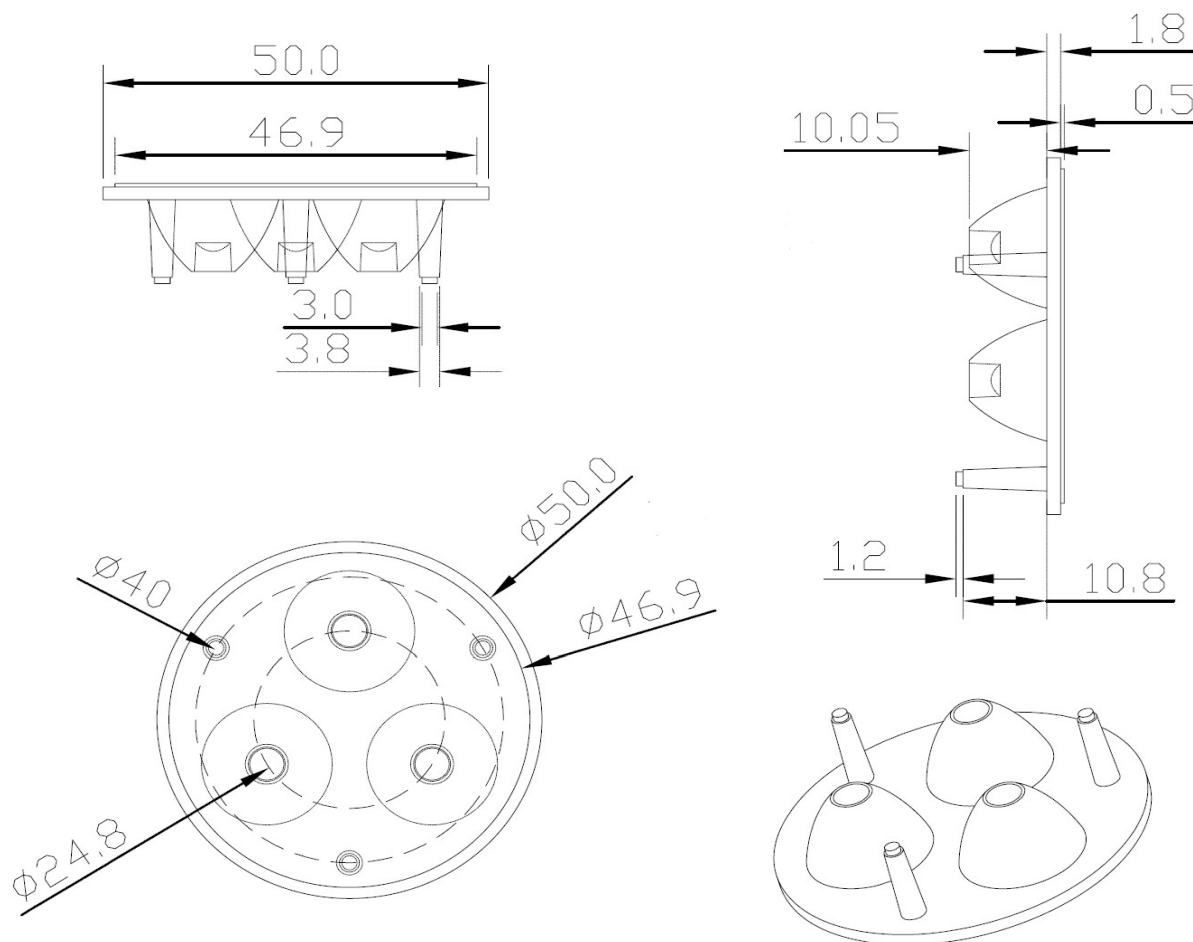

Product Package (产品包装):

Inner Box (内盒)	Outer Carton (外箱)
	
36pcs/box Gross weight: 0.5kg/box Box dimension: 13*13*13cm	34boxes/carton 1,224pcs/carton Gross weight: 18kg/CTN Carton Dimension: 64*28*32cm