

CABLINE®-CBL

Low mating height (Height = 0.825 mm), Mechanical lock with shielding and multi-point ground, 0.4 mm pitch, Horizontal mating type Micro-coaxial connector

Product Specifications:

Mating type		Horizontal
Board Pitch (mm)		0.4
Wiping Length (mm)		0.44
Mated size (mm)	Height	0.825 +/- 0.15
	Width	Formula: 6.44 + (0.4*?p)
	Depth	5.44
Pin Counts	Range	Up to 40
	Available	30, 40

Applicable Cable Size:

Maximum O.D. (mm)	0.4
Micro-Coaxial for Signal (AWG)	45 ohm: #40 or smaller wire 50 ohm: #40 or smaller wire
Twin Coaxial (AWG)	-
Discrete (AWG)	#36 or smaller wire

Applicable Standards (Reference Only):


USB 3.1 Gen 1 (5 Gbps)	V-By-One HS 1.4 (4 Gbps)
HDMI 1.3 (3.4 Gbps)	


*Please inquire for pin counts not listed or outside of the pin count range.

*Lower height connector CABLINE-CAL (mating height: 0.8 mm max.) is also available.




▶ Mating height: 0.975 mm max. (0.825 mm nominal)

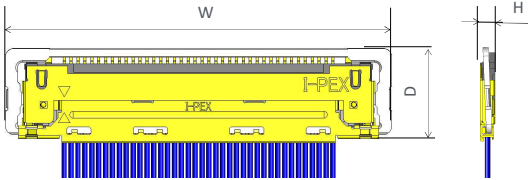CABLINE-CBL 40p		
		
CABLINE-CBL 40p mated set dimensions (mm)		
W	D	H
22.44	5.44	0.825 (0.975 max.)

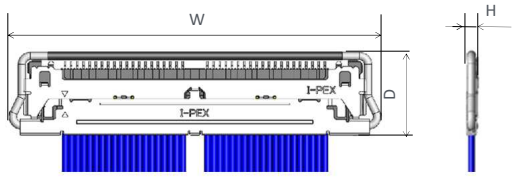
CABLINE-CAL 40p (lower height connector)		
		
CABLINE-CAL 40p mated set dimensions (mm)		
W	D	H
24.05	5.50	0.70 (0.80 max.)

▶ Mechanical locking bar prevents incomplete mating and back-out/un-mating

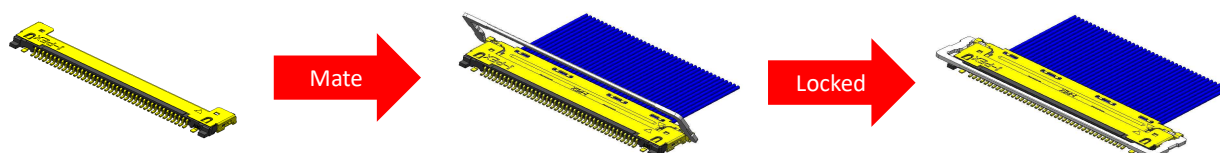

Mechanical locking bar only locks when plug is fully mated to receptacle.

Interference

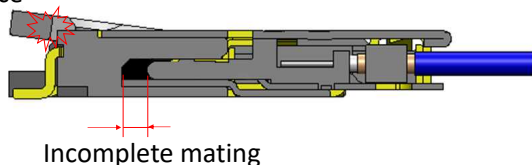


Incomplete mating





Complete mating

▶ EMI shielding and multi-point ground design

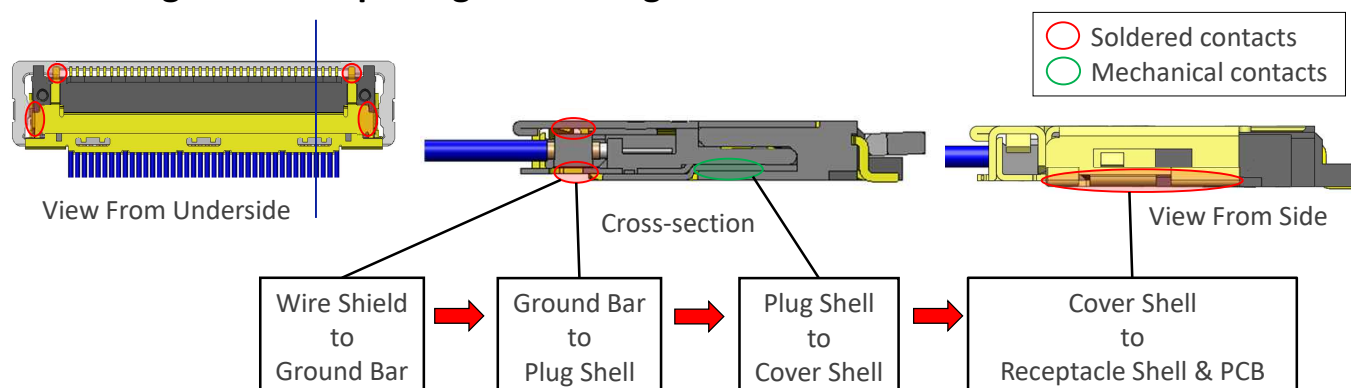

Component Parts Details


Component Parts

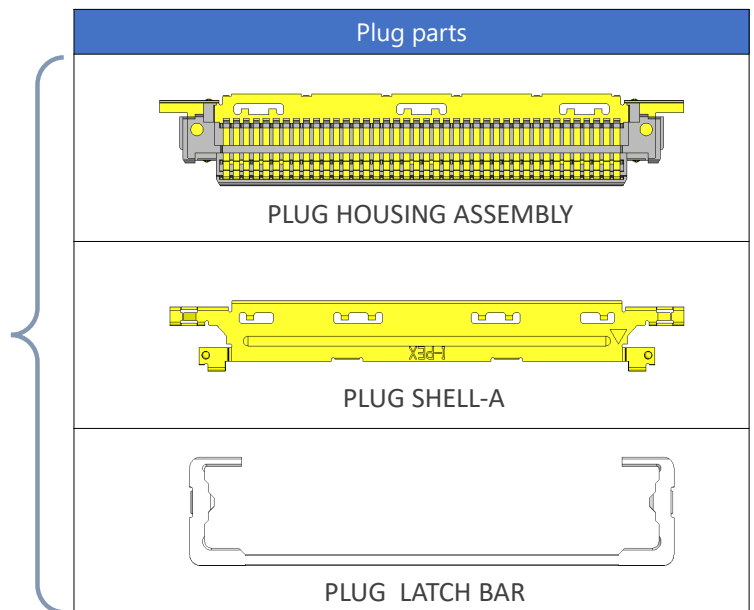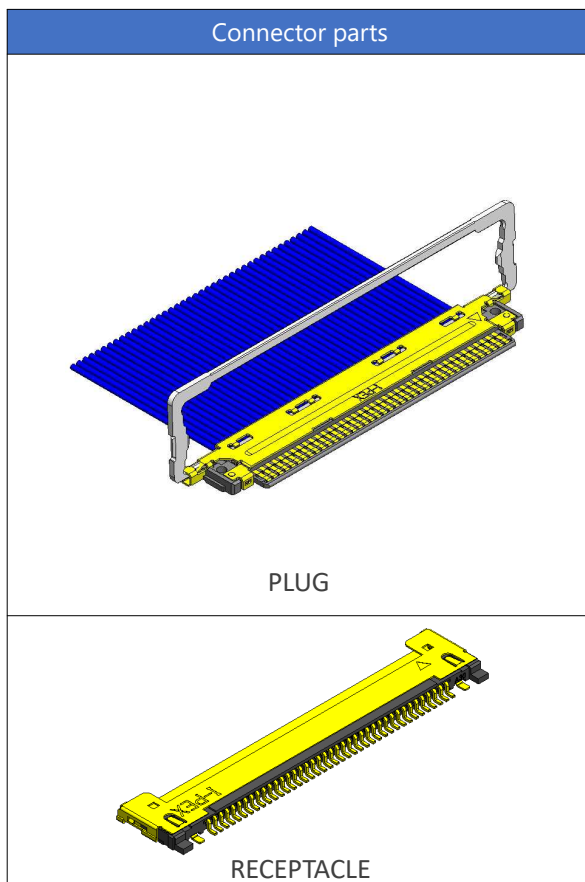

Plug for Cable Assembly

Recommended P/N		20472-0**T-10				
PART NO.	POS.	A	B	C	D	
20472-030T-10	30	11.60	12.40	18.44	13.00	
20472-040T-10	40	15.60	16.40	22.44	17.00	


P/N : 20472-***T-10

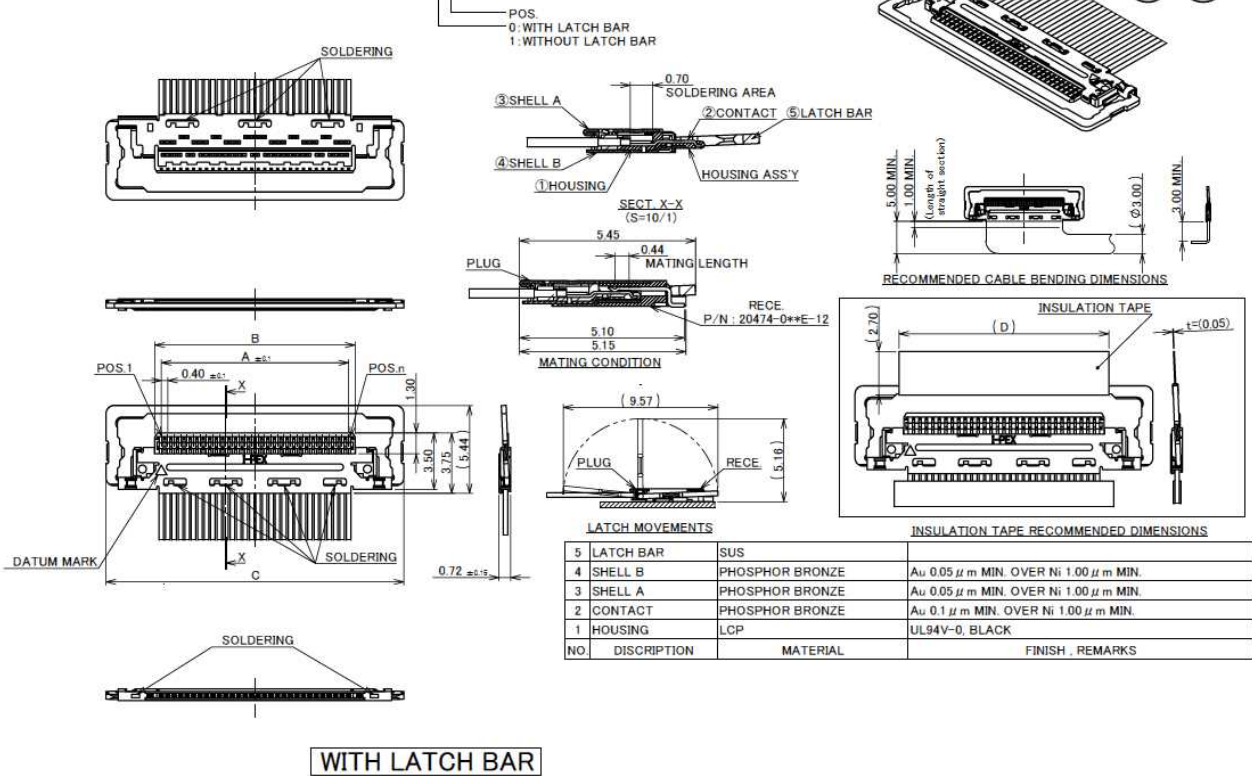

Rev.11

Recommended P/N		20472-0**T-10				
PART NO.	POS.	A	B	E		
20472-130T-10	30	11.60	12.40	16.94		
20472-140T-10	40	15.60	16.40	20.94		



P/N : 20472-***T-10

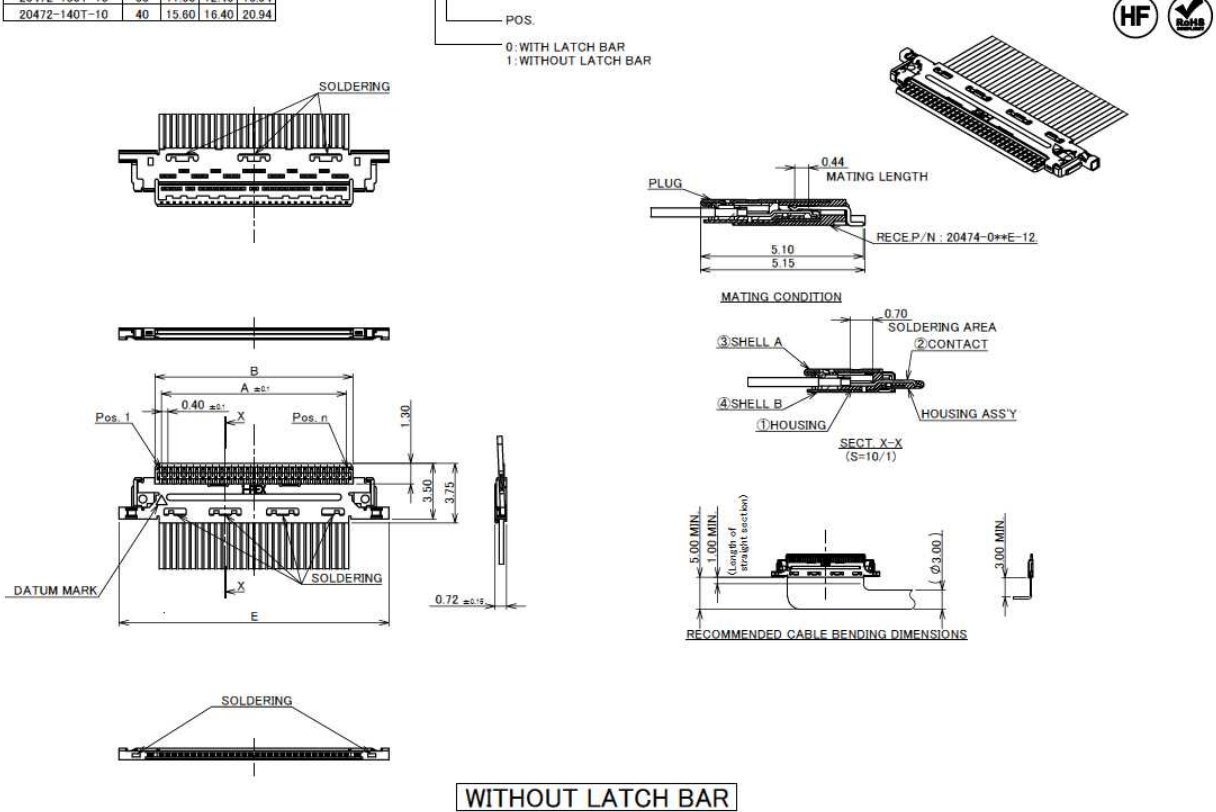

Rev.11

Plug for Cable Assembly







PART NO.	POS.	A
20472-#30T-10	30	11.60
20472-#40T-10	40	15.60

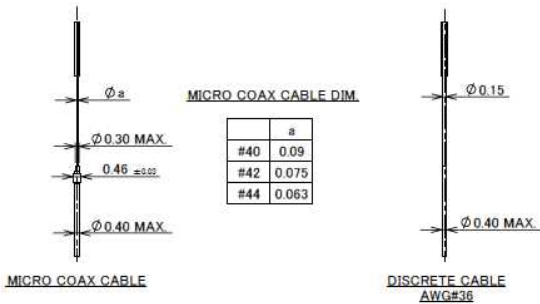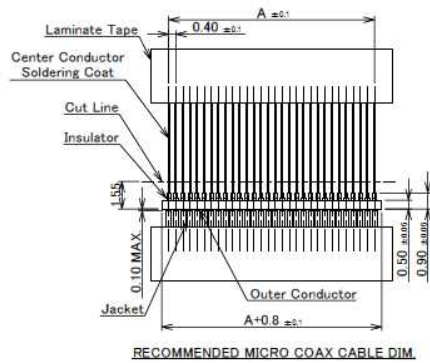

Rev.11

Plug Housing Assembly

Recommended P/N		20473-0**T-10									
PART NO.	POS.	A	B	C	D	E	F	G	H	J	
20473-030T-10	30	11.60	12.40	12.65	15.08	12.65	16.94	15.34	9.00	11.88	
20473-040T-10	40	15.60	16.40	16.65	19.08	16.65	20.94	19.34	13.00	15.88	

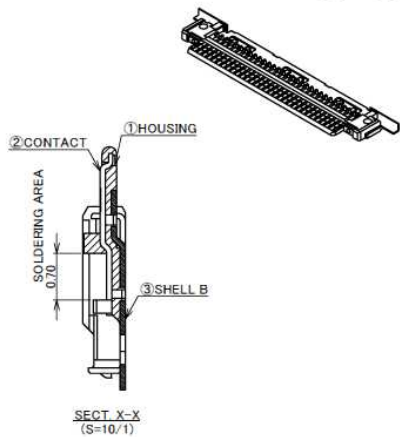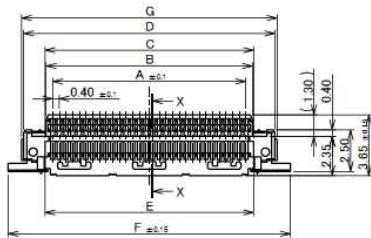

NOTES
1. THIS PART IS ASSEMBLED WITH SHELL A(P/N 2618-0**1)
AND LATCH BAR(P/N 2619-***0) AFTER SOLDERED THE CABLE.
AND IT BECOMES P/N 20472-0**T-10


3	SHELL B	PHOSPHOR BRONZE	Au 0.05 μ m MIN. OVER Ni 1.00 μ m MIN.
2	CONTACT	PHOSPHOR BRONZE	Au 0.1 μ m MIN. OVER Ni 1.00 μ m MIN.
1	HOUSING	LCP	UL94V-0, BLACK
NO	DISCRIPTION	MATERIAL	FINISH , REMARKS

Rev.6

Plug Shell-A

Recommended P/N		2618-0**1		
PART NO.	POS.	A	B	C
2618-0301	30	16.94	3.60	11.88
2618-0401	40	20.94	5.60	15.88

P/N:2618-0**1
POS.

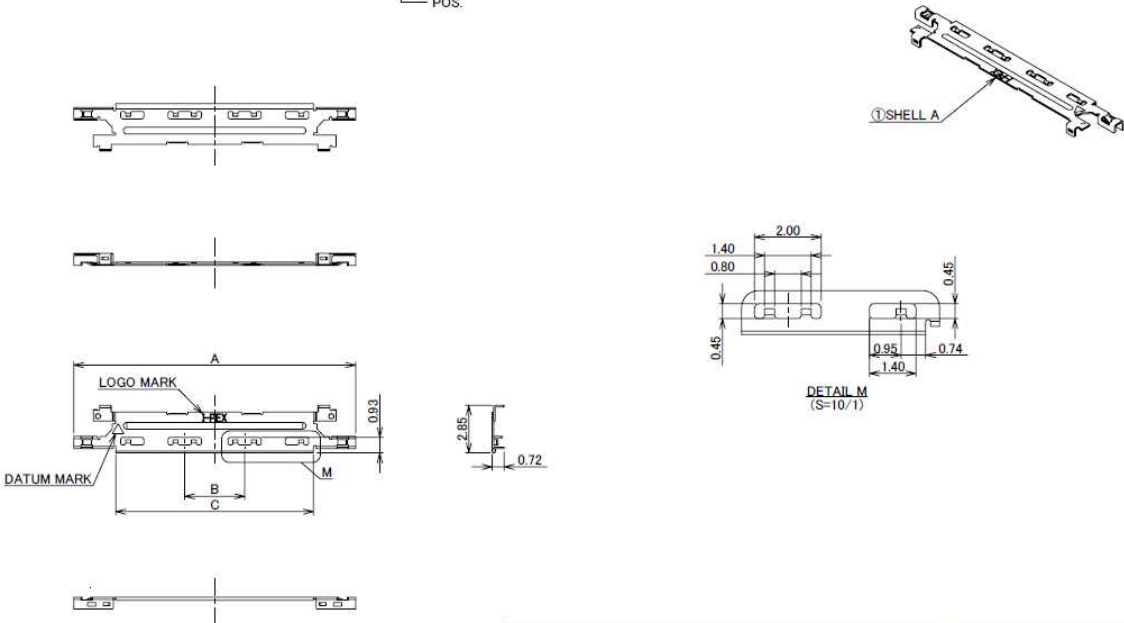


1	SHELL A	PHOSPHOR BRONZE	Au 0.05 μ m MIN. OVER Ni 1.00 μ m MIN.
NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS

Rev.5

Plug Latch Bar

Recommended P/N		2619-0**0	
PART NO.	POS.	A	B
2619-0300	30	15.44	13.00
2619-0400	40	22.44	17.00

2619-0**0
POS.









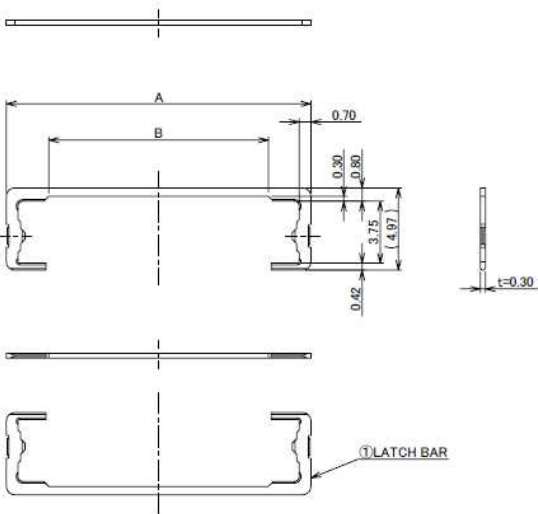


1	LATCH BAR	SUS	-
NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS

Rev.7

Receptacle Assembly




Recommended P/N		20474-0**E-12				
PART NO.	POS.	A	B	C	G	
20474-030E-12	30	11.60	13.40	16.50	18.44	
20474-040E-12	40	15.60	17.40	20.50	22.44	

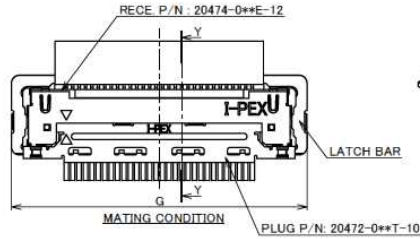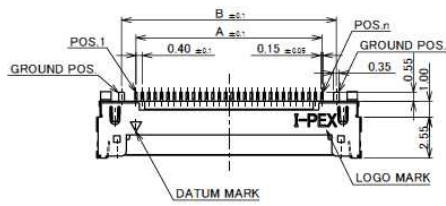

NO.	DISCRIPTION	MATERIAL	FINISH, REMARKS
3	SHELL	PHOSPHOR BRONZE	Au 0.05 μ m MIN. OVER Ni 1.00 μ m MIN.
2	CONTACT	PHOSPHOR BRONZE	CONTACT AREA: Au 0.1 μ m MIN. OVER Ni 1.00 μ m MIN. SOLDERING AREA: Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN.
1	HOUSING	LCP	UL94V-0, BLACK

Rev.12



PART NO.	POS.	A	B	E	F	H	J	K
20474-030E-12	30	11.60	13.40	16.18	12.59	17.20	19.20	12.20
20474-040E-12	40	15.60	17.40	20.18	16.59	21.20	23.20	16.20

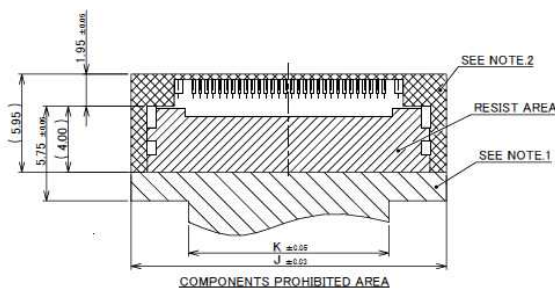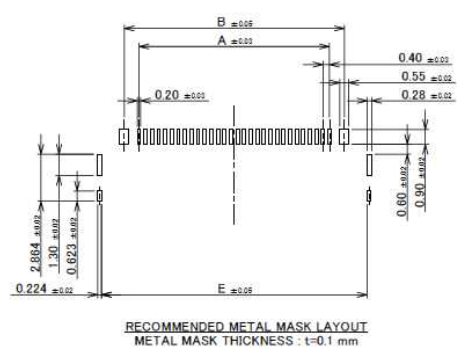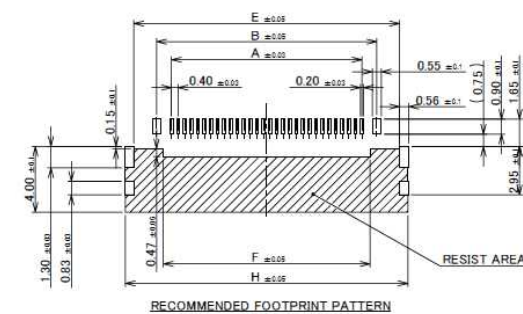

- NOTES.
1. THIS AREA CANNOT MOUNT ANOTHER COMPONENTS.
 2. IN CASE OF PLUG WITH LATCH BAR(20472-0**T-10), THIS AREA CANNOT MOUNT ANOTHER COMPONENTS.

Rev.12

Receptacle Assembly

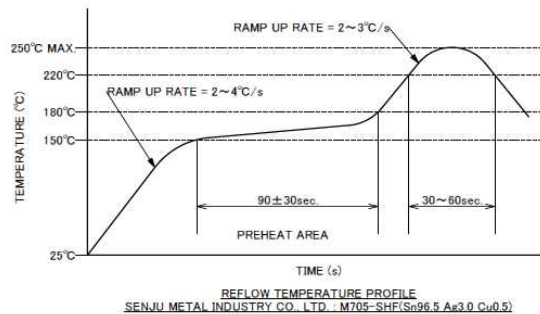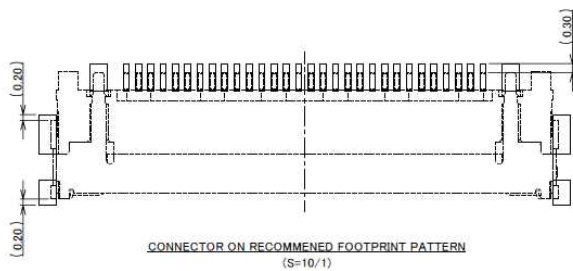

Rev.12

ITEMS	SPECIFICATION
APPLICABLE CABLE	MICRO COAX : AWG# 40, 42, 44 DISCRETE : AWG# 36
RATING VOLTAGE	100V AC (PER A CONTACT)
RATING AMPERAGE (FOR CONTACT)	0.1A AC/DC [AWG#44] 0.24A AC/DC [AWG#42] 0.3A AC/DC [AWG#40] 0.8A AC/DC [AWG#36]
OPERATING TEMPERATURE	233~358K(-40°C~+85°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE	INITIAL : 275mohm MAX. (AWG#36) / AFTER TEST : \angle 40mohm MAX. 600mohm MAX. (AWG#40) 700mohm MAX. (AWG#42) 1080mohm MAX. (AWG#44)
GROUND SHELL RESISTANCE	INITIAL : 50mohm MAX. / AFTER TEST : \angle 40mohm MAX.
INSULATION RESISTANCE	INITIAL : 1000Mohm MIN. / AFTER TEST : 500Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	30 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	30P : 10N MAX. 40P : 12N MAX.
UNMATING FORCE (INITIAL / AFTER TEST)	30P : 3.0N MIN. 40P : 4.0N MIN.
CABLE RETENTION FORCE	30P : 14.70N MIN. 40P : 19.60N MIN.
PRODUCT SPECIFICATION	PRS-1421
TEST REPORT	TR-08030
INSTRUCTION MANUAL	HIM-09002
ASSEMBLY MANUAL	ASM-09002
APPEARANCE CRITERIA No.	QLS-A***

Rev.12


Board to
Board



High-Density



Autolocking
FPC/FFC



High-Density



FPC/FFC



Micro-Coaxial
/ Discrete Cable



High-Speed



RF



High-Frequency



Optical
Module



High-Speed



Power



High-Power



I/O
(Input/Output)



Quick charge



Effector



Custom
Connectors
Available

Inquiry



I-PEX, MHF, CABLINE, NOVASTACK, EVAFLEX, MINIFLEX, ISH, IARPB, IASLP, ESTORQ, ISFIT, i-Fit and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative
or more detailed information.

www.i-pex.com



I-PEX

© I-PEX Inc. 2022
All rights reserved.