

REV.	SPECIFICATION	ECN NO.	APPD.
R2			

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 2 AMP.






Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 20m Ω max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

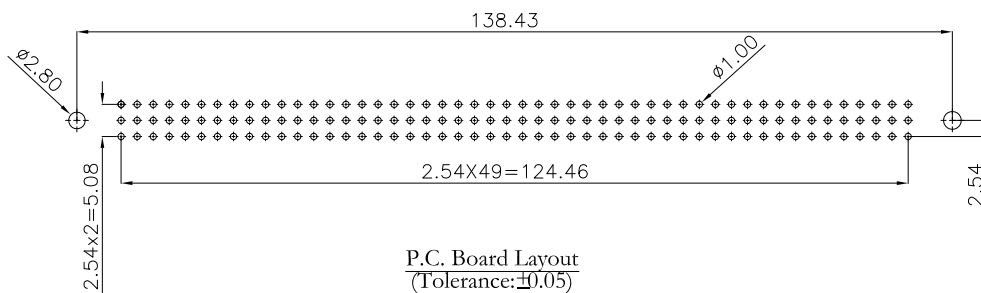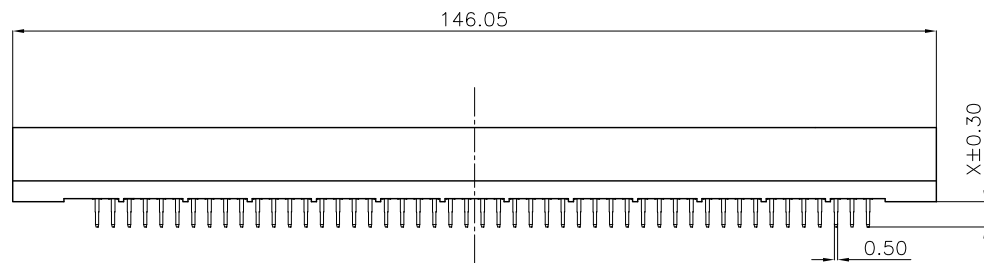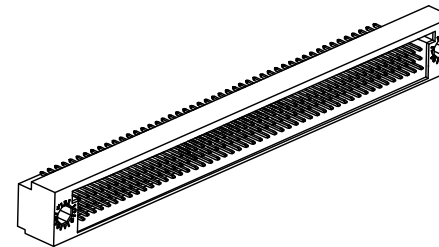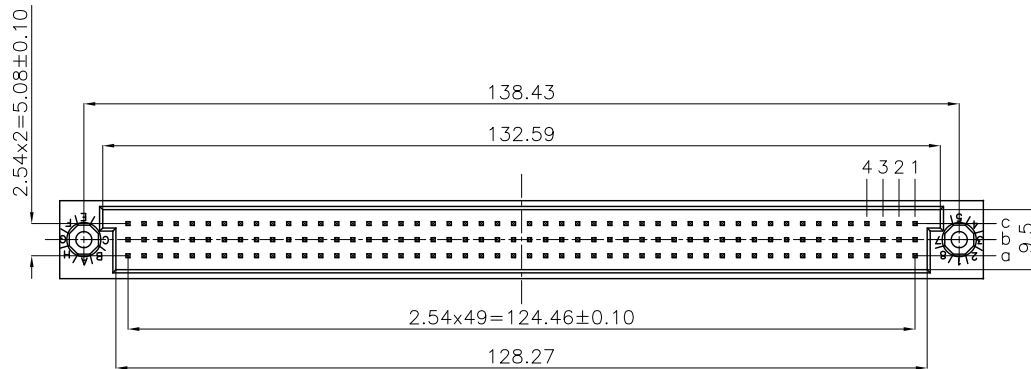

9001-1 3 150 x C xx A
 Series 1: 2.54mm 3: Male Position 1: Dip Length 2: Dip Length
 C: Dip Tin Contact Gold
 A: Tray Package
 00: G/F
 10: 10u"
 15: 15u"
 30: 30u"

X Length	1	2
	4.00	2.50

Tolerances	Drawn No.	9001D13087
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Xue 02/18'11

Title: 9001 Series
DIN41612 R Type
150P Male

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-13150xCxxA			
SHEET	1/1	Ver. No.	R2