

# MHF® III

Low-profile design (mated height = 1.6 mm max.), supports up to 6 GHz

Product Specifications:

Mated Height (mm max.)	1.6	
Rece. SMT Size (mm)	2.0 x 2.0	
Applicable Frequency	DC ~ 6 GHz	
Characteristic Impedance	50 ohm	
VSWR (L=100 mm)	DC~3 GHz	1.3 max.
	3~6 GHz	1.5 max.

\* Please inquire for pin counts not listed or outside of the pin count range.

Applicable Cable Size:



O.D. 0.81 mm / AWG 36
O.D. 0.64 mm / AWG 36

Applicable Standards (Reference Only):


5G sub-6, Wi-Fi 6, LTE/LTE-Advanced, LPWA, Bluetooth, GPS
---



Small form factor with big performance through 6 GHz

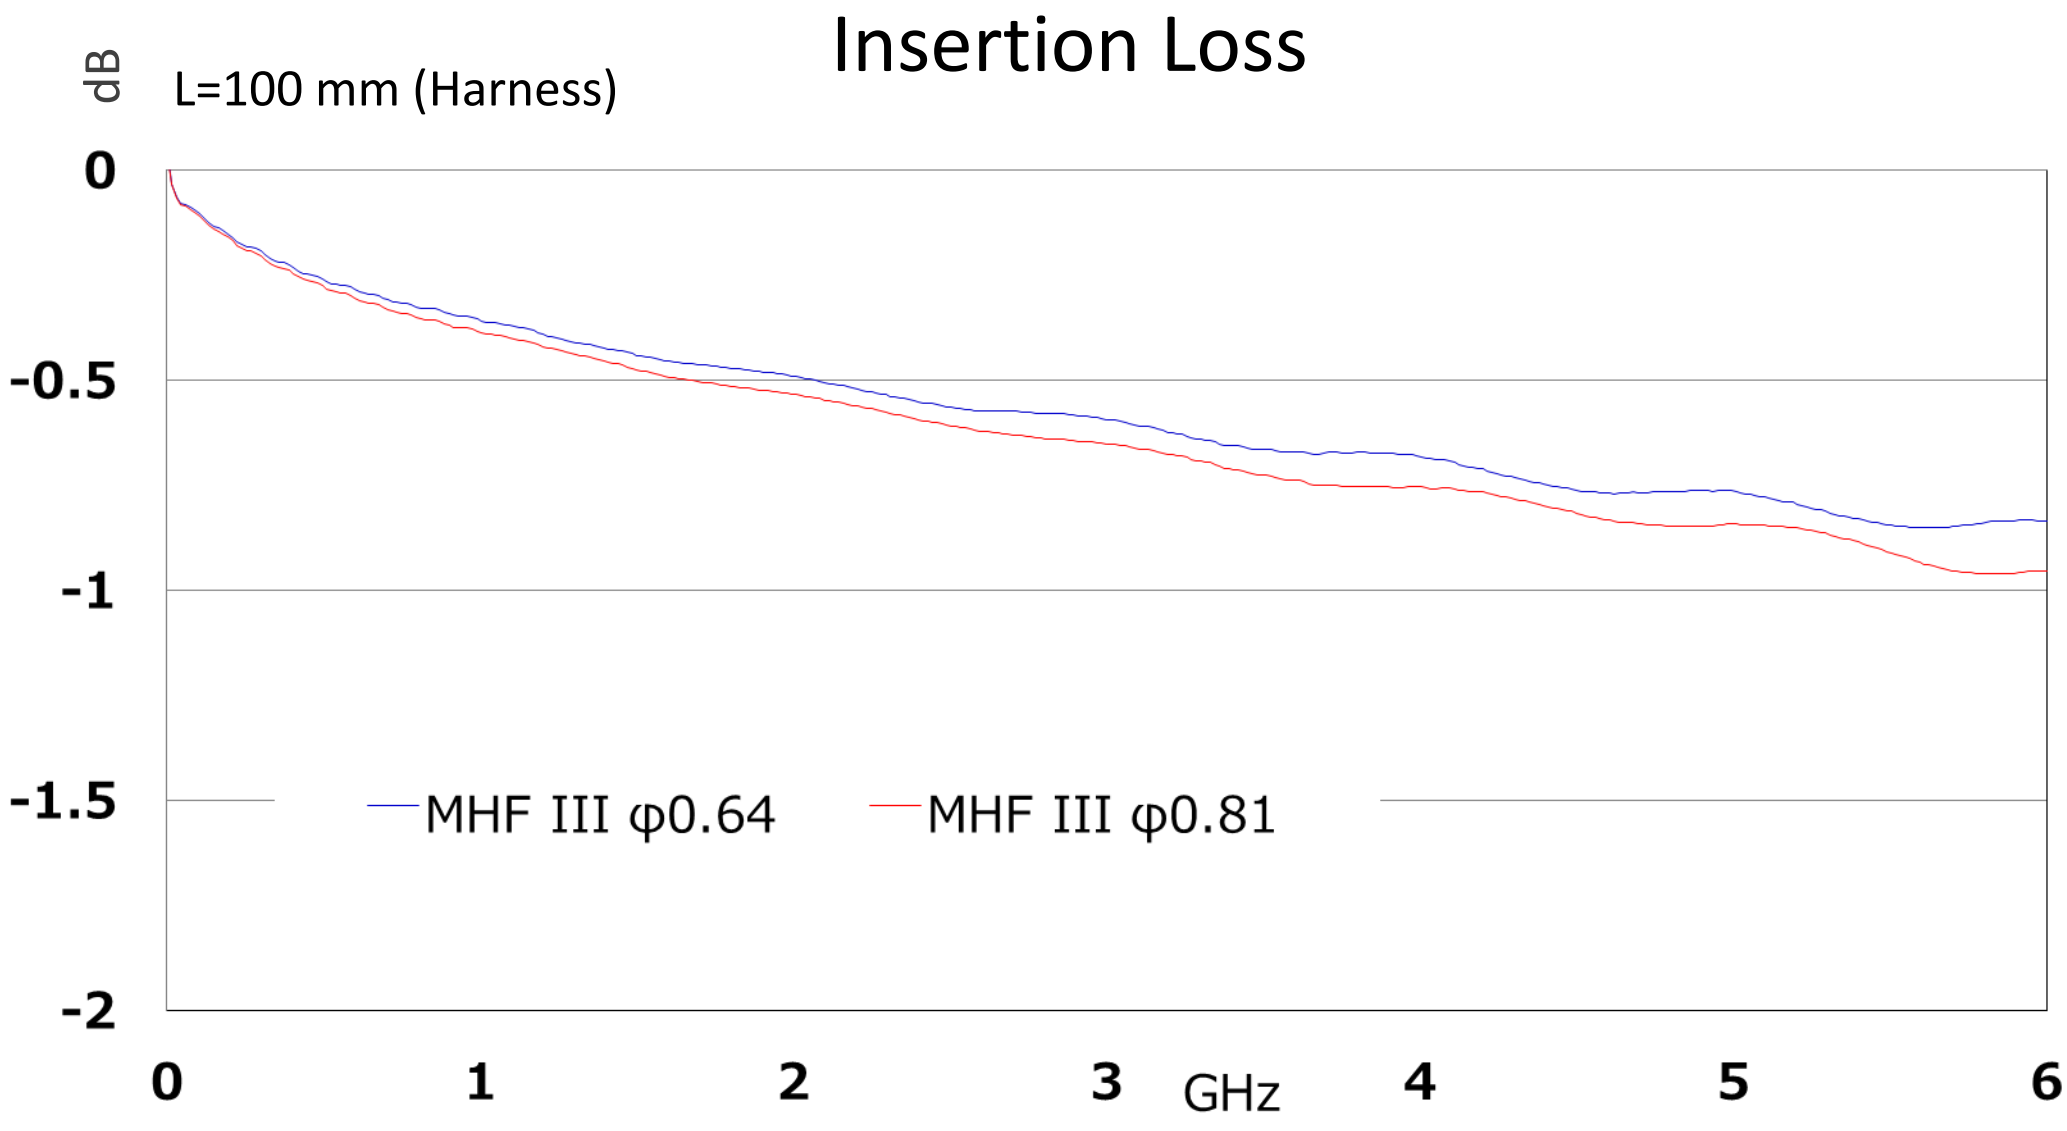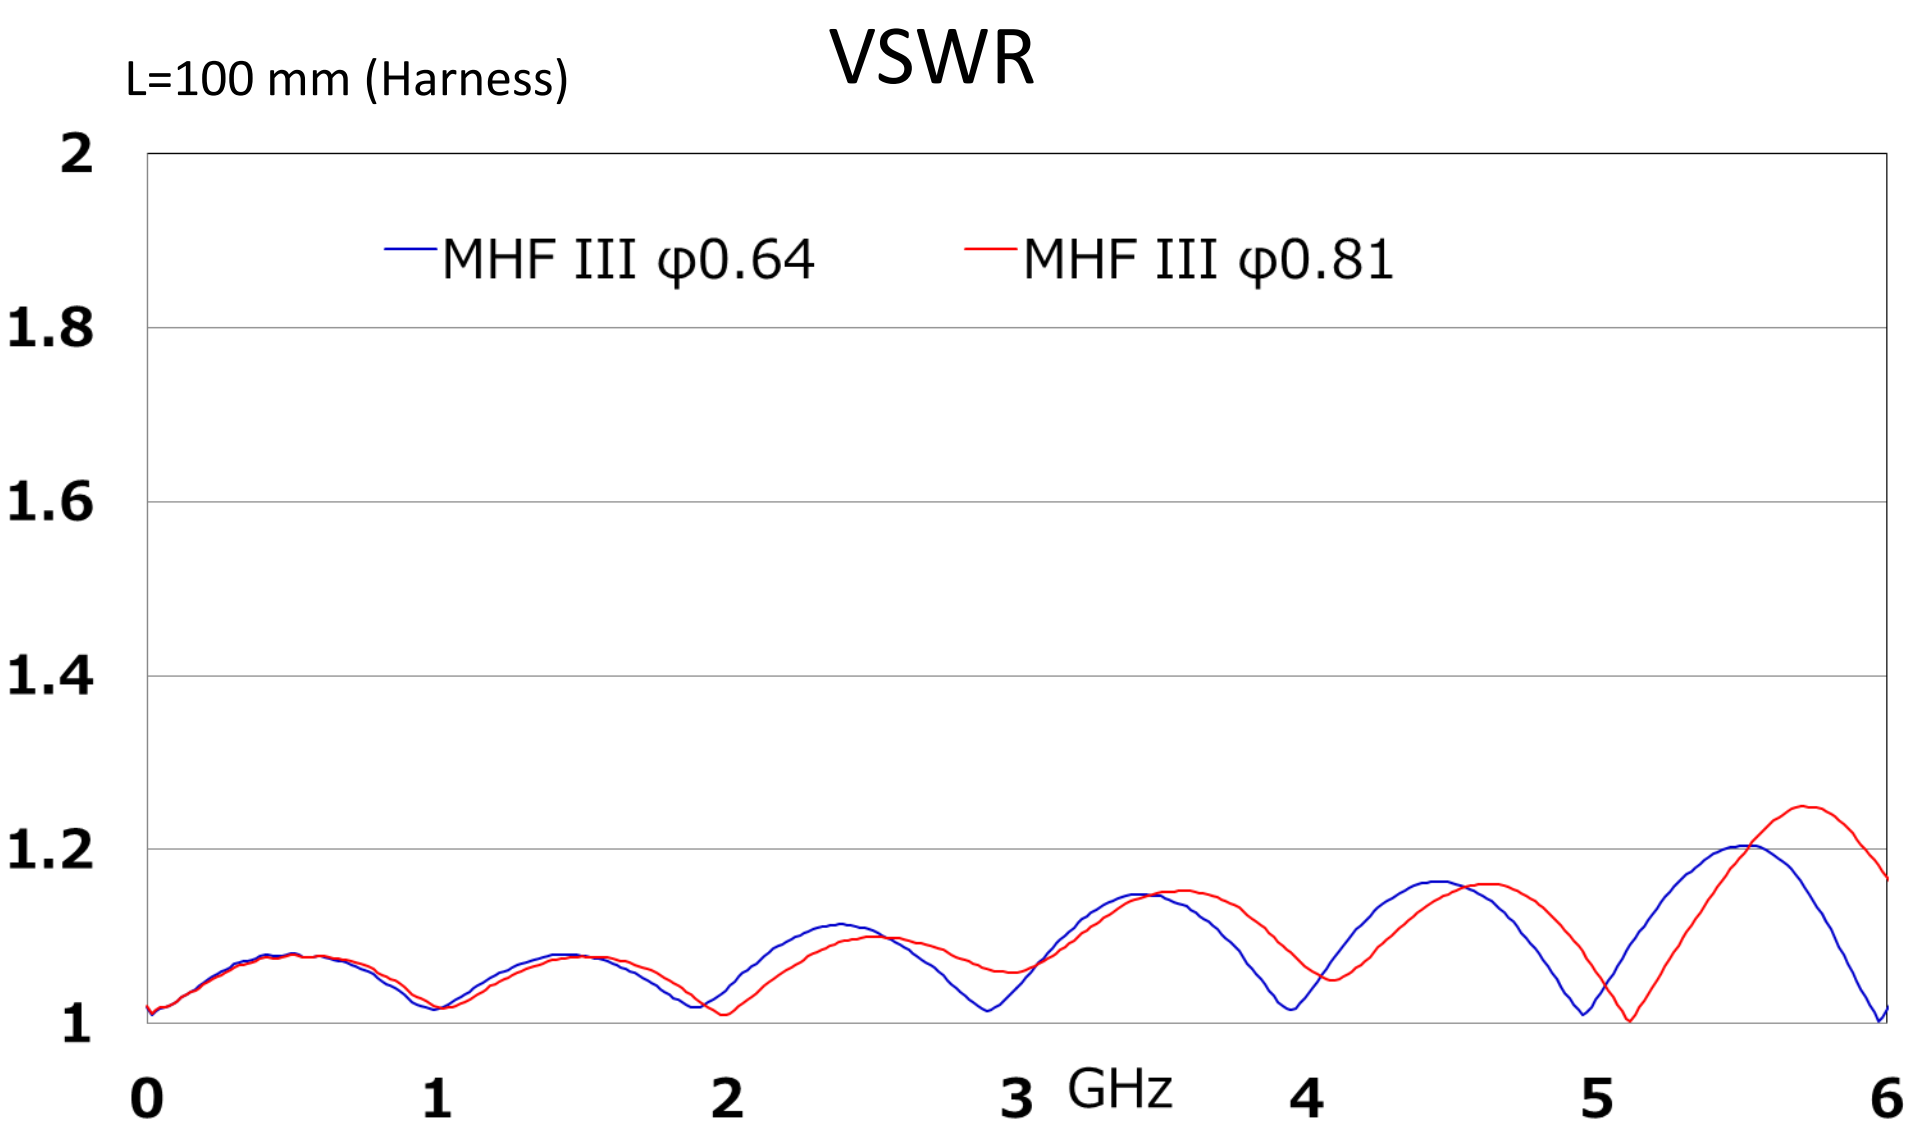

Solderless micro-coax termination technology "i-Fit®" provides consistent performance

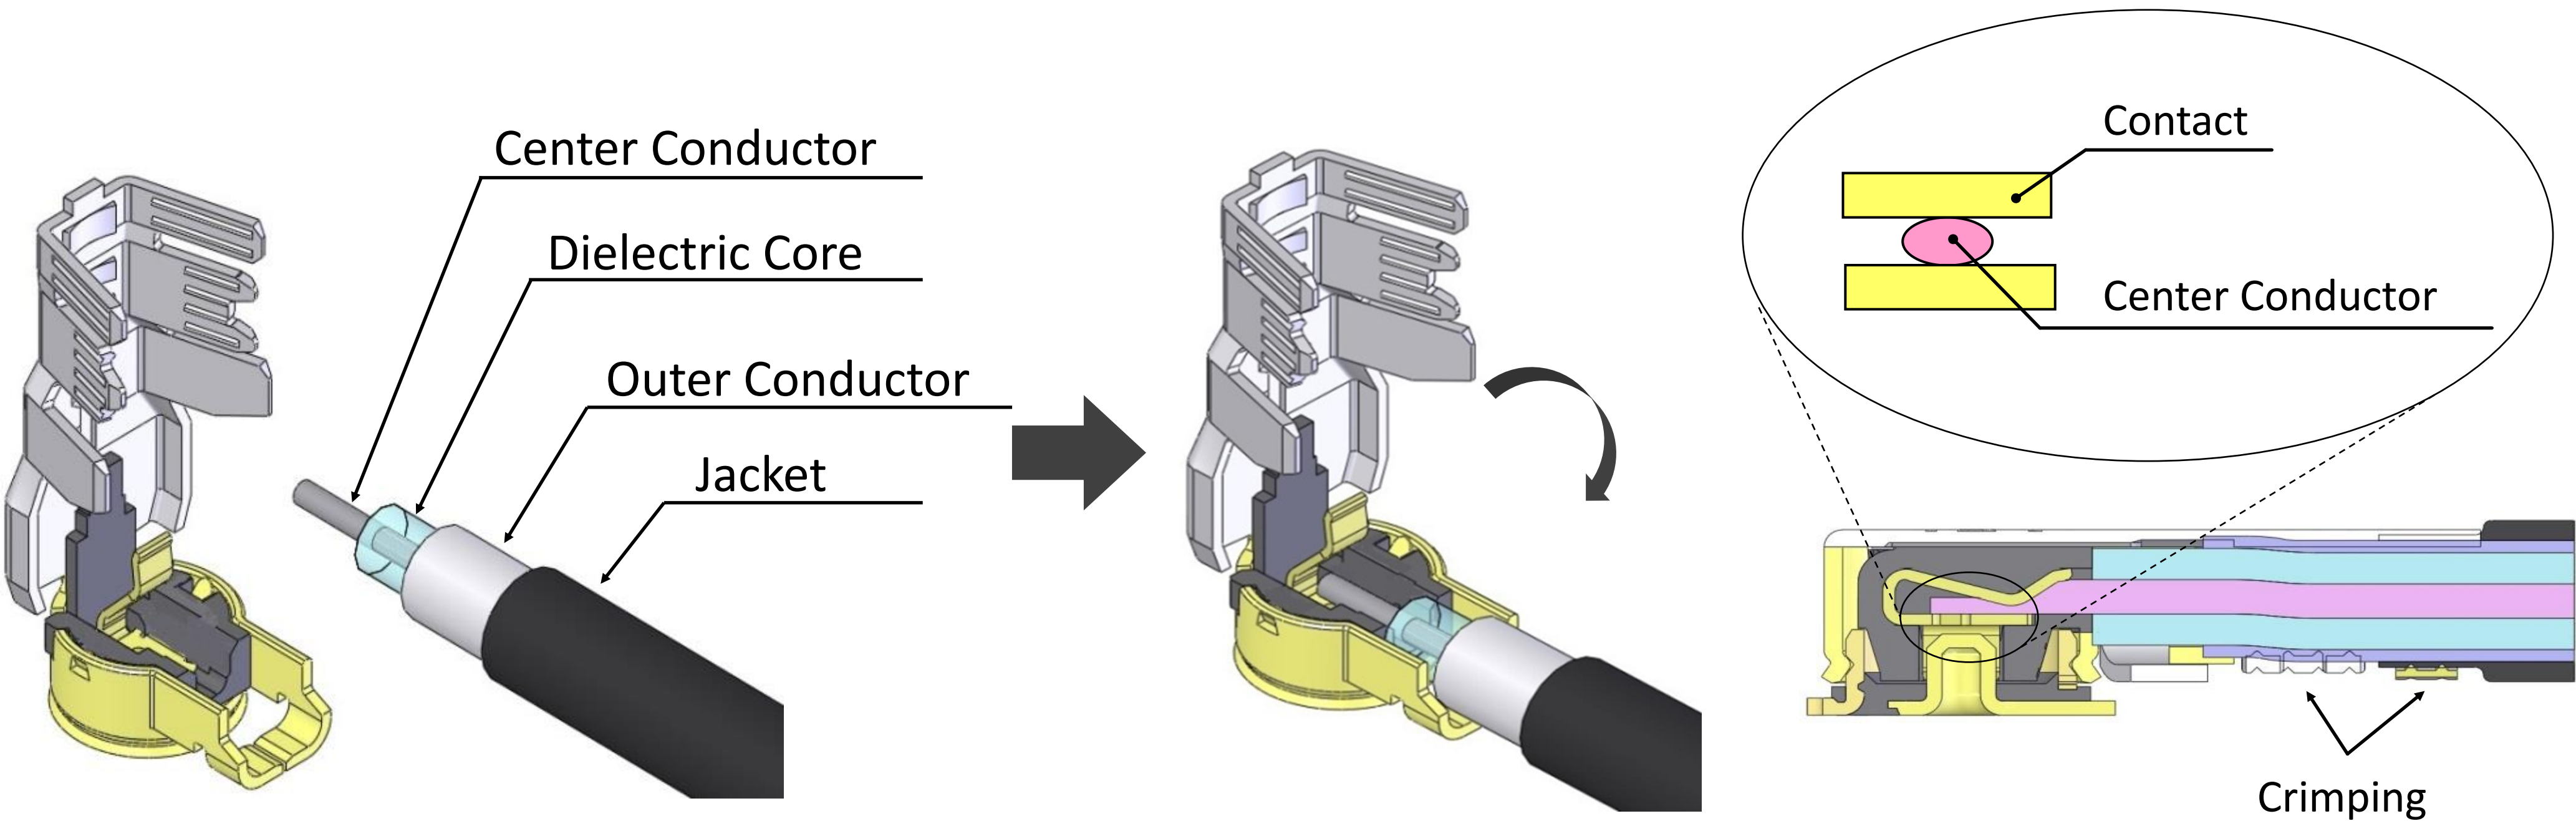


MHF® III Plug available micro-coax O.D. (AWG) : 0.81 mm (36), 0.64 mm (36)

Product name	MHF® III	MHF® 4L			MHF® I	
Mating Height	1.6 mm max.	1.7 mm max.	1.4 mm max.	1.2 mm max.	3.0 mm max.	2.5 mm max.
Coax O.D. (Center Conductor AWG)	2.00 mm (AWG#26)				●	
	1.80 mm (AWG#30)					●
	1.37 mm (AWG#30)	●				●
	1.32 mm (AWG#32)					●
	1.13 mm (AWG#32)		●			●
	0.95 mm (AWG#33)		●			
	0.81 mm (AWG#36)	●		●		●
	0.64 mm (AWG#36)	●		●		
Receptacle	MHF III receptacle	MHF 4 receptacle , MHF 4L receptacle			MHF I receptacle	

## Component Parts Details

## MHF® III plug Ni top

Recommended P/N		20609-002R
PART NO.		
20609-002R		

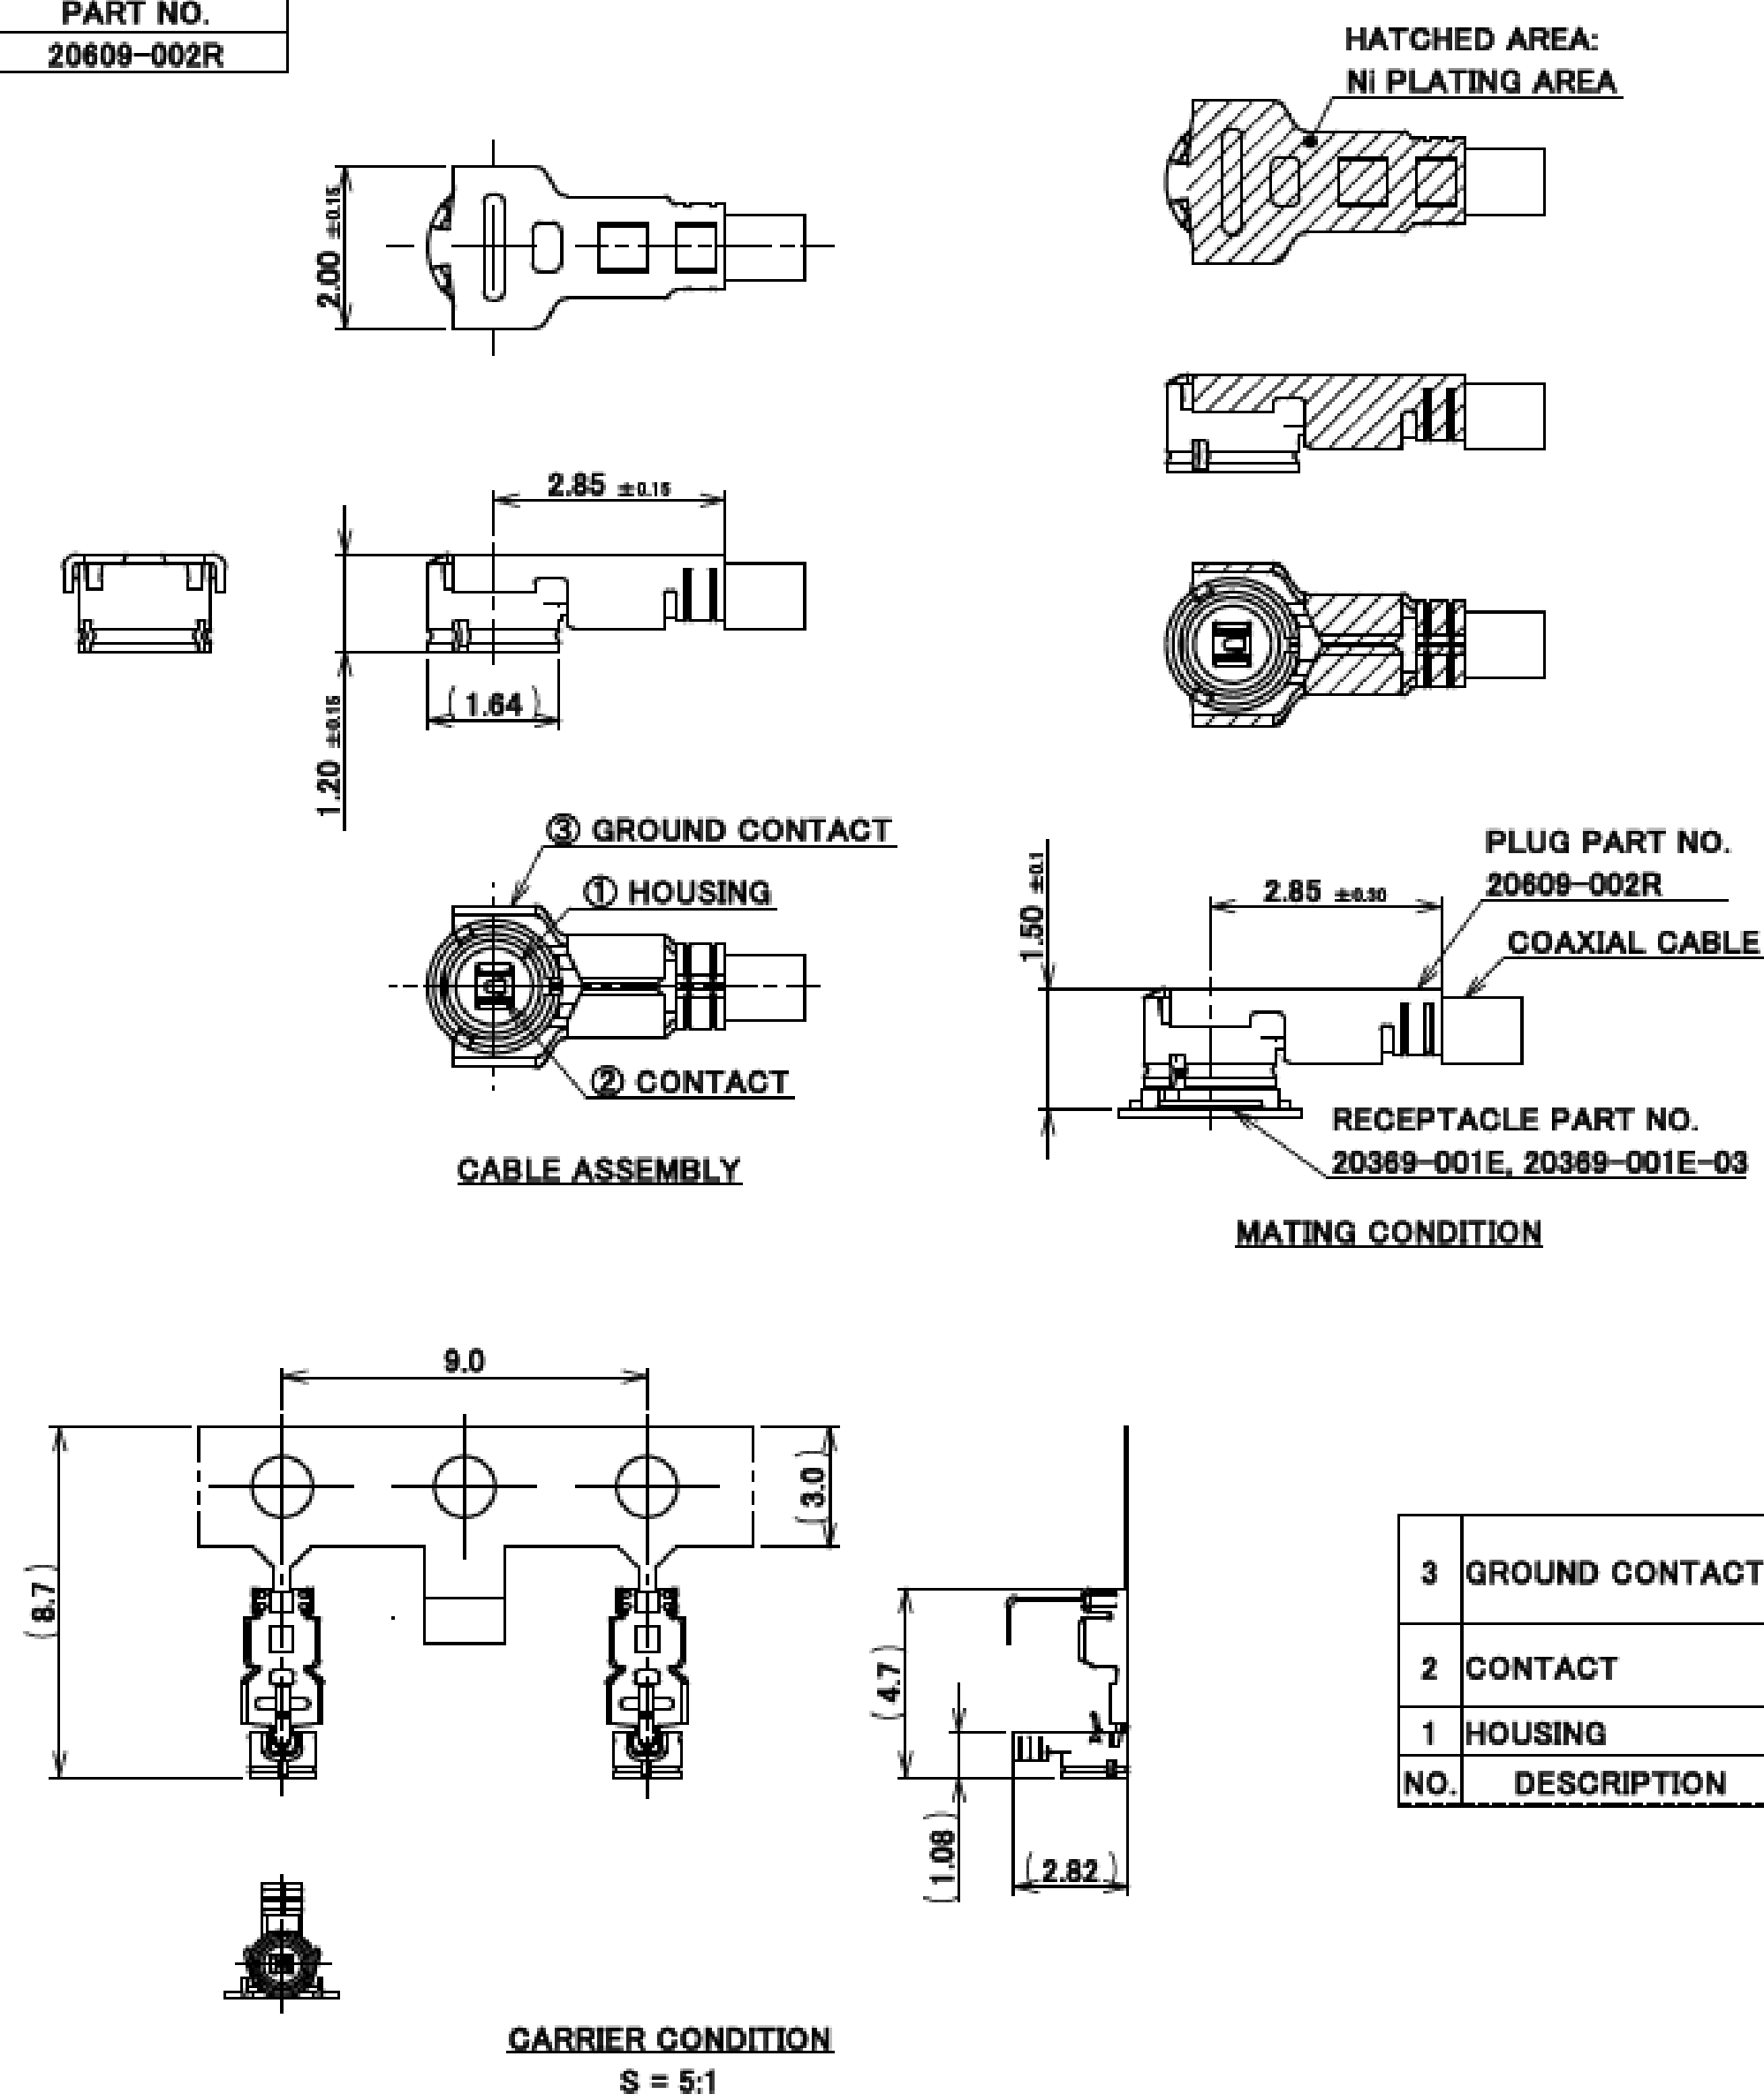

NOTES.

1. APPLICABLE CONNECTOR: 20369-001E, 20369-001E-03
2. PERMISSIBLE LOAD OF CABLE AT MATING.
3. MATING AND UNMATING INSTRUCTION


3-1. MATING

MATE THE CONNECTOR VERTICALLY AS MUCH AS POSSIBLE,  
ADJUSTING THE MATING AXIS OF PLUG AND RECEPTACLE.  
DO NOT SLANT MATE.

3-2. UNMATING

3-2-1. IN CASE OF UNMATING BY PULLING TOOL ( P/N : 90287-001 ).  
USE THE PULLING TOOL AS THE FOLLOWING DRAWING, AND PULL PLUG  
TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

3-2-2. IN CASE OF UNMATING DIRECTLY BY HAND.  
CATCH THE CATCHING AREA OF PLUG, AND PULL PLUG TO VERTICAL  
DIRECTION AS DIRECTLY AS POSSIBLE.







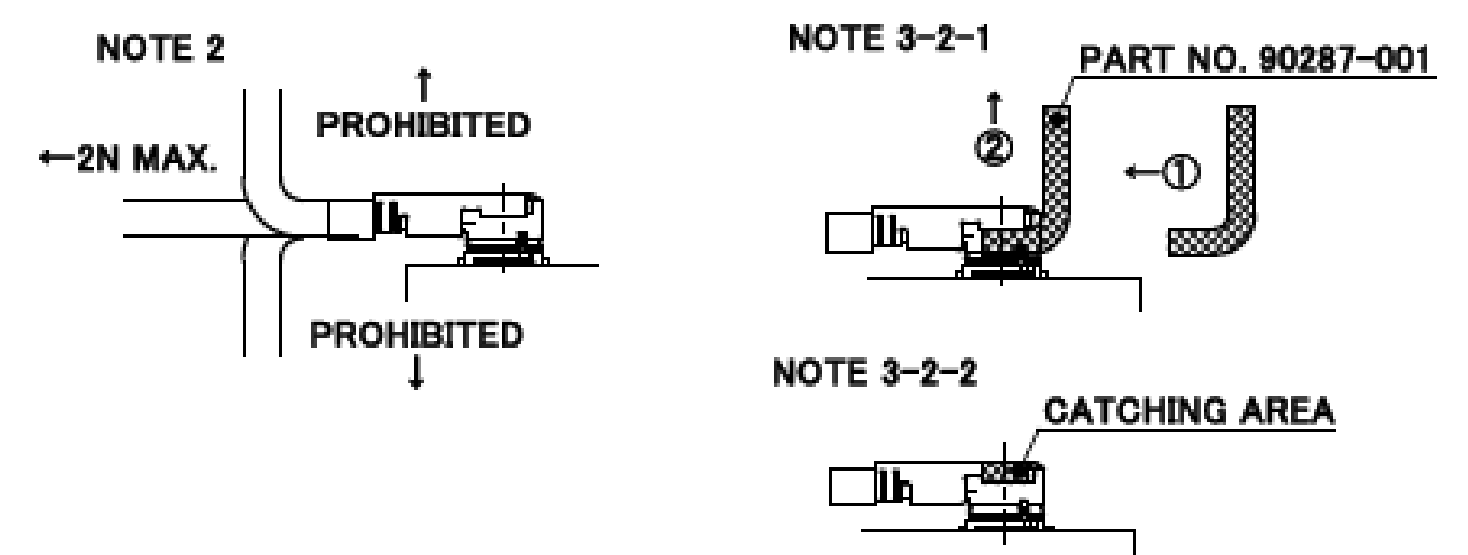


3	GROUND CONTACT	PHOSPHOR BRONZE	ALL OVER Ni 1.00 $\mu$ m MIN. CONTACT PART Au 0.02 $\mu$ m MIN. [Ni PLATIN AREA] Ni ONLY
2	CONTACT	PHOSPHOR BRONZE	ALL OVER Ni 1.00 $\mu$ m MIN. CONTACT PART Au 0.03 $\mu$ m MIN.
1	HOUSING	LCP	UL94V-0, WHITE
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS

MHF® III plug Ni top

ITEMS	SPECIFICATION
APPLICABLE CONNECTOR PART No.	20369-001E
RATING VOLTAGE	60 V AC (R.M.S)
RATING FREQUENCY	DC ~ 6 GHz
OPERATING TEMPERATURE	233 ~ 363 K(-40°C ~ +90°C)
VSWR	1.3 MAX. AT DC ~ 3 GHz, 1.5 MAX. AT 3 ~ 6 GHz
MAIN CONTACT RESISTANCE	INITIAL : 20 mohm MAX. / AFTER TEST : $\angle$ R 20 mohm MAX.
GROUND CONTACT RESISTANCE	INITIAL : 20 mohm MAX. / AFTER TEST : $\angle$ R100 mohm MAX.
INSULATION RESISTANCE	INITIAL : 500 Mohm MIN. / AFTER TEST : 100 Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC 200 V 1 MINUTE
DURABILITY	30 CYCLES
TOTAL UNMATING FORCE (INITIAL / AFTER TEST)	INITIAL: 4 N MIN. / AFTER: 2 N MIN.
CRIMP STRENGTH	7 N MIN.
PRODUCT SPECIFICATION	PRS-2107
TEST REPORT	TR-15061
PACKING STANDARD	300-340
INSTRUCTION MANUAL	HIM-07002


Rev.1

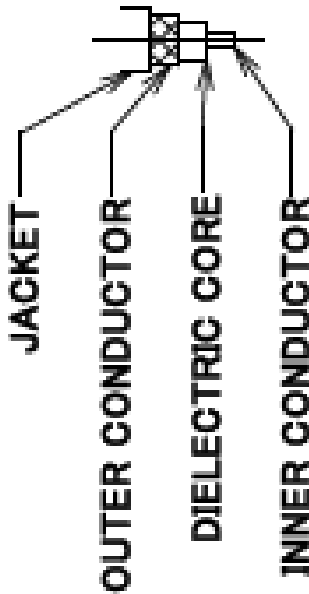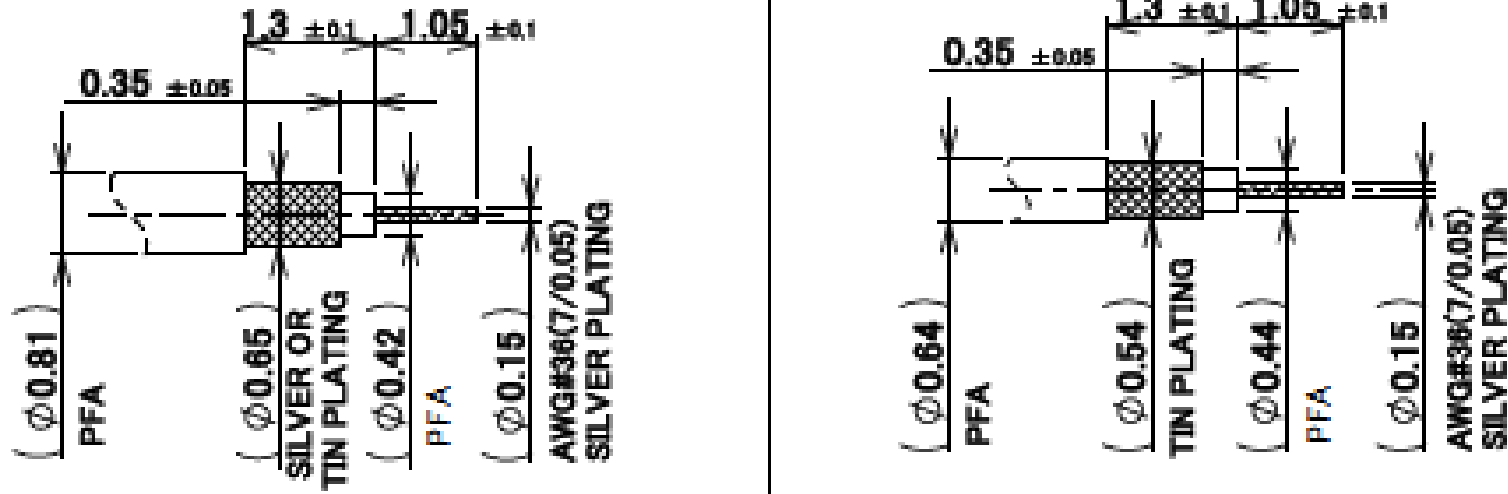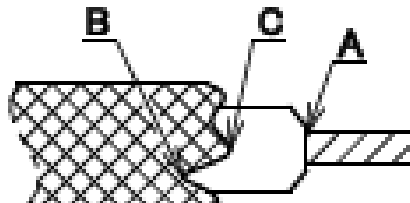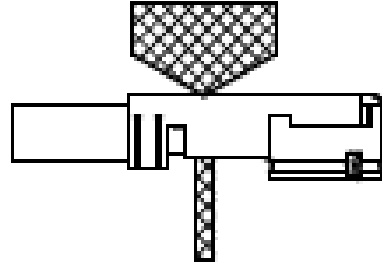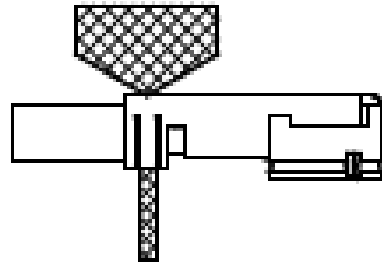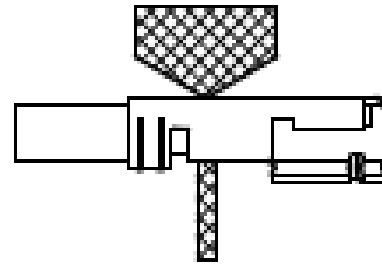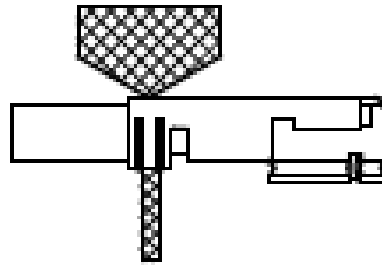PART NO.	20609-002R			
<div></div>	<div></div> <div>MUST NOT USE SOLDER COATED INNER CONDUCTOR AND OUTER CONDUCTOR.</div> <div><div>B : MAXIMUM LENGTH C : MINIMUM LENGTH 0.35±0.05 = A-C ≠ A-B</div></div>			
REQUIREMENTS	CHARACTERISTIC IMPEDANCE : 50 OHM BY TDR METHOD NOMINAL CAPACITANCE (REFERENCE VALUE) : 96pF/m CONDUCTOR RESISTANCE OF INNER CONDUCTOR AT 293 K (REFERENCE VALUE) : 1400 OHM/km INSULATION RESISTANCE : 1000 MEGA-OHM.km MIN. DIELECTRIC WITH STANCE VOLTAGE : OD 0.81 TYPE ...NO BREAKDOWN AT AC 1000 V FOR 1 MIN. OD 0.64 TYPE ...NO BREAKDOWN AT AC 500 V FOR 1 MIN.			
BRAIDED SHIELD OF OUTER CONDUCTOR	SINGLE		SINGLE	
P/N OF SEMI AUTO TERMINATION MACHINE	90283-008 SEMI-AUTO		90283-006 SEMI-AUTO	
CRIMP HEIGHT				
	USE FOR POINT MICROMETER CH-1 (i-Fit® PART) 0.89~0.93	USE FOR POINT MICROMETER CH-2 (JACKET PART) 0.80~0.85	USE FOR POINT MICROMETER CH-1 (i-Fit® PART) 0.78~0.82	USE FOR POINT MICROMETER CH-2 (JACKET PART) 0.68~0.72

Rev.1




## Accessories for MHF® III plug Ni top




**MHF III SMA ADAPTOR**  
**PART NO. 90285-001**



**MHF III INSPECTION CONNECTOR**  
**PART NO. 90286-001**

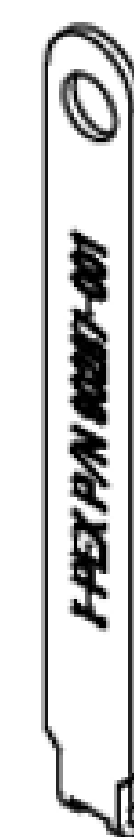

FRONT SIDE

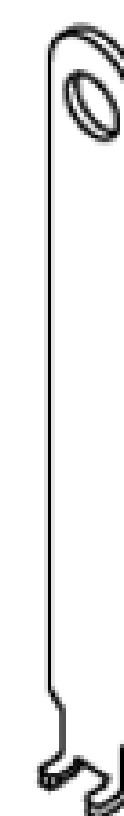







**BACK SIDE**

**MHF III PULLING TOOL**  
**PART NO. 90287-001**

Rev.1

## MHF® III Receptacle

Recommended P/N		20369-001E-03
PART NO.	PACKING REEL	PACKING QUANTITY
20369-001E	CORRUGATED PAPER REEL	5,000/REEL
20369-001E-03	PLASTIC REEL	

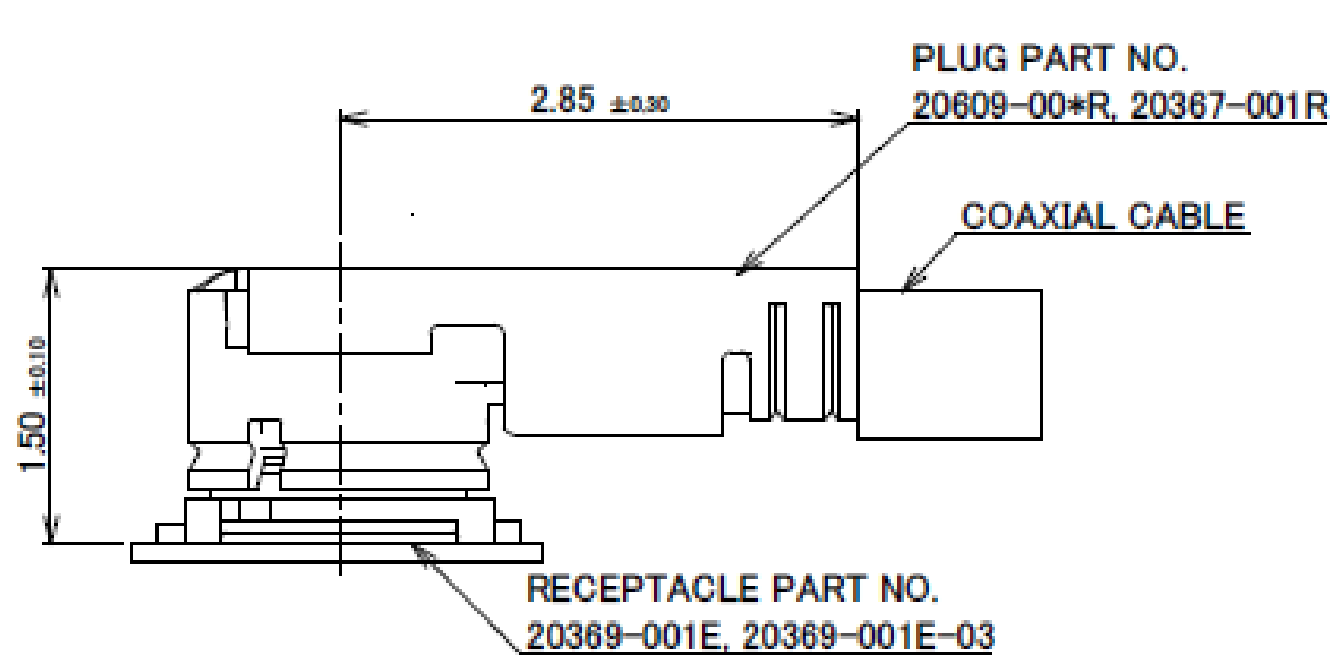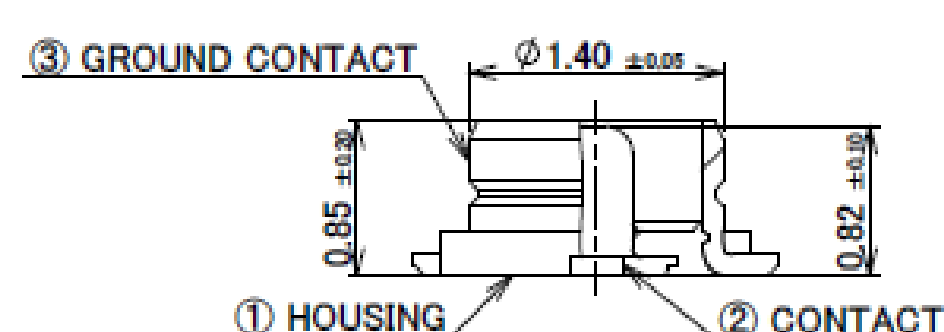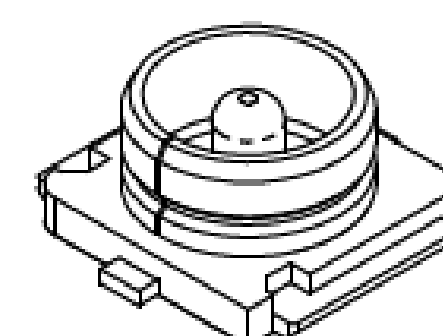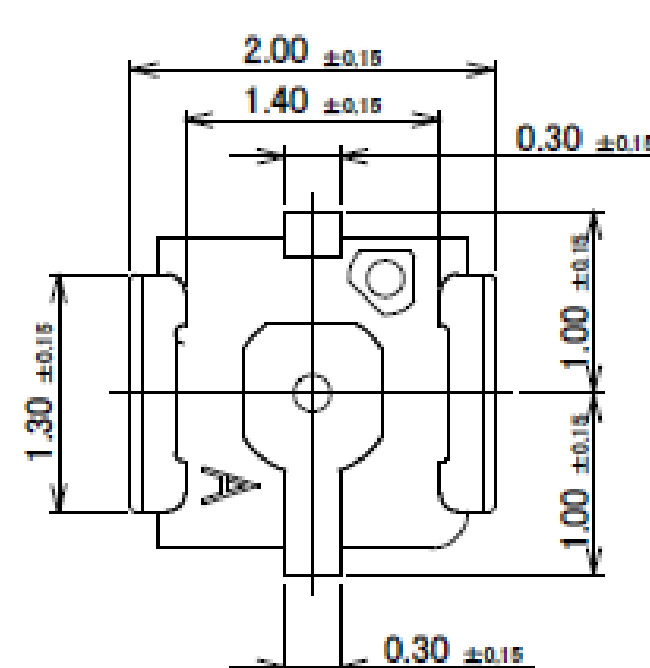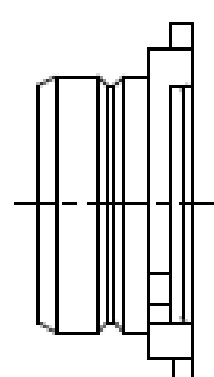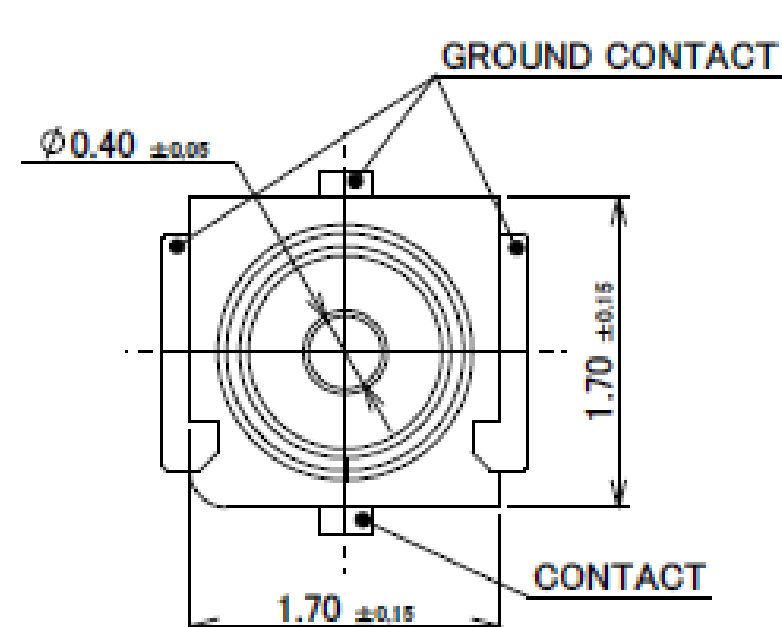

### MATING CONDITION

NOTES.

1. APPLICABLE CONNECTOR  
20609-00\*R  
20367-001R
2. COPLANARITY : 0.1MAX.


3	GROUND CONTACT	PHOSPHOR BRONZE	ALL OVER Ni 1.00 $\mu$ m MIN. CONTACT PART Au 0.03 $\mu$ m MIN. SOLDERING PART Au 0.03 $\mu$ m MIN.
2	CONTACT A	BRASS	ALL OVER Ni 1.00 $\mu$ m MIN. CONTACT PART Au 0.1 $\mu$ m MIN. SOLDERING PART Au 0.1 $\mu$ m MIN.
1	HOUSING	LCP	UL94V-0, BLACK
NO	DESCRIPTION	MATERIAL	FINISH REMARKS

Rev.11


MHF® III Receptacle

ITEMS	SPECIFICATION
APPLICABLE CONNECTOR PART No.	20609-002R
RATING VOLTAGE	60 V AC (R.M.S)
RATING FREQUENCY	DC ~ 6 GHz
OPERATING TEMPERATURE	233 ~ 363 K(-40°C ~ +90°C)
VSWR	1.3 MAX. AT DC ~ 3 GHz, 1.4 MAX. AT 3 ~ 6 GHz
MAIN CONTACT RESISTANCE	INITIAL : 20 mohm MAX. / AFTER TEST : $\angle$ R 20 mohm MAX.
GROUND CONTACT RESISTANCE	INITIAL : 20 mohm MAX. / AFTER TEST : $\angle$ R100 mohm MAX.
INSULATION RESISTANCE	INITIAL : 500 Mohm MIN. / AFTER TEST : 100 Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC 200 V 1 MINUTE
DURABILITY	30 CYCLES
TOTAL UNMATING FORCE (INITIAL / AFTER TEST)	INITIAL: 4 N MIN. / AFTER: 2 N MIN.
PRODUCT SPECIFICATION	PRS-2107
TEST REPORT	TR-15061
PACKING STANDARD	300-339
INSTRUCTION MANUAL	HIM-07002
APPEARANCE CRITERIA No.	QLS-A***


Rev.11

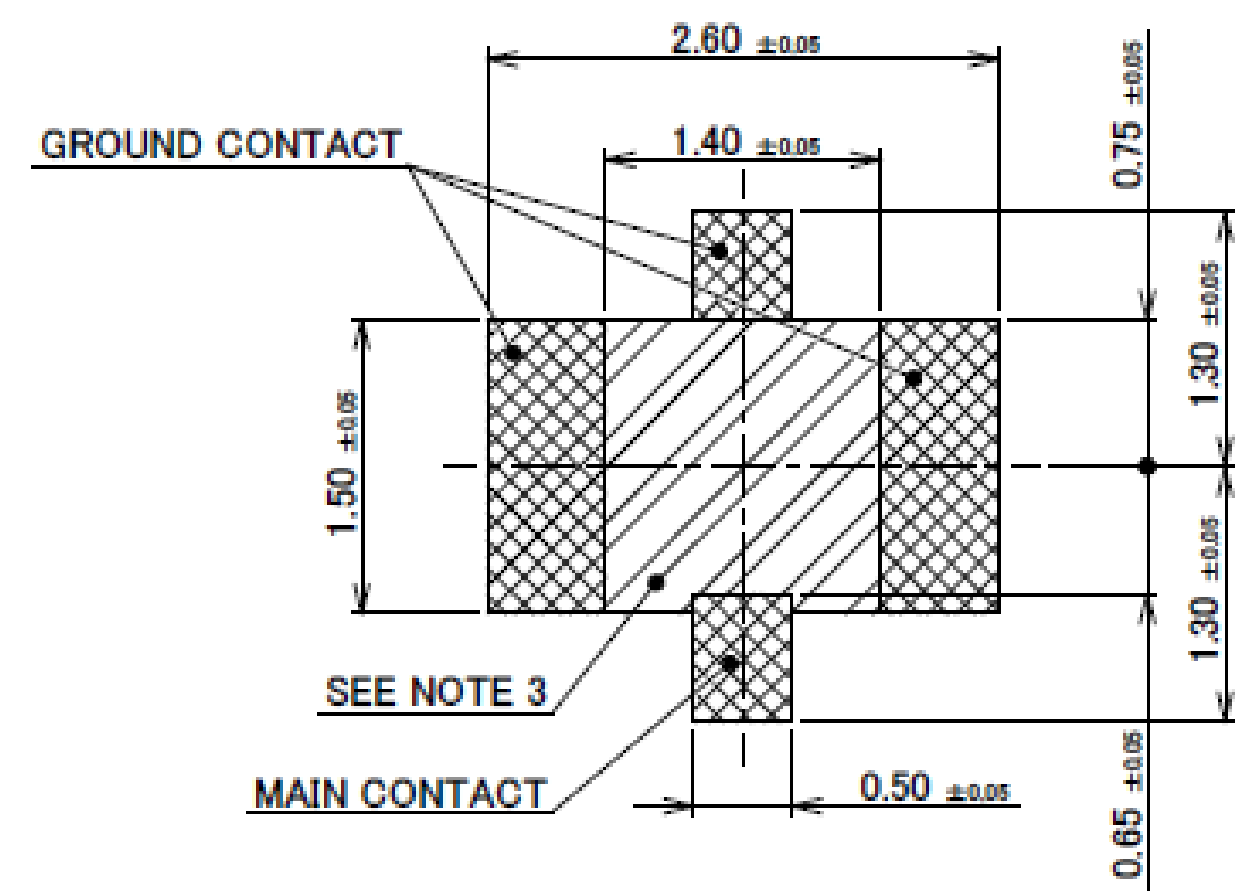


RECOMMENDED FOOTPRINT PATTERN

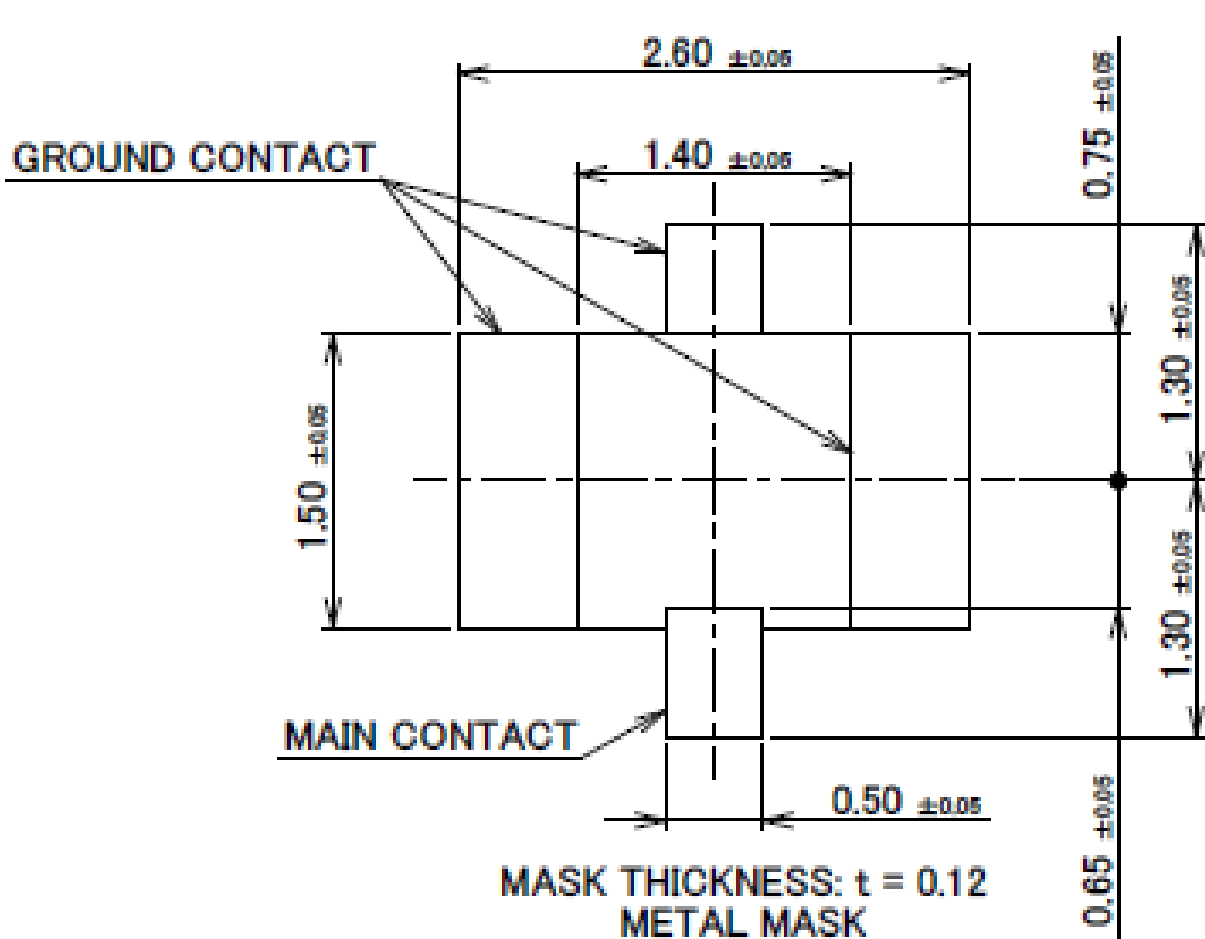

RECOMMENDED FOOTPRINT PATTERN

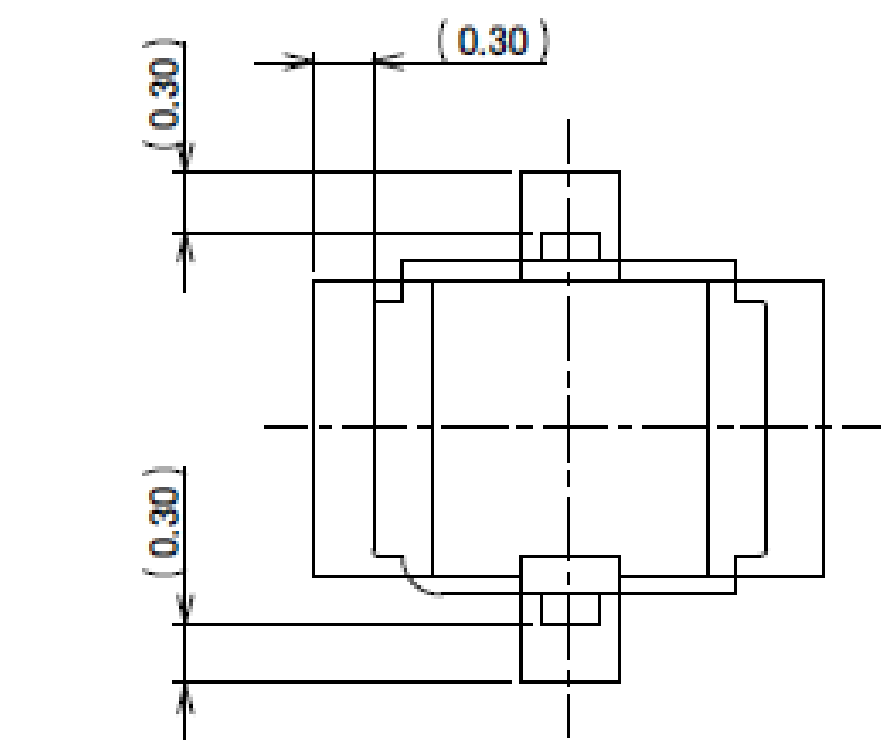

CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN

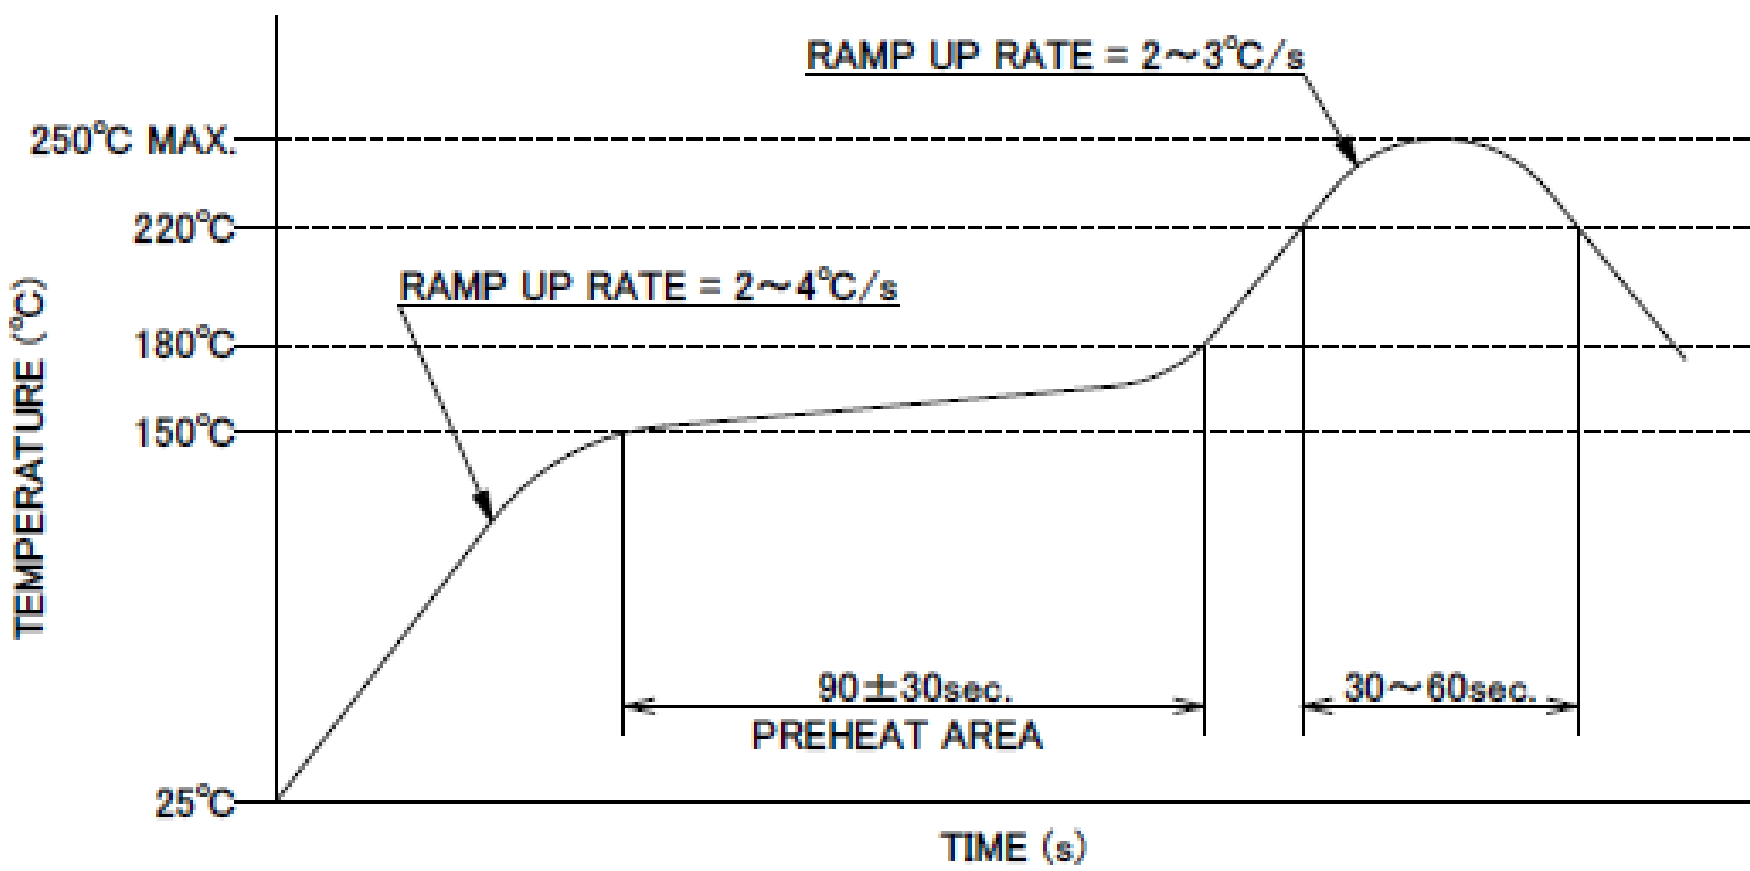

REFLOW TEMPERATURE PROFILE  
SENJU METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)


NOTES  
3. PATTERN AND RESISTPROHIBITION AREA

Rev.11

Accessories for MHF® III Receptacle



MHF III SMA ADAPTER  
PART NO. 90285-002

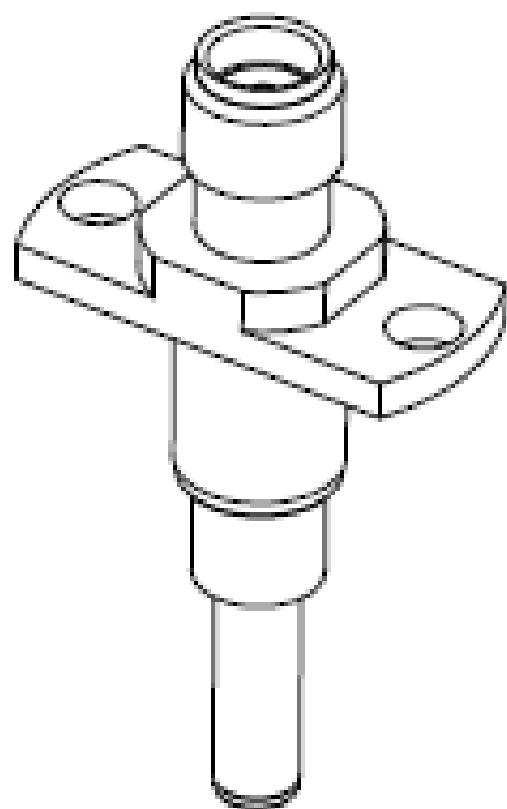

MHF III SMA ADAPTER HIGH CYCLE TYPE  
PART NO. 90491-001

Rev.11

Board to  
Board



High-Density




Autolocking  
FPC/FFC



High-Density



FPC/FFC

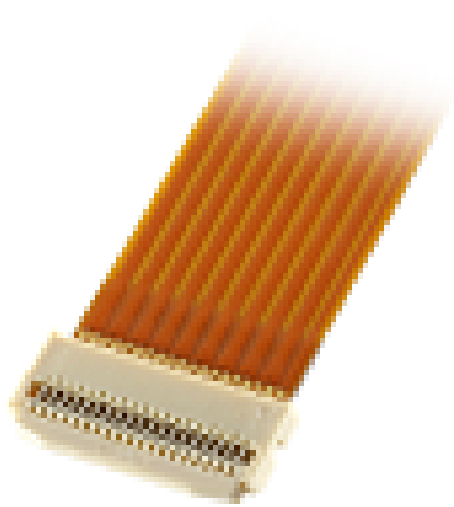

Micro-Coaxial  
/ Discrete Cable



High-Speed



RF



High-Frequency



Optical  
Module



High-Speed




Power



High-Power



I/O  
(Input/Output)

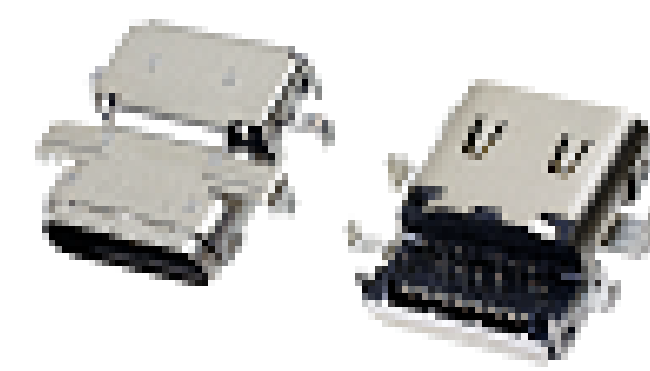

Quick charge



Effector



Custom  
Connectors  
Available


Inquiry



I-PEX, MHF, CABLINE, NOVASTACK, EVAFLEX, MINIFLEX, ISH, IARPB, IASLP, ESTORQ, ISFIT, i-Fit and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update Information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative  
or more detailed information.

[www.i-pex.com](http://www.i-pex.com)



I-PEX

© I-PEX Inc. 2022  
All rights reserved.