

2J6A02Ba

2.4/5.0 GHz ISM MIMO Screw Mount

Key Features

Cable 1: 2.4/5.0 GHz ISM

- 2410-2490 MHz
- 4920-5925 MHz

Cable 2: 2.4/5.0 GHz ISM

- 2410-2490 MHz
- 4920-5925 MHz

Screw Mount

Anti-Rotation Mechanism

Ground Plane Independent

Customizable Cable and Connector

IP67, IK09, IP69K

Dimensions Ø 77.3 × 65.5 mm



Note: Antenna is isolated from ground plane to provide common mode surge protection up to 6kV



1. Antenna and electrical specifications

Cable 1

Parameters	2.4/5.0 GHz ISM Antenna	
Standards	WiFi, BT, ZigBee, ISM	
Band (MHz)	2.4 GHz	5.0 GHz
Frequency (MHz)	2410-2490	4920-5925
Return Loss (dB)	~-11.3	~-12.4
VSWR	~1.8:1	~1.8:1
Efficiency (%)	~50.5	~48
Peak Gain (dBi)	~2.6	~4.4
Average Gain (dB)	~-3.0	~-3.2
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	
Connector Type	SMA-Male Standard (Other Connectors Available)	
Cable Length	300 cm Standard (Any Cable Length Available)	
Cable Type	LMR195 Standard (Other Cables Available)	

Cable 2

Parameters	2.4/5.0 GHz ISM Antenna	
Standards	WiFi, BT, ZigBee, ISM	
Band (MHz)	2.4 GHz	5.0 GHz
Frequency (MHz)	2410-2490	4920-5925
Return Loss (dB)	~-8.9	~-11.8
VSWR	~2.1:1	~1.9:1
Efficiency (%)	~44.6	~45
Peak Gain (dBi)	~2.4	~4.4
Average Gain (dB)	~-3.5	~-3.5
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	
Connector Type	SMA-Male Standard (Other Connectors Available)	
Cable Length	300 cm Standard (Any Cable Length Available)	
Cable Type	LMR195 Standard (Other Cables Available)	

Antenna Measurement Conditions:



Mounted on Metal Plate of 30 x 30 cm
 200 cm of Cable LMR195
 Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications


Specifications	2J6A02Ba
Mounting Type	Screw Mount
Dimensions (mm)	Ø 77.3 × 65.5
Max. Tighten Torque (Nm)	6 Nm
Radome	ASA
Radome color	Black or White
Antenna Base	Zamak
Gasket	TPE
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67, IK09, IP69K

3. Antenna parameters


Cable 1: 2.4/5.0 GHz ISM

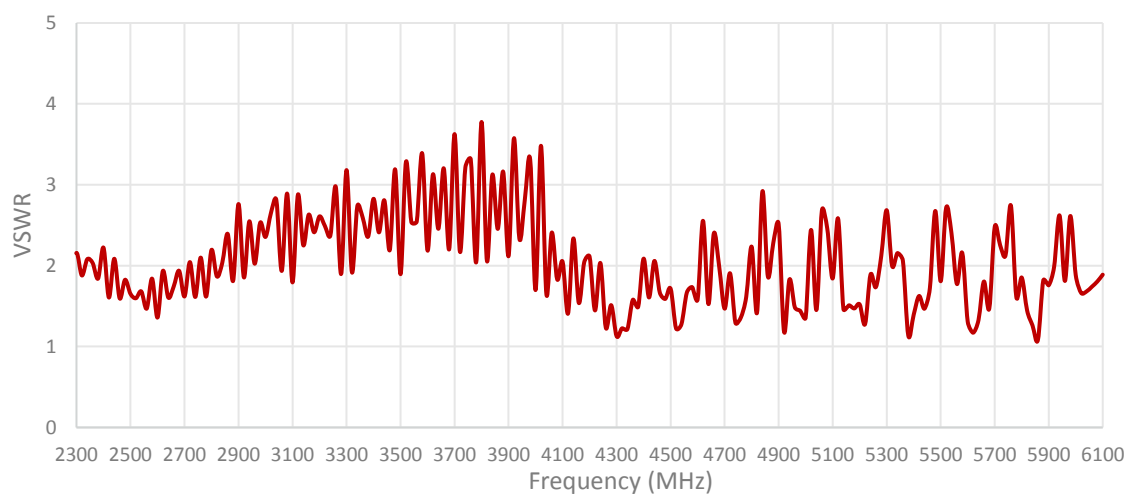
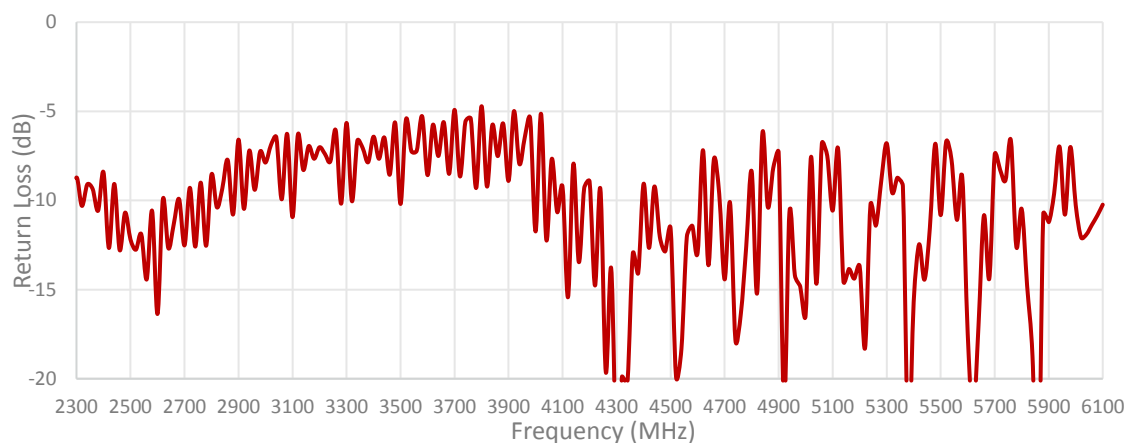


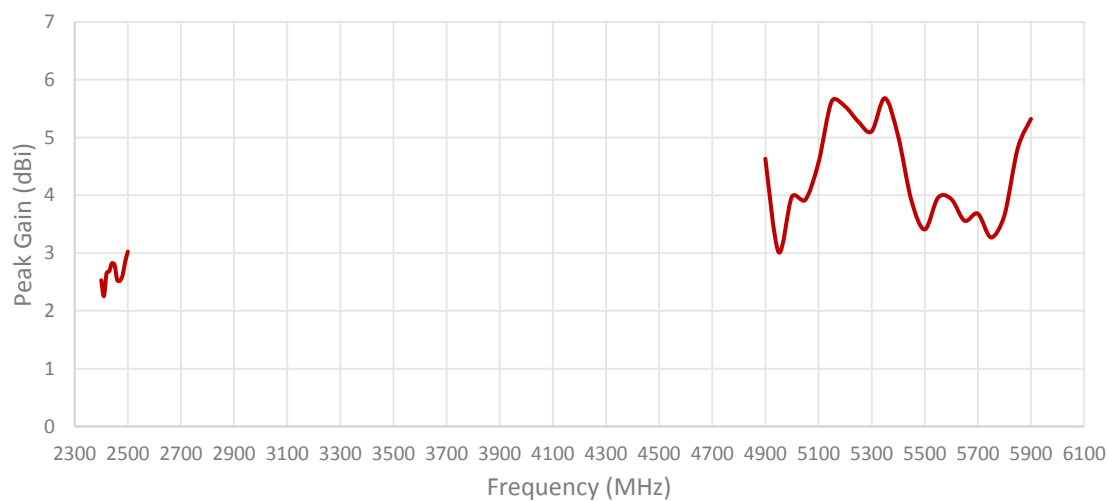
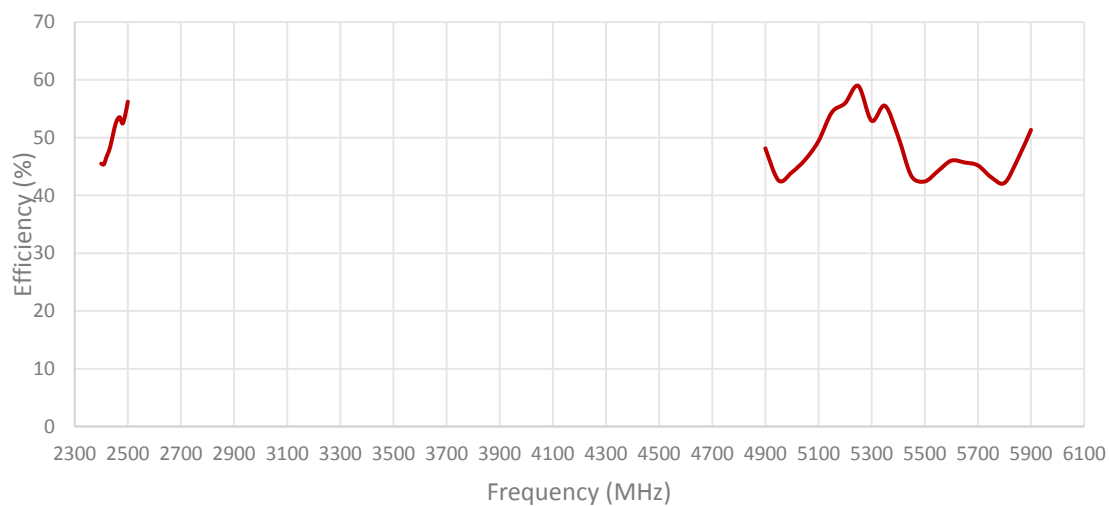


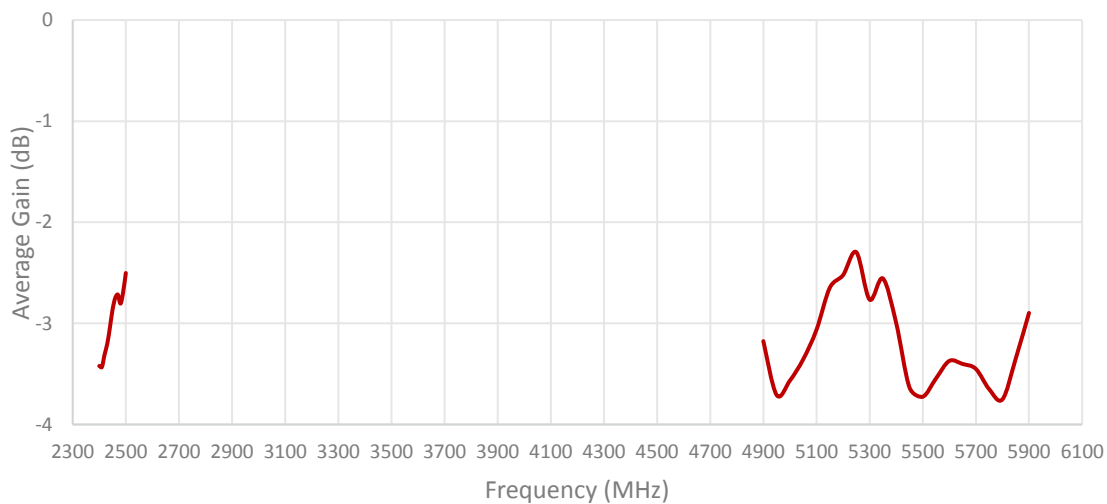


Cable 2: 2.4/5.0 GHz ISM

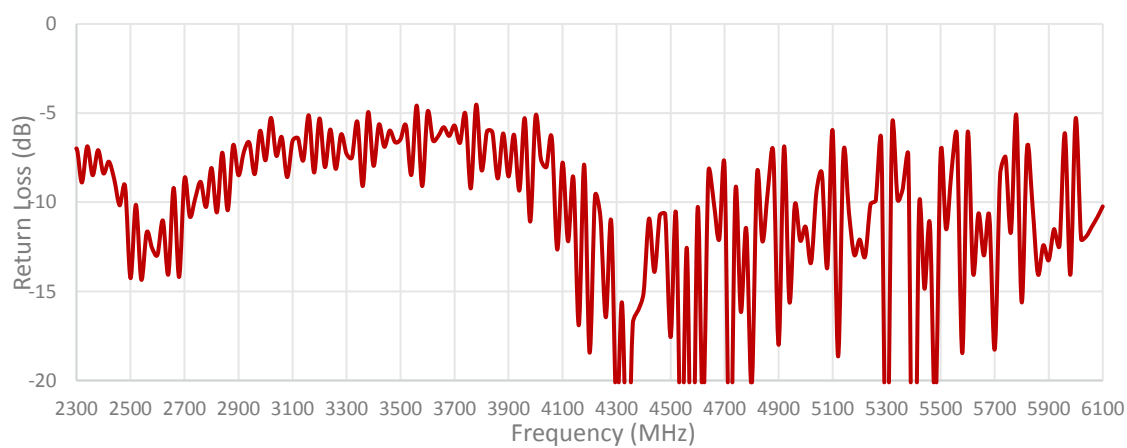

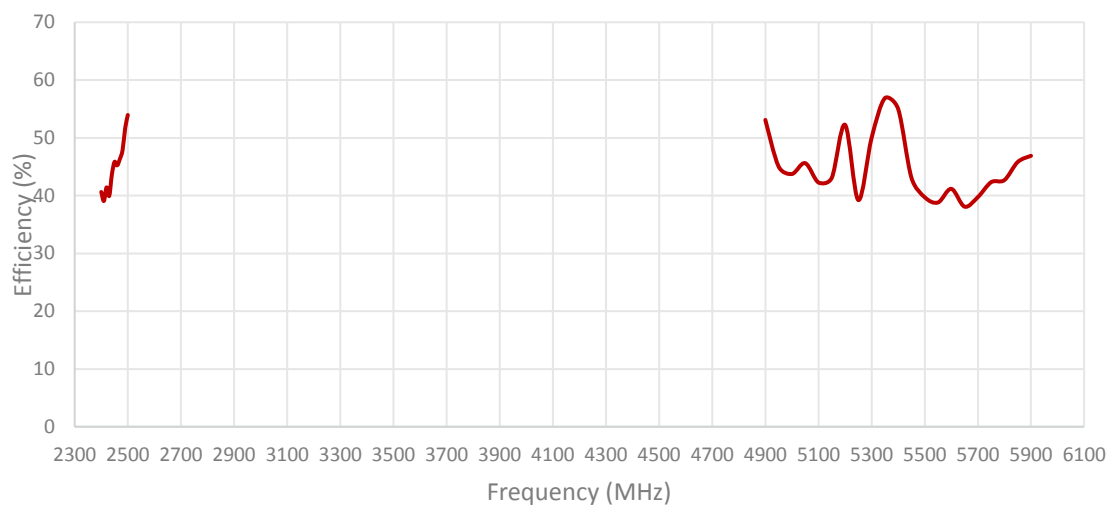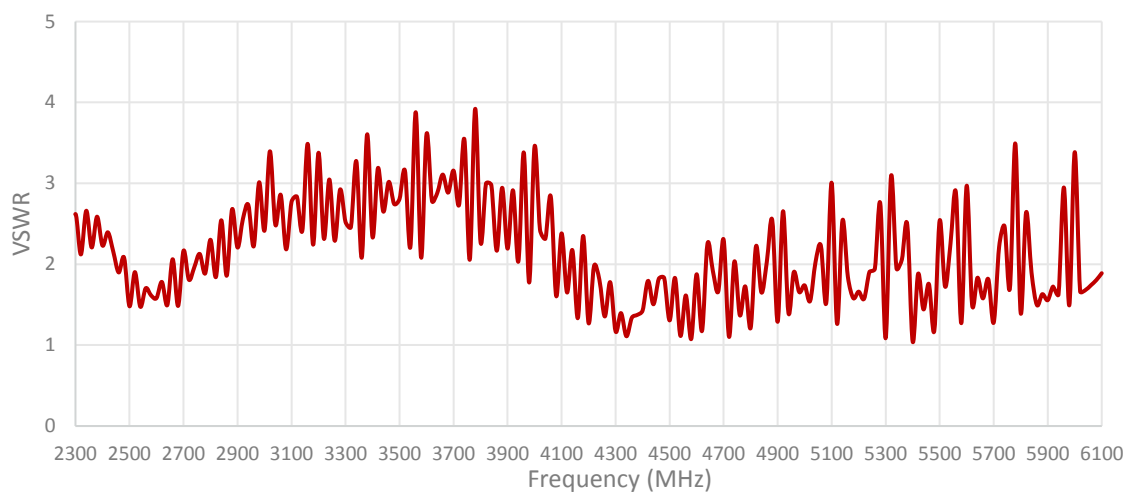


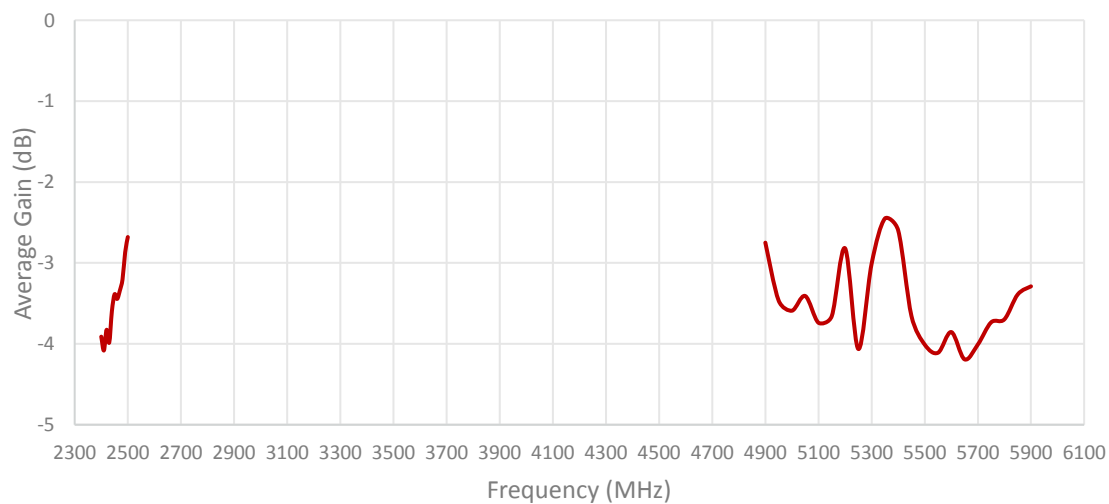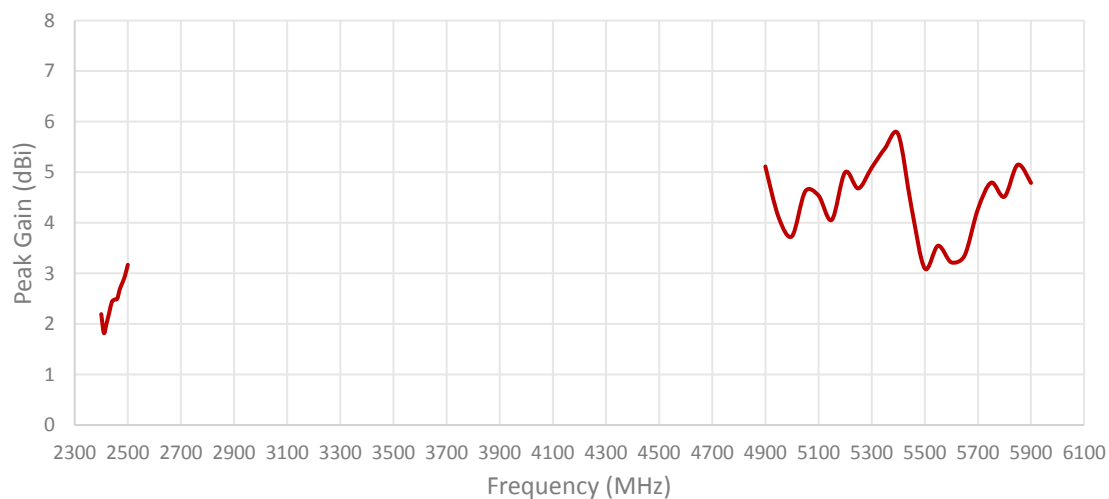


ISOLATION FOR CABLE 1 AND 2

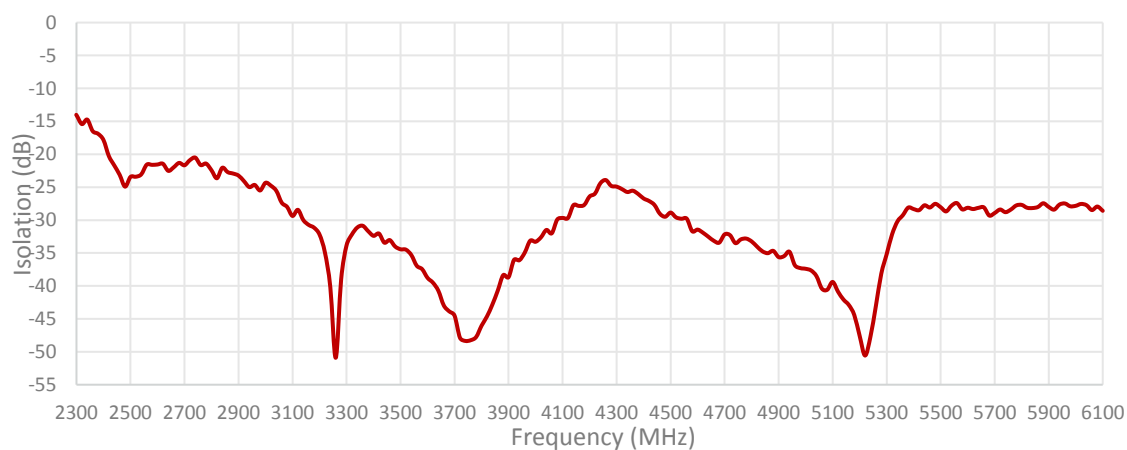


ENVELOPE CORRELATION COEFFICIENT FOR CABLE 1 AND 2

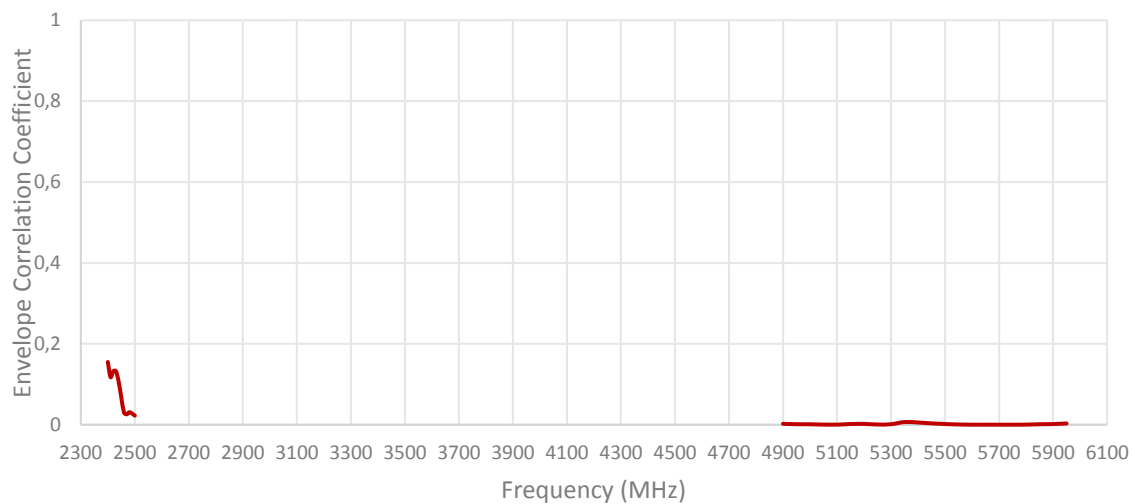

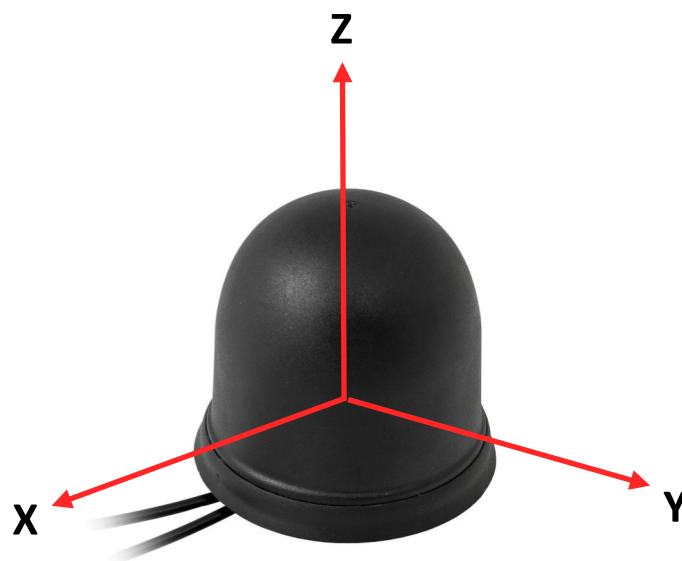


Radiation pattern reference

Cable 1: 2.4/5.0 GHz ISM

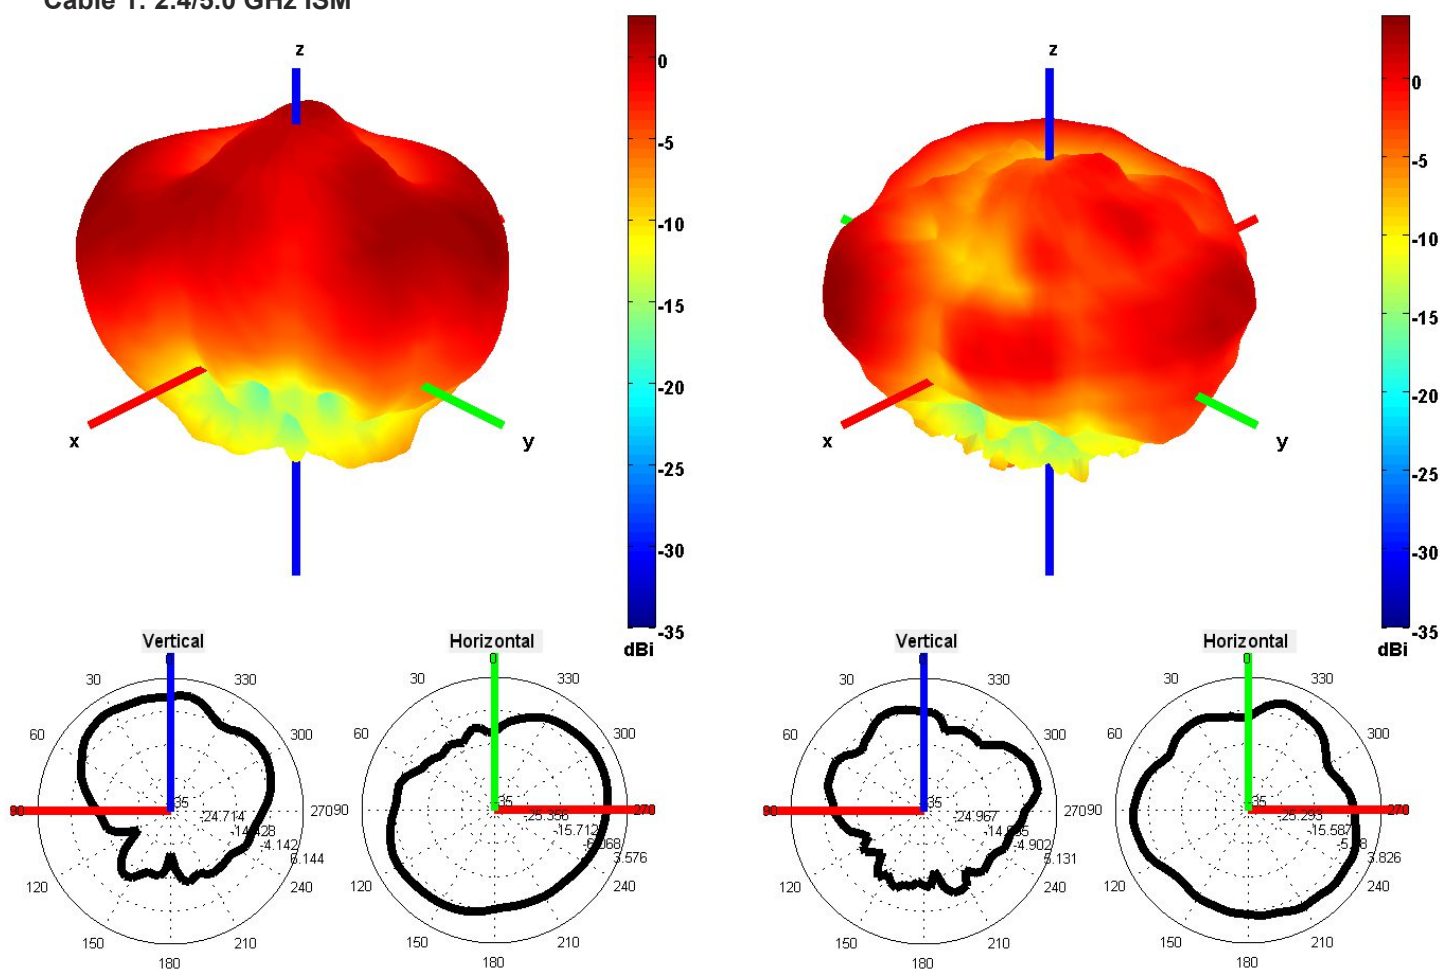


2450 and 5500 MHz Radiation pattern

Cable 2: 2.4/5.0 GHz ISM

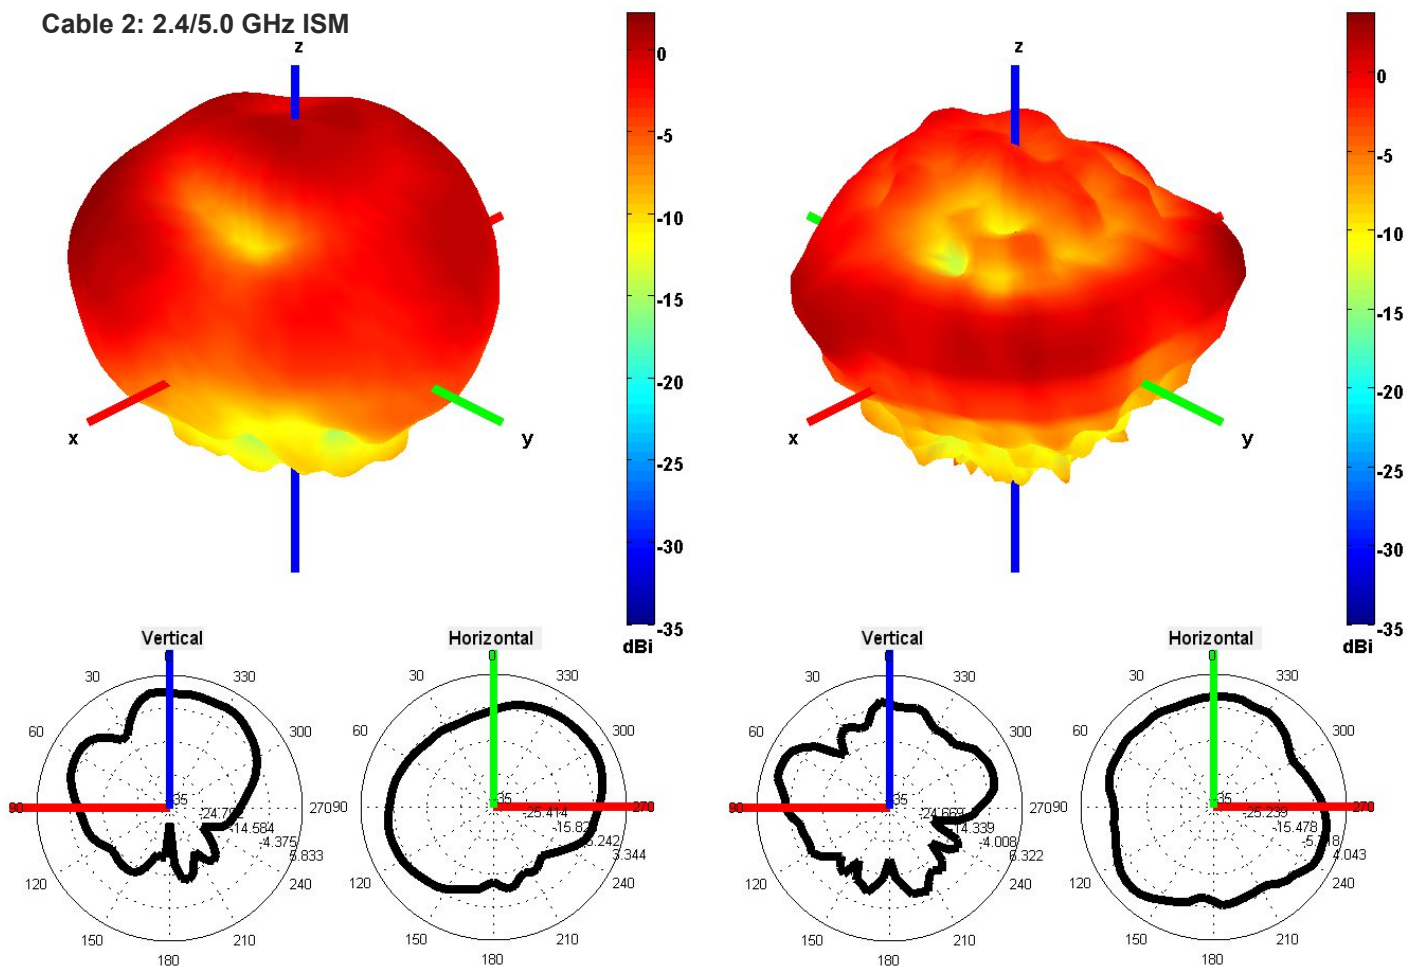

2450 and 5500 MHz Radiation pattern

4. Antenna drawings

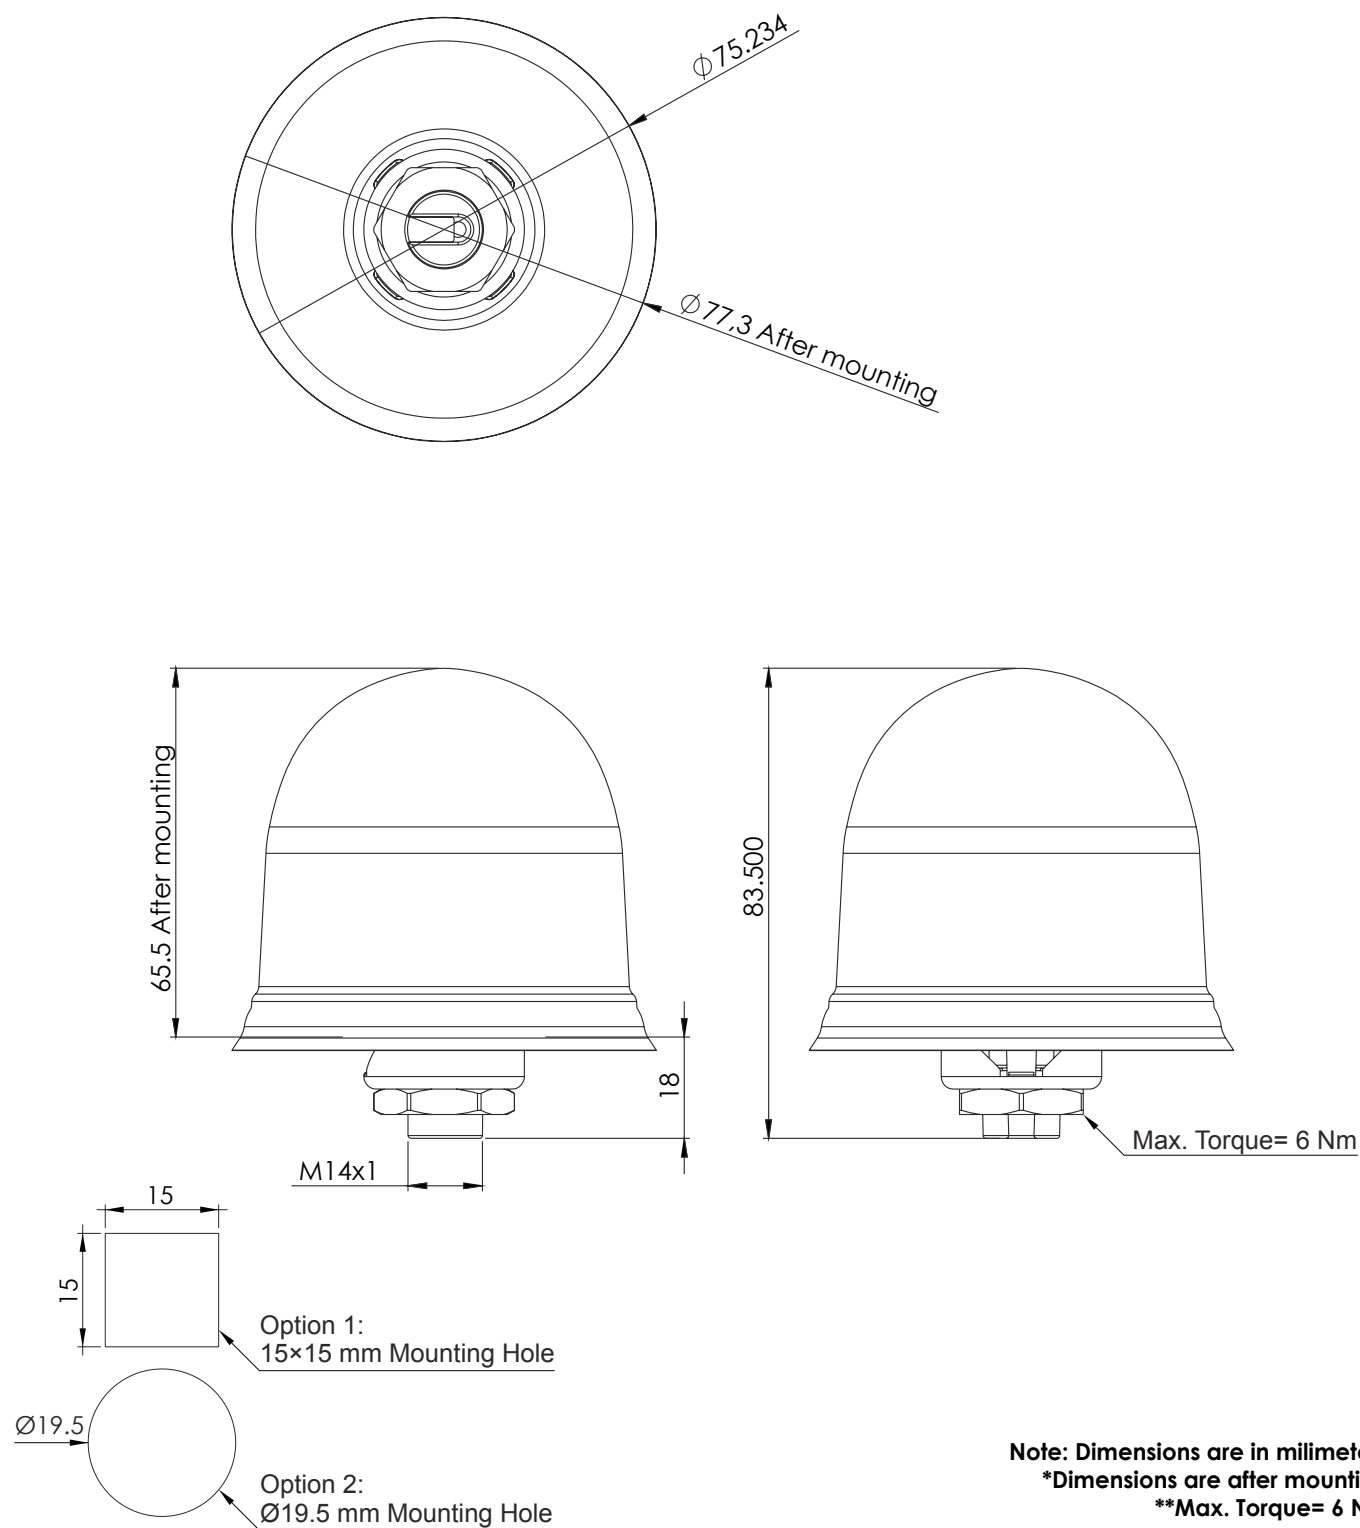

5. Antenna Images





Макро Групп – это:

- дистрибьютор электронных компонентов с 1994 года
- контрактный производитель электроники с 2007 года с собственным производством в Санкт-Петербурге (компания Макро ЕМС, входит в ГК Макро Групп)
- поставщик полупроводниковых материалов
- комплексный поставщик электронных компонентов
- моделирование и производство полупроводниковых эпитаксиальных гетероструктур для задач оптоэлектроники

Головной офис расположен в Санкт-Петербурге. Собственные представительства в крупных промышленных городах России и стран СНГ.

Преимущества для наших заказчиков:

- работа по тендерам с 2012 года
- оформление банковских гарантий
- отсрочки платежей
- поставка электронных компонентов по проектным ценам
- инженерная поддержка проектов заказчиков
- сертификат системы менеджмента качества ISO 9001-2015
- необходимые сертификаты и лицензии

Данный файл получен с сайта www.macrogroup.ru