


## Primary Lithium Battery

### CP705050

3.0V Primary Li-MnO<sub>2</sub> Battery

Soft Pack Type

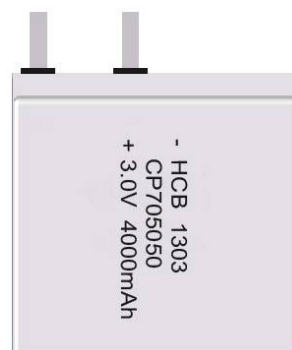

#### Electrical Characteristics

CP705050

Nominal Capacity	Data
Battery discharged at continuous current 5mA until voltage reaches cut-off voltage 2.0V at ambient temperature 23±2°C	4000mAh
Nominal Voltage	Data
	3.0V
Maximum Continuous Current	Data
Battery with minimum 50% rated capacity discharged at ambient temperature 23 ± 2°C	1500mA
Maximum Pulse Discharge Current	Data
Battery with minimum 50% rated capacity discharged at max pulse for 3 seconds after 27seconds break. Ambient temperature 23 ± 2°C	3000mA
Storage Condition	Data
Temperature ≤ 30°C Humidity ≤ 75%RH	
Operating Temperature	Data
	- 40~+60°C
Battery Dimension	Data
See drawing on pag	
Max Weight	Data
	32.0g
Self-discharge Rate	Data
Max self-discharged rate at ambient temperature 23 ± 2°C	2%
Shelf Life	Data
Ambient temperature 23 ± 2°C	10 years

#### Key features




- High Voltage
- High Energy Density
- Wide Operating Temperature Range
- Long Shelf Life
- High Safety
- UL, UN38.3 and ROHS certified

#### Main applications






- Alarm Systems
- Road Toll Transponder
- CMOS Back-up Power
- Medical Devices
- Active RFID
- Tyre Pressure Testing System
- GPRS System
- GSM System

**CP705050**

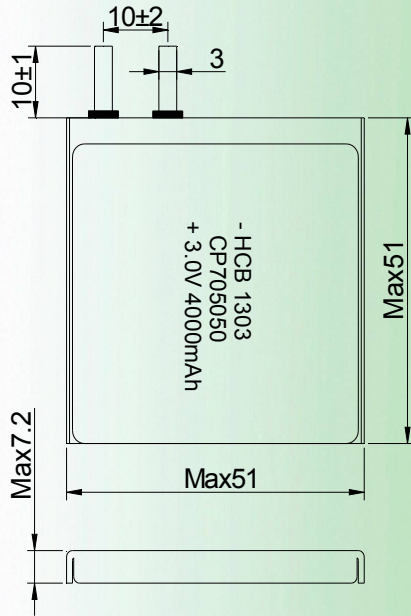

**Warning**

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C

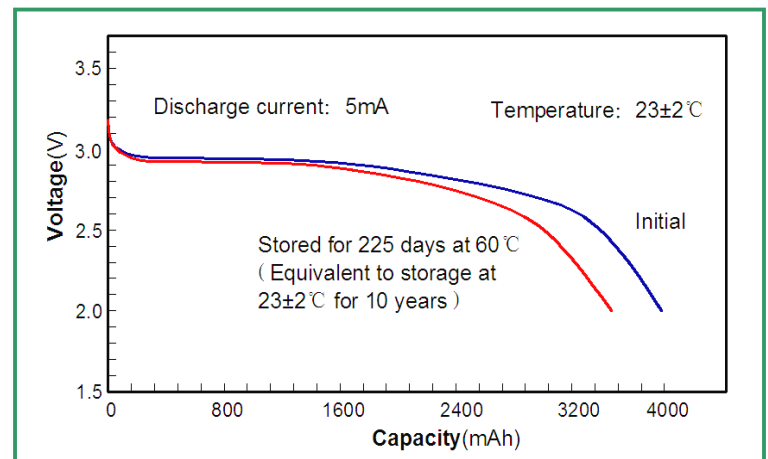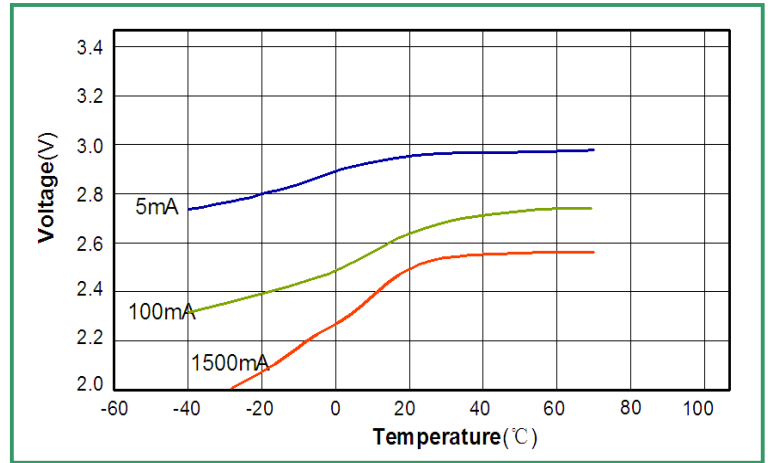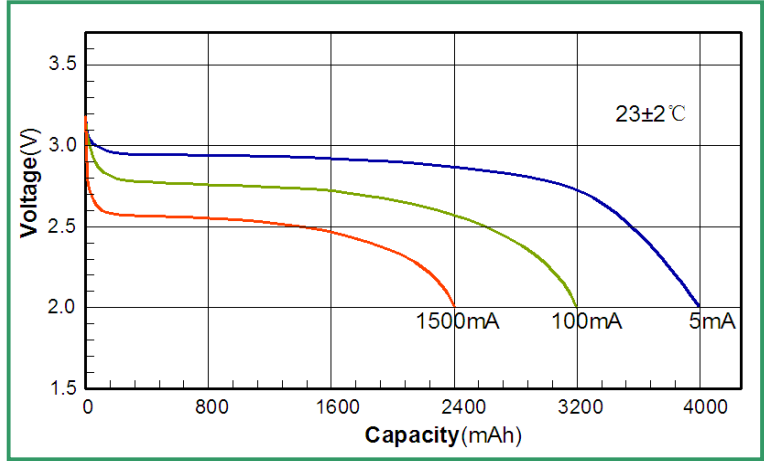

For any query please contact HCB

**HCB BATTERY CO., LTD**

Special No 1. Taizhong Avenue, Gaoqiao Industrial Park, Wujiashan Economic Development Zone, Wuhan, P.R.China.

Tel: +86 (0)27 83248452 Fax: +86 (0)27 83248455 Web : [www.cnhcb.com](http://www.cnhcb.com)