

**DESCRIPTION: 3W 1.5KVDC、3KVDC Isolated Wide Range Input Voltage DC/DC Converters**

The rated output power of TP03DA converters is 3W, the outline dimensions is "31.75*20.32*10.65", 2:1 and 4:1 wide input voltage range, the voltage range is 4.5V-9V, 9V-18V, 18V-36V, 36V-72V, 9V-36V and 18V-72VDC. The accuracy of the converter can reach $\pm 1\%$, It can be widely used in telecommunications, railway transportation, instrument and etc.

FEATURES

3W output power	2:1 and 4:1 wide input voltage range	Over load protection
31.75mm*20.32mm*10.65mm standard package	1.5KVDC、3KVDC isolation	Operating temperature: -40°C to 85°C
Metal shell packaging or plastic shell packaging	RoHS compliant	

SELECTION GUIDE

Part Number	Input Vlotage		Output		Efficiency(Typ) %	Maximum capacitive load (u F)		
	voltage (VDC)		Voltage (VDC)	Current (A)				
	Rated	Range values						
TP03DA05S05	5(2:1)	4.5-9	5	0.6	≥ 73	1000		
TP03DA05S12	5(2:1)	4.5-9	12	0.25	≥ 75	660		
TP03DA05S15	5(2:1)	4.5-9	15	0.2	≥ 75	470		
TP03DA05S24	5(2:1)	4.5-9	24	0.125	≥ 76	470		
TP03DA05D05	5(2:1)	4.5-9	± 5	± 0.3	≥ 73	± 850		
TP03DA05D12	5(2:1)	4.5-9	± 12	± 0.125	≥ 78	± 140		
TP03DA05D15	5(2:1)	4.5-9	± 15	± 0.1	≥ 79	± 47		
TP03DA12S03	12(2:1)	9-18	3.3	0.6	≥ 73	2200		
TP03DA12S05	12(2:1)	9-18	5	0.6	≥ 74	1500		
TP03DA12S12	12(2:1)	9-18	12	0.25	≥ 75	660		
TP03DA12S15	12(2:1)	9-18	15	0.2	≥ 75	470		
TP03DA12D05	12(2:1)	9-18	± 5	± 0.3	≥ 76	± 850		
TP03DA12D12	12(2:1)	9-18	± 12	± 0.125	≥ 78	± 140		
TP03DA12D15	12(2:1)	9-18	± 15	± 0.1	≥ 79	± 47		
TP03DA24S03	24(2:1)	18-36	3.3	0.6	≥ 74	2200		
TP03DA24S05	24(2:1)	18-36	5	0.6	≥ 76	1500		
TP03DA24S12	24(2:1)	18-36	12	0.25	≥ 76	660		
TP03DA24S15	24(2:1)	18-36	15	0.2	≥ 76	470		
TP03DA24D05	24(2:1)	18-36	± 5	± 0.3	≥ 78	± 850		
TP03DA24D12	24(2:1)	18-36	± 12	± 0.125	≥ 79	± 140		
TP03DA24D15	24(2:1)	18-36	± 15	± 0.1	≥ 79	± 47		
TP03DA48S03	48(2:1)	36-72	3.3	0.6	≥ 74	2200		
TP03DA48S05	48(2:1)	36-72	5	0.6	≥ 76	1500		
TP03DA48S12	48(2:1)	36-72	12	0.25	≥ 78	660		
TP03DA48S15	48(2:1)	36-72	15	0.2	≥ 78	470		
TP03DA48D05	48(2:1)	36-72	± 5	± 0.3	≥ 79	± 850		
TP03DA48D12	48(2:1)	36-72	± 12	± 0.125	≥ 79	± 140		
TP03DA48D15	48(2:1)	36-72	± 15	± 0.1	≥ 80	± 47		
TP03DA24S03W	24(4:1)	9-36	3.3	0.6	≥ 73	2200		
TP03DA24S05W	24(4:1)	9-36	5	0.6	≥ 75	1500		
TP03DA24S12W	24(4:1)	9-36	12	0.25	≥ 75	660		
TP03DA24S15W	24(4:1)	9-36	15	0.2	≥ 75	470		
TP03DA24D05W	24(4:1)	9-36	± 5	± 0.3	≥ 77	± 850		
TP03DA24D12W	24(4:1)	9-36	± 12	± 0.125	≥ 78	± 140		
TP03DA24D15W	24(4:1)	9-36	± 15	± 0.1	≥ 78	± 47		
TP03DA48S05W	48(4:1)	18-72	5	0.6	≥ 75	1500		
TP03DA48S12W	48(4:1)	18-72	12	0.25	≥ 77	660		
TP03DA48S15W	48(4:1)	18-72	15	0.2	≥ 77	470		
TP03DA48D05W	48(4:1)	18-72	± 5	± 0.3	≥ 78	± 850		
TP03DA48D12W	48(4:1)	18-72	± 12	± 0.125	≥ 78	± 140		
TP03DA48D15W	48(4:1)	18-72	± 15	± 0.1	≥ 79	± 47		

3KVDC isolation with /3H at the end of the part number. for example TP03DA24S05W/3H; 3KVDC isolated parts only can make with plastic shell packaging.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

GENERAL CHARACTERISTICS

parameter	Test conditions	Min	Typ	Max	Units
Isolation voltage	Input to Output			1500、3000	VDC
Isolation resistance	Input to Output	100M			ohm
Seismic	10~55Hz		5		G
MTBF	MIL-HDBK-217F2			5 x 10 ⁵	hrs
Over-current protection mode	Full input range			Auto recovery	
Cooling			Free air convection		
Case material			Metal shell packaging or plastic shell packaging		

INPUT CHARACTERISTICS

parameter	Test conditions	Min	Typ	Max	Units
Input voltage	5V Input module(4.5V -9V)	4.5	5	9	VDC
Input voltage	12V Input module(9V -18V)	9.5	12	18	VDC
Input voltage	24V Input module(18V-36V)	18	24	36	VDC
Input voltage	48V Input module(36V-72V)	36	48	72	VDC
Input voltage	24V Input module(9V -36V)	9.5	24	36	VDC
Input voltage	48V Input module(18V-72V)	18	48	72	VDC
Start rising time	Input rising time from 5%-100%	20			ms

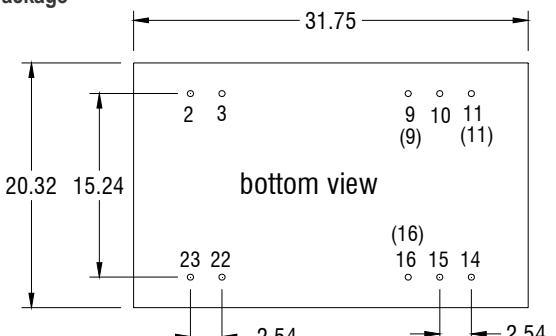
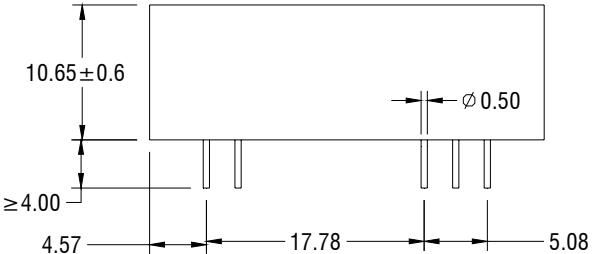
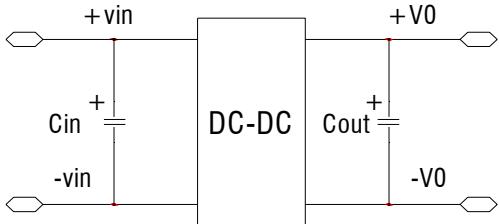
OUTPUT CHARACTERISTICS

Parameter	Test conditions	Min	Typ	Max	Units
Voltage accuracy	$I_o=0.1\cdots1.0 \times I_{on}$ $V_i=V_i$ rated			±1	%
Line regulation	$V_{min} \leq V_i \leq V_{max}$			±0.2	%
Load regulation	$I_o=0.1\cdots1.0 \times I_{on}$ $V_{min} \leq V_i \leq V_{max}$			±0.5	%
Auxiliary voltage accuracy	Main Load and auxiliary load differ 25%,the auxiliary circuit of the load with at least 25%, the main circuit with full load			±3	%
Ripple and noise	20MHz bandwidth			±1	%
Over-current protection	$V_{min} \leq V_i \leq V_{max}$	120			%
Transient recovery time	25% load change			±5	%
Transient overshoot range	25% load change			400	us
Switch frequency	$V_{min} \leq V_i \leq V_{max}$	100			KHz

ENVIRONMENT CHARACTERISTICS

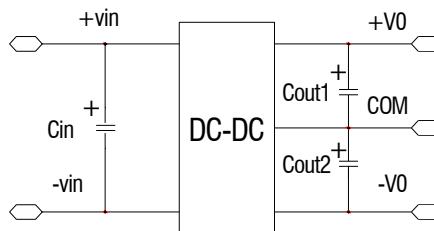
Parameter	Test conditions	Min	Typ	Max	Units
Storage Humidity	Non condensing	5		+95	%
Operating Temperature	Power derating (above 71°C)	-40		+85	°C
Storage Temperature		-55		+125	°C
Max. Case Temperature	Operating Temperature curve range			105	°C
Lead Temperature	1.5mm from case for 10 seconds			300	°C
Cooling			Free air convection		

- Case temperature under shall not exceed the maximum case temperature level.

MECHANICAL DIMENSIONS		PIN CONNECTIONS																																											
DIP Package																																													
																																													
		<table border="1"> <thead> <tr> <th>Pin</th><th>Single Output</th><th>Dual Output</th></tr> </thead> <tbody> <tr> <td>2</td><td>-Vin</td><td>-Vin</td></tr> <tr> <td>3</td><td>-Vin</td><td>-Vin</td></tr> <tr> <td>9</td><td>NC</td><td>/</td></tr> <tr> <td>(9)</td><td>/</td><td>Com</td></tr> <tr> <td>10</td><td>NC</td><td>NC</td></tr> <tr> <td>11</td><td>NC</td><td>/</td></tr> <tr> <td>(11)</td><td>/</td><td>-Vout</td></tr> <tr> <td>14</td><td>+Vout</td><td>+Vout</td></tr> <tr> <td>15</td><td>NC</td><td>NC</td></tr> <tr> <td>16</td><td>-Vout</td><td>/</td></tr> <tr> <td>(16)</td><td>/</td><td>Com</td></tr> <tr> <td>22</td><td>+Vin</td><td>+Vin</td></tr> <tr> <td>23</td><td>+Vin</td><td>+Vin</td></tr> </tbody> </table>		Pin	Single Output	Dual Output	2	-Vin	-Vin	3	-Vin	-Vin	9	NC	/	(9)	/	Com	10	NC	NC	11	NC	/	(11)	/	-Vout	14	+Vout	+Vout	15	NC	NC	16	-Vout	/	(16)	/	Com	22	+Vin	+Vin	23	+Vin	+Vin
Pin	Single Output	Dual Output																																											
2	-Vin	-Vin																																											
3	-Vin	-Vin																																											
9	NC	/																																											
(9)	/	Com																																											
10	NC	NC																																											
11	NC	/																																											
(11)	/	-Vout																																											
14	+Vout	+Vout																																											
15	NC	NC																																											
16	-Vout	/																																											
(16)	/	Com																																											
22	+Vin	+Vin																																											
23	+Vin	+Vin																																											
Units: mm Pin diameter tolerances: ±0.1mm General Tolerance: ±0.5mm																																													
MODEL SELECTION																																													
RECOMMEND CIRCUIT:																																													
Single Output: 																																													

RECOMMEND CIRCUIT:

Dual Output:



- Add input capacitance C_{in} is helpful to improve the electromagnetic compatibility, recommend C_{in} use 47 μF -100 μF of the electrolytic capacitors.
- If the module connect to the digital circuits, please add the C_{out} , C_{out1} 、 C_{out2} .
- If C_{out} , C_{out1} 、 C_{out2} value is too high or lower ESR, it will cause the module unstable,
- The recommended value of C_{out} , C_{out1} 、 C_{out2} should be 100 $\mu F/A$, the current here means the output current.

USING ATTENTIONS

- Module will cause irreversible damage when in the state of the input reverse polarity.
- Module will cause irreversible damage when in the long-term overload conditions.
- Module will cause irreversible damage when out of the maximum input voltage range.