


Technical Specification







EIA WR	WR51
Frequency Range(GHz)	15.0 – 22.0
Insertion Loss(dB)	0.29 Max.
VSWR	1.25:1 Max.
Flange	FBP180(UBR180)
Connector	SMA-Female or SMA-Male
Average Power(W CW)	50 Max.
Peak Power(KW)	3
Material	Cu
Size(mm)	27 x 30.2 x 32.7
Net Weight(Kg)	0.08 Around

Outline Drawing (Size: mm)


51WCAS_Cu (With SMA-Female Output)

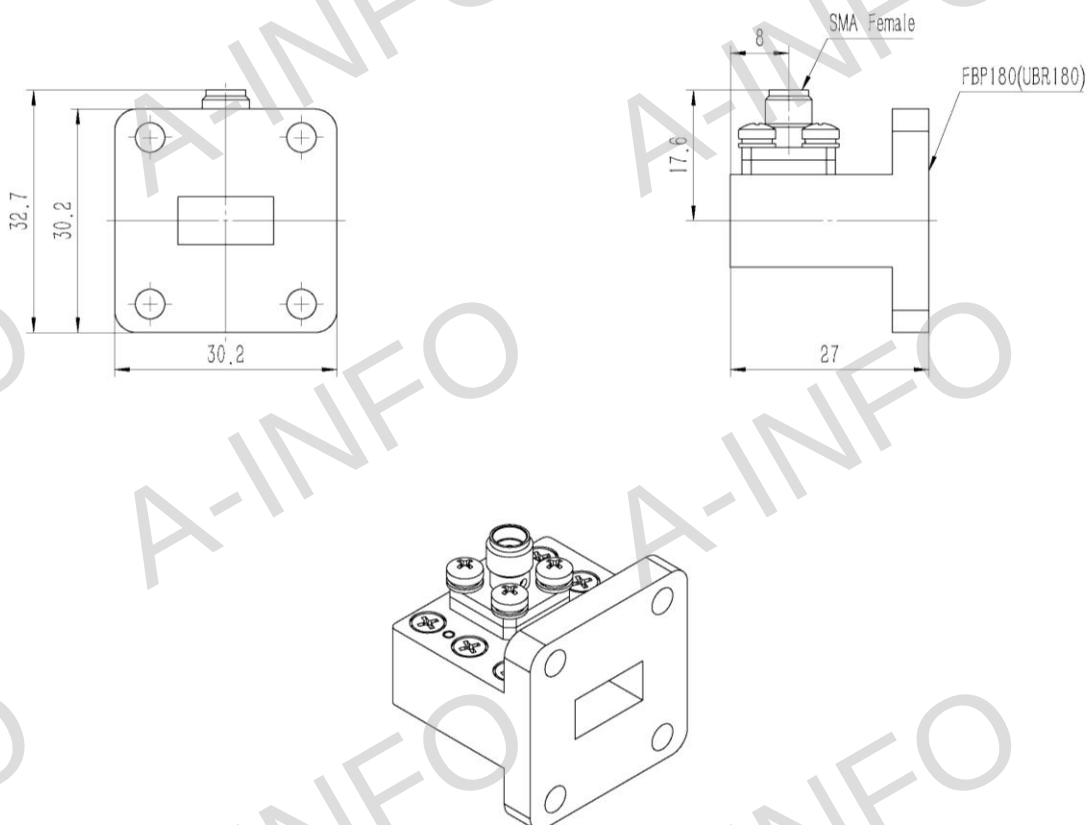

51WCASM_Cu (With SMA-Male Output)

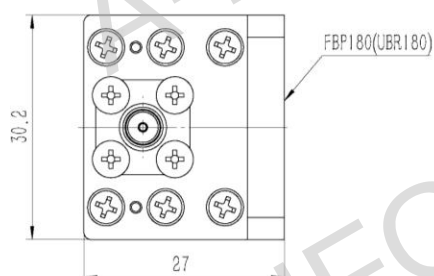


Flange Drawing (Size: mm)

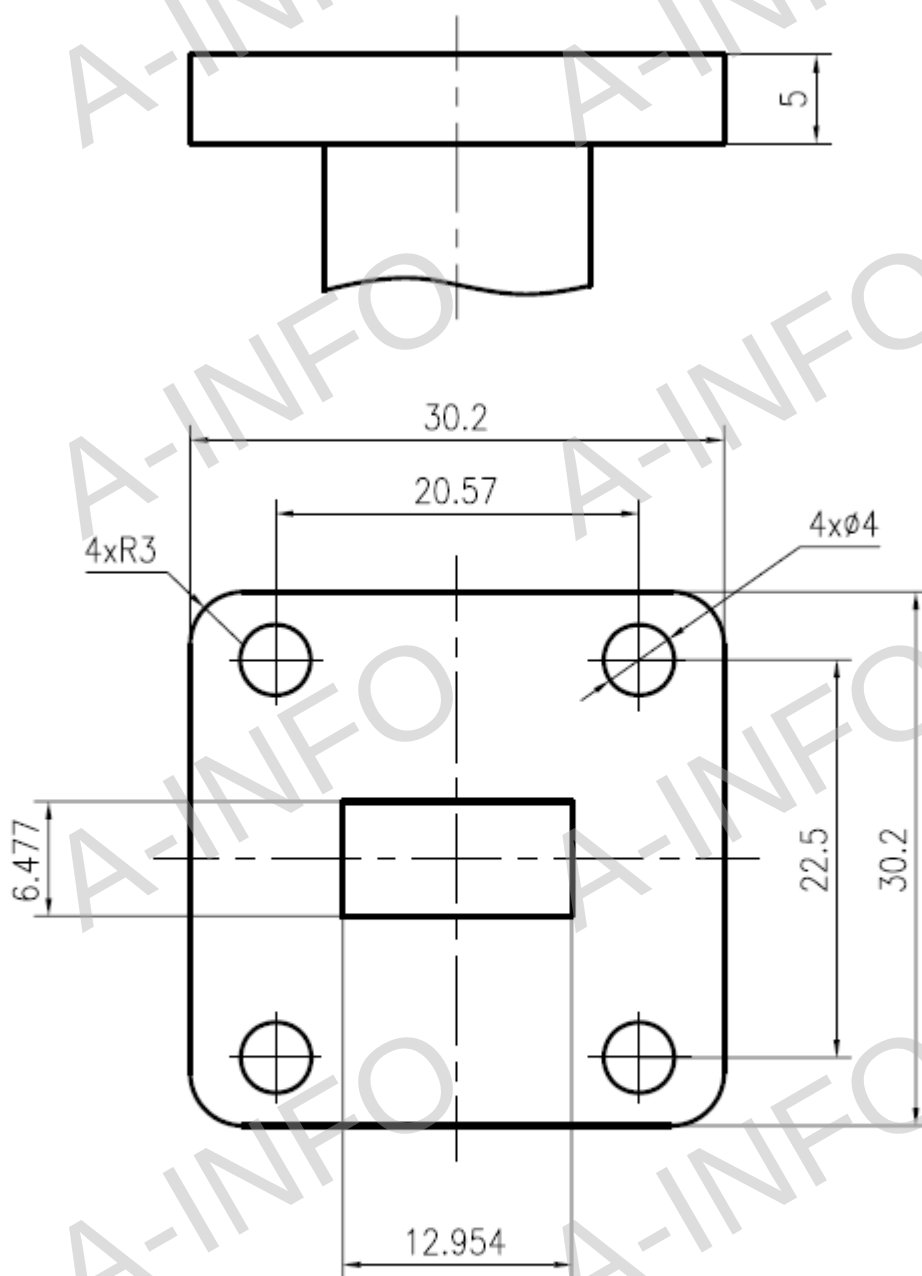

FBP180

Test Results

I. L. (Test with two adapters back to back)

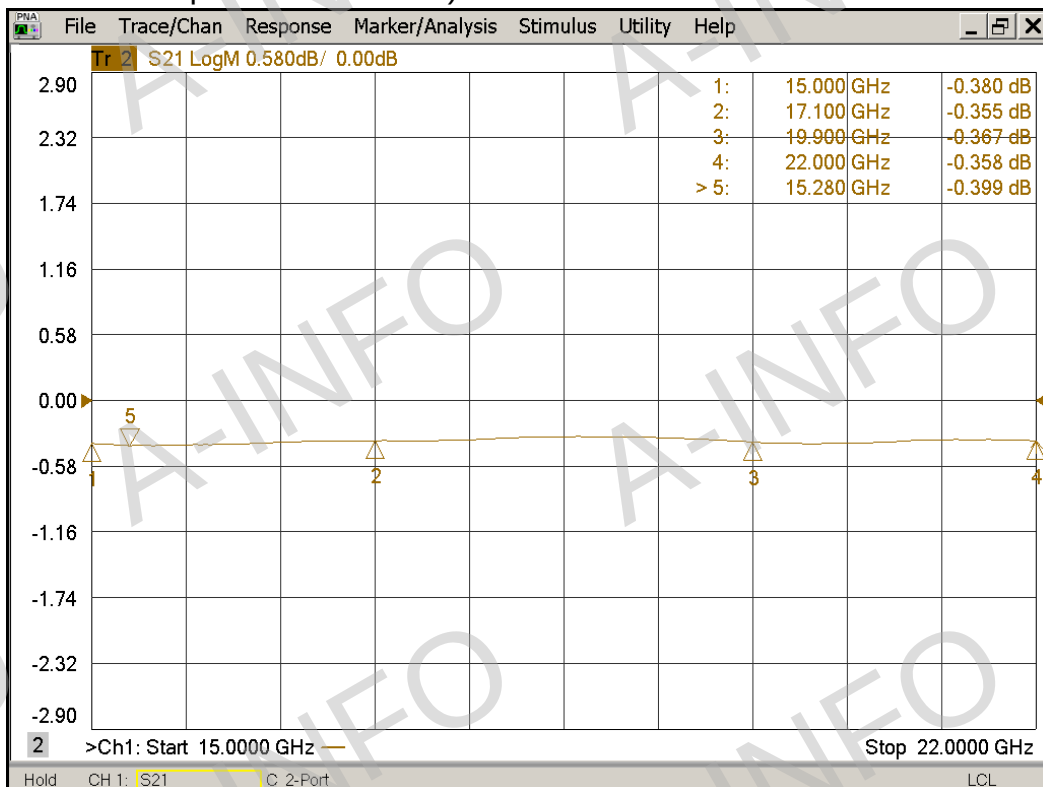

VSWR

