



650V/10A Silicon Carbide Power Schottky Barrier Diode

Features

- Zero reverse recovery current
- Zero forward recovery voltage
- Temperature independent switching behavior
- High temperature operation
- High frequency operation


Key Characteristics		
V_{RRM}	650	V
$I_F, T_c \leq 154^\circ\text{C}$	10	A
Q_c	36	nC

Benefits

- Unipolar rectifier
- Substantially reduced switching losses
- No thermal run-away with parallel devices
- Reduced heat sink requirements

Applications

- SMPS, e.g., CCM PFC;
- Motor drives, Solar application, UPS, Wind turbine, Rail traction, EV/HEV



Part No.	Package Type	Marking
G3S06510J	TO-220ISO	G3S06510J

Maximum Ratings

Parameter	Symbol	Test Condition	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}		650	V
Surge Peak Reverse Voltage	V_{RSM}		650	
DC Blocking Voltage	V_{DC}		650	
Continuous Forward Current	I_F	$T_C=25^{\circ}\text{C}$ $T_C=125^{\circ}\text{C}$ $T_C=154^{\circ}\text{C}$	32.5 17.2 10	A
Repetitive Peak Forward Surge Current	I_{FRM}	$T_C=25^{\circ}\text{C}$, $t_p=10\text{ms}$, Half Sine Wave, $D=0.3$	50	A
Non-repetitive Peak Forward Surge Current	I_{FSM}	$T_C=25^{\circ}\text{C}$, $t_p=10\text{ms}$, Half Sine Wave	120	A
Power Dissipation	P_{TOT}	$T_C=25^{\circ}\text{C}$	115	W
		$T_C=110^{\circ}\text{C}$	50	W
Operating Junction	T_j		-55°C to 175°C	$^{\circ}\text{C}$
Storage Temperature	T_{stg}		-55°C to 175°C	$^{\circ}\text{C}$
Mounting Torque		M3 Screw 6-32 Screw	1 8.8	Nm lbf-in

Thermal Characteristics


Parameter	Symbol	Test Condition	Value	Unit
			Typ.	
Thermal resistance from junction to case	$R_{th\ JC}$		1.30	$^{\circ}\text{C}/\text{W}$

Electrical Characteristics


Parameter	Symbol	Test Conditions	Numerical		Unit
			Typ.	Max.	
Forward Voltage	V_F	$I_F=10A, T_J=25^{\circ}C$	1.43	1.7	V
		$I_F=10A, T_J=175^{\circ}C$	1.64	2	
Reverse Current	I_R	$V_R=650V, T_J=25^{\circ}C$	0.5	50	μA
		$V_R=650V, T_J=175^{\circ}C$	1.4	100	
Total Capacitive Charge	Q_C	$V_R=400V, T_J=150^{\circ}C$ $Q_C = \int_0^{V_R} C(V) dV$	36	-	nC
Total Capacitance	C	$V_R=0V, T_J=25^{\circ}C, f=1MHz$	690	730	pF
		$V_R=200V, T_J=25^{\circ}C, f=1MHz$	72	75	
		$V_R=400V, T_J=25^{\circ}C, f=1MHz$	71	74	

Performance Graphs


1) Forward IV characteristics as a function of T_J :

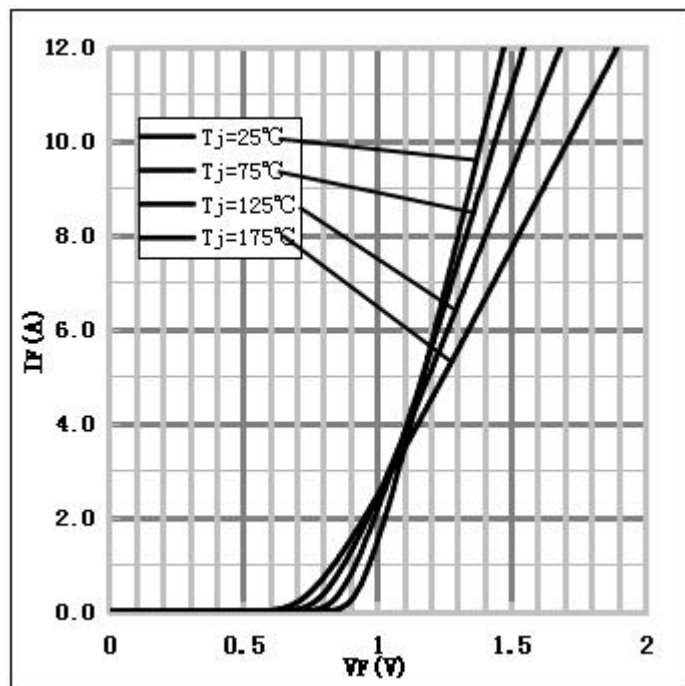



2) Reverse IV characteristics as a function of T_J :

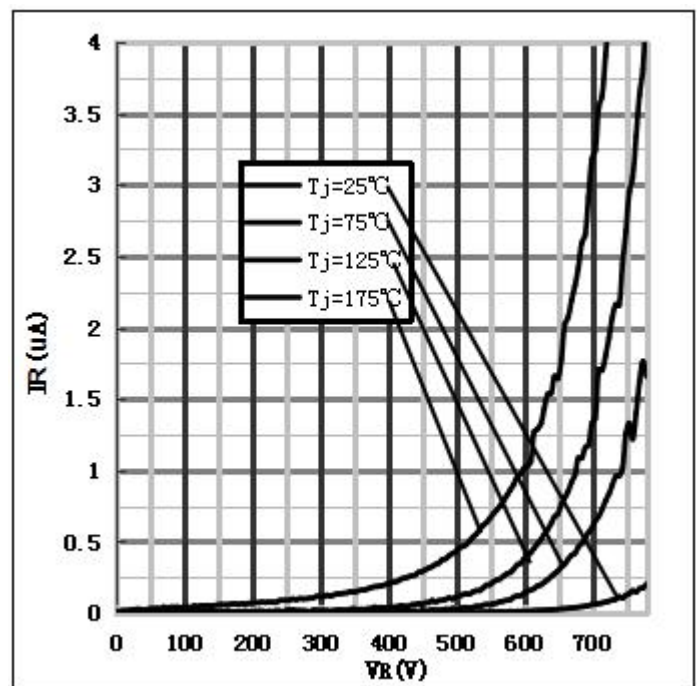

3) Current Derating:

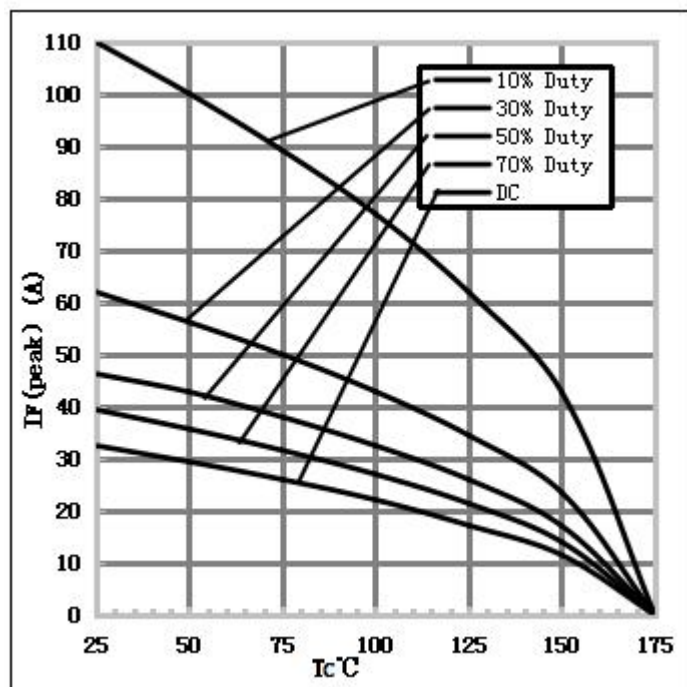

4) Capacitance vs. reverse voltage:

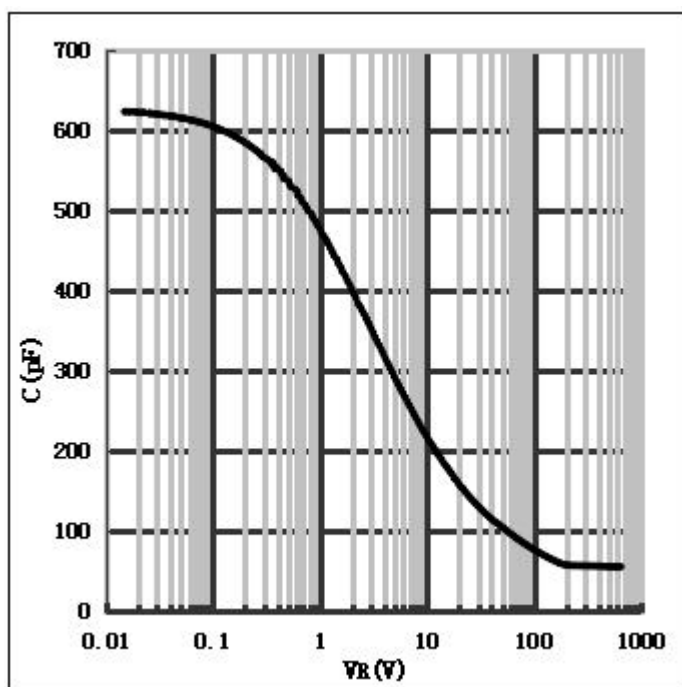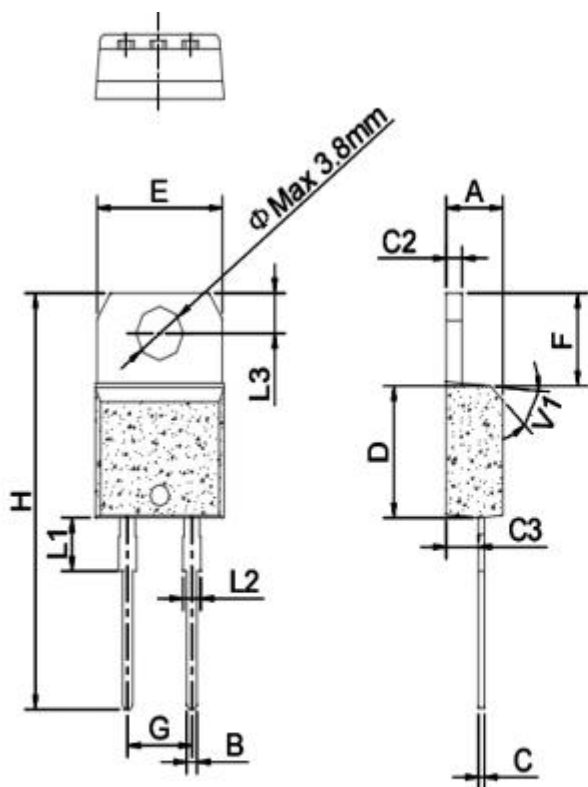Package TO-220ISO

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.80		10.4	0.386		0.409
F	6.55		6.95	0.258		0.274
G		5.08			0.2	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

Note: The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC(RoHS2). RoHS Certification and other certifications can be obtained from GPT sales representatives or GPT website: <http://globalpowertech.cn/English/index.asp>

GPT's Alibaba Online Store is available now! You can place order with one click and get direct delivery from manufacturer in short time. For more info about products and price, please reach us at:

<https://globalpowertech.en.alibaba.com/>

More product datasheets and company information can be found in:

<http://globalpowertech.cn/English/index.asp>

