

## 2J0801CF-C40G

### GNSS Active Connector Mount Antenna

#### Key Features

GPS/GLONASS/BeiDou/QZSS/Galileo

- 1561-1606 MHz

Connector Mount

28 dB Gain

Pre-Filter

Low Noise Figure

Low Power Consumption

Ground Plane Dependent

Dimensions  $\varnothing$  13.2 × 70,4 mm



## 1. Antenna and electrical specifications

Parameters	GNSS Ceramic Active Antenna		
	BeiDou	GPS/QZSS/Galileo	GLONASS
<b>Standards</b>			
<b>Bands (MHz)</b>	1561	1575	1602
<b>Frequency (MHz)</b>	1561.098	1575.42	1598-1606
<b>Passive Gain (dBi)</b>	~3.5	~3.4	~3.2
<b>Impedance (Ohms)</b>		50	
<b>Radiation Pattern</b>		Hemispherical	
<b>Voltage Range (V)</b>		1.5 - 3.6	
<b>Active Gain (dB)</b>		28 @ 2.7 V	
<b>Noise Figure (dB)</b>		1.8 @ 2.7 V	
<b>Current Consumption (mA)</b>		9 @ 2.7 V	
<b>Power Consumption (mW)</b>		24.3 @ 2.7 V	
<b>Saw Filter Type</b>		Pre-Filter	
<b>Out of Band Rejection (dB)</b>		~43	
<b>ESD Protection (kV)</b>		6	
<b>Connector Type</b>		SMA Male	


### Antenna Measurement Conditions:

Mounted on Ground Plane of 83.4 x 40.4 mm  
 Measured in Certified CTIA 3D Anechoic Chamber


## 2. Mechanical and environmental specifications

Specifications	2J0801CF-C40G
<b>Mounting Type</b>	Connector Mount
<b>Dimensions (mm)</b>	Ø 13.2 x70.4
<b>Radome</b>	TPE UV Stable
<b>Radome color</b>	Black
<b>Operating Temperature (C)</b>	-40 to +85
<b>Storage Temperature (C)</b>	-40 to +85
<b>Substance Compliance</b>	RoHS


### 3. Antenna parameters

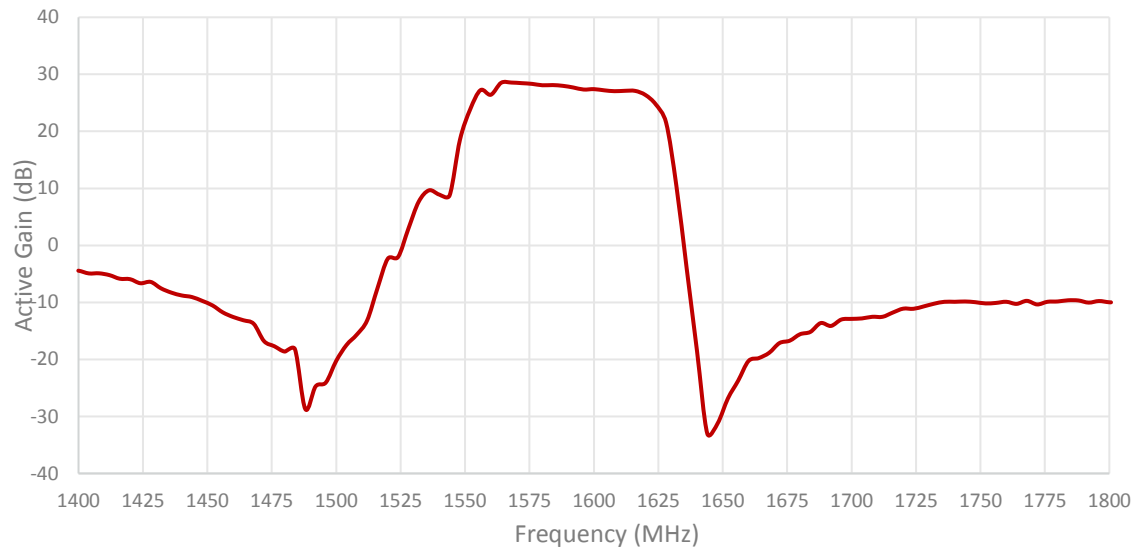


\* Measured at 3 V

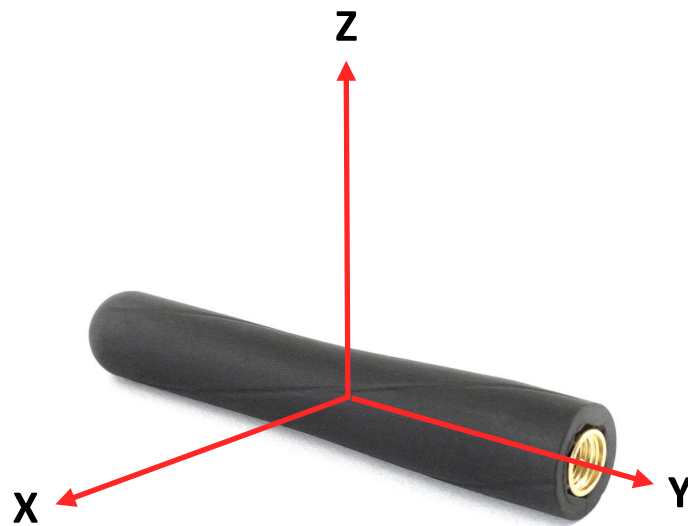


Radiation pattern reference

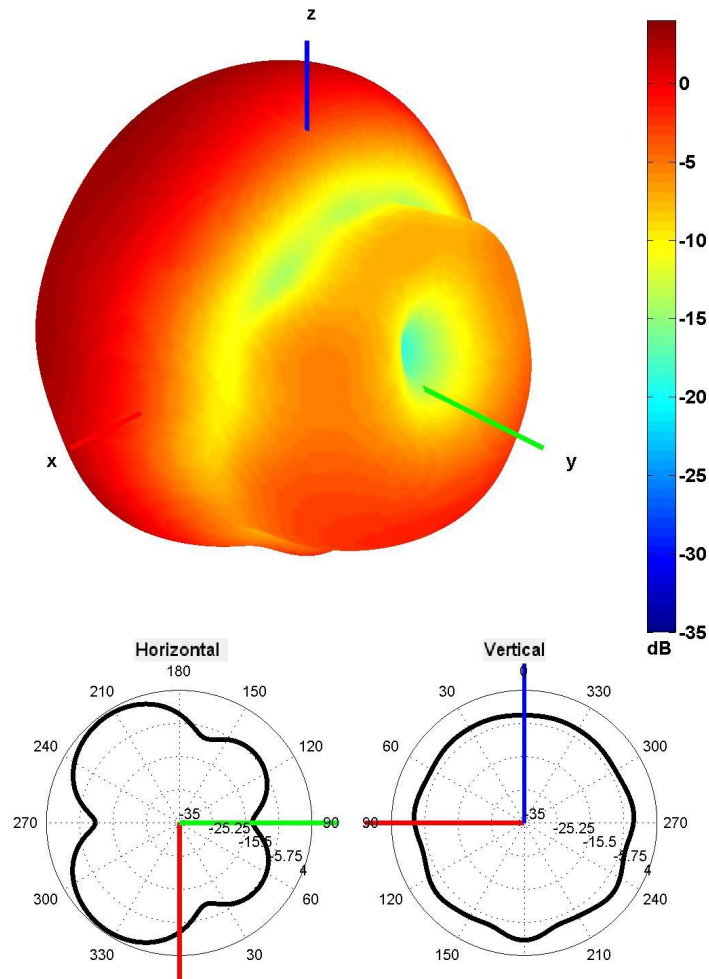

1560 MHz Radiation pattern


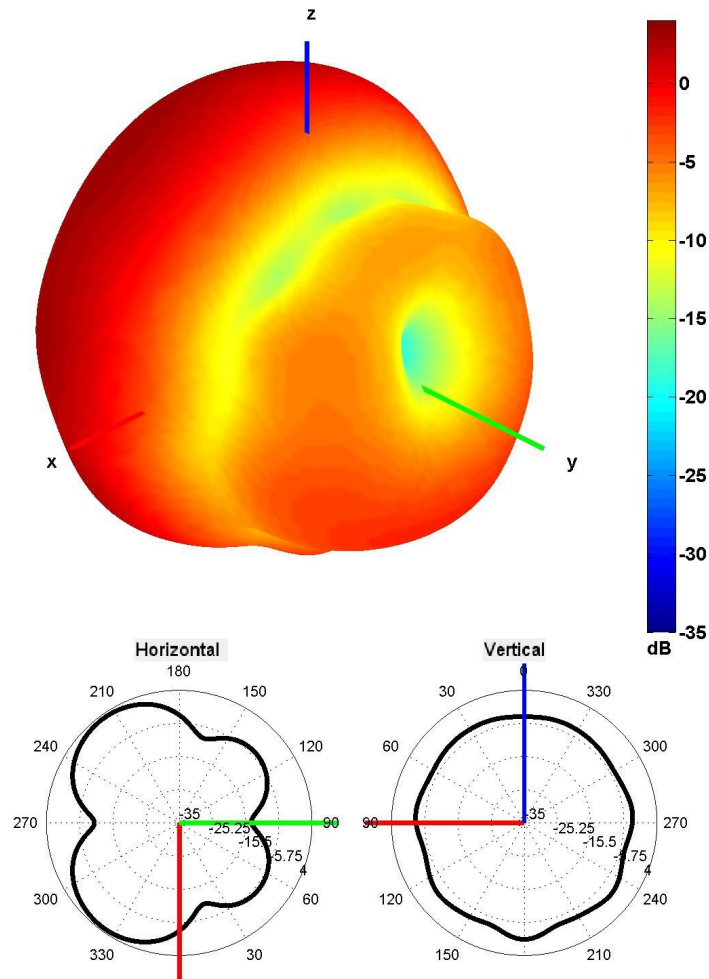


1575 MHz Radiation pattern

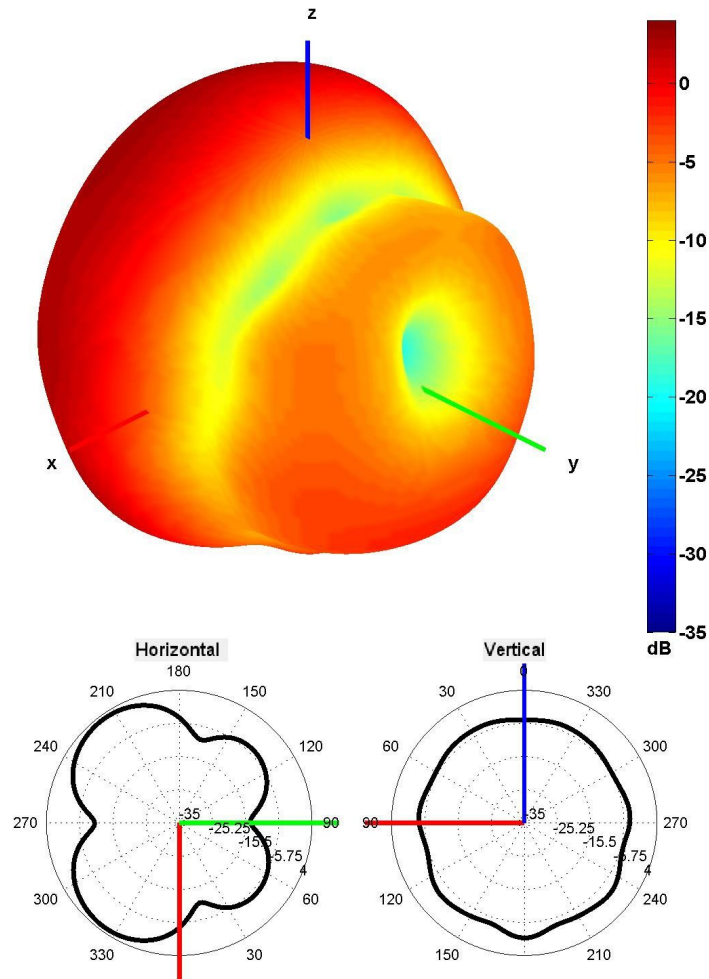

1600 MHz Radiation pattern

## 4. Antenna drawings

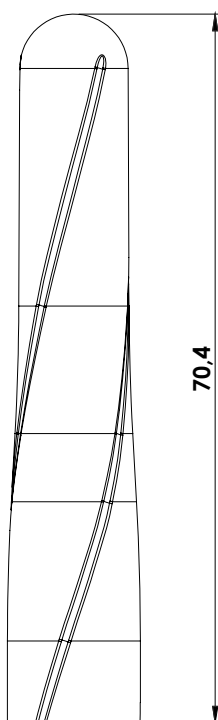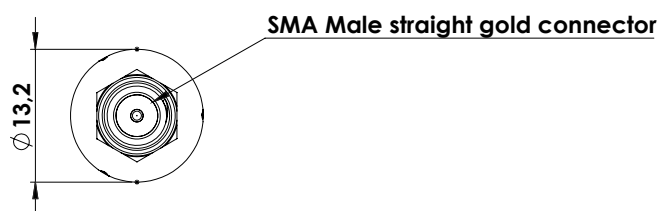

## 5. Antenna Images





## Макро Групп – это:

- дистрибьютор электронных компонентов с 1994 года
- контрактный производитель электроники с 2007 года с собственным производством в Санкт-Петербурге (компания Макро EMC, входит в ГК Макро Групп)
- поставщик полупроводниковых материалов
- комплексный поставщик электронных компонентов
- моделирование и производство полупроводниковых эпитаксиальных гетероструктур для задач оптоэлектроники

Головной офис расположен в Санкт-Петербурге. Собственные представительства в крупных промышленных городах России и стран СНГ.

## Преимущества для наших заказчиков:

- работа по тендерам с 2012 года
- оформление банковских гарантий
- отсрочки платежей
- поставка электронных компонентов по проектным ценам
- инженерная поддержка проектов заказчиков
- сертификат системы менеджмента качества ISO 9001-2015
- необходимые сертификаты и лицензии

Данный файл получен с сайта [www.macrogroup.ru](http://www.macrogroup.ru)