

TX-5060RBGW40FC120-NUVEZG-01

PRODUCT SPECIFICATION

Features:

- ◆ Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ◆ High luminous output.
- ◆ No UV.
- ◆ Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆ Red: AlInGaP
- ◆ Green: GaInN
- ◆ Blue: GaInN
- ◆ White: GaInN

Emitting Color:


- ◆ Red (R)
- ◆ Green (G)
- ◆ Blue (B)
- ◆ White (W)

Applications:

- ◆ Auxiliary lighting
- ◆ Ambient lighting
- ◆ Architectural lighting
- ◆ Entertainment lighting

Part No.	TX-5060RBGW40FC120-NUVEZG-01	Spec No.	WKF-FC0031	Page	1 of 9
----------	------------------------------	----------	------------	------	--------

Package Dimensions:

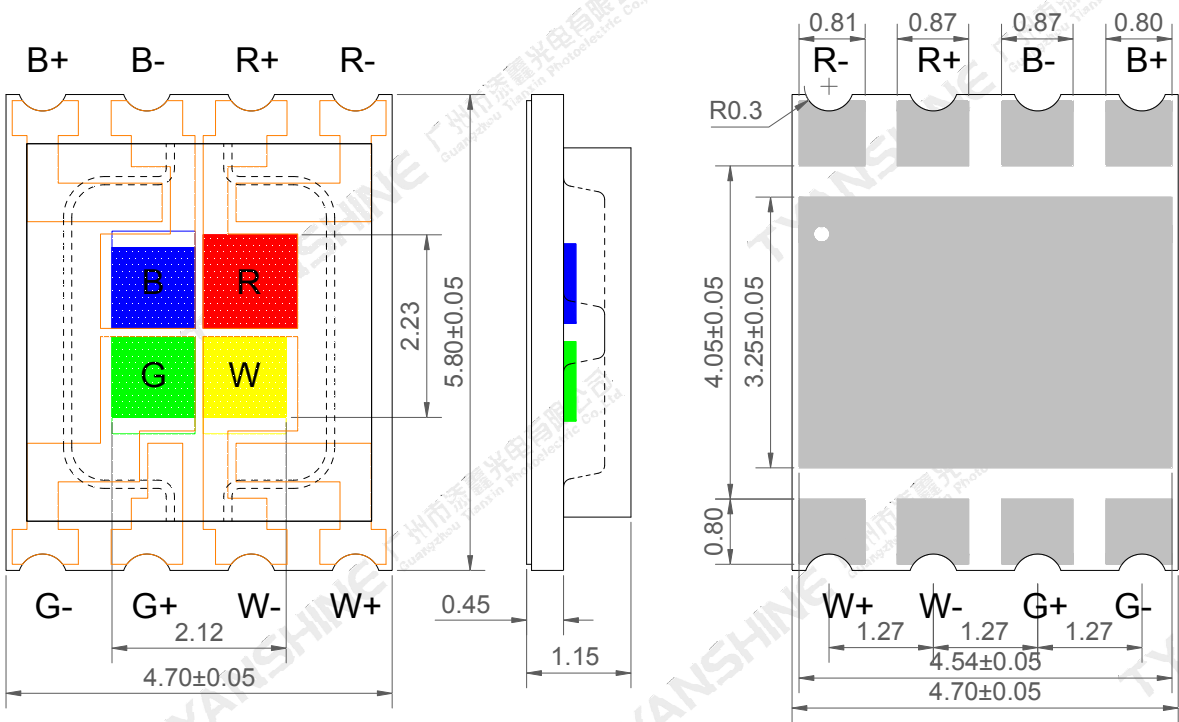

Notes:

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are ± 0.1 mm .

Absolute Maximum Ratings (Tc=25℃)

Parameter	Symbol		Ratings	Unit
Forward Current	IF	R	2.0	A
		B	2.5	
		G	2.5	
		W	2.5	
Reverse Voltage	VR		Not designed for reverse operation	V
Power Dissipation	Pd	R	6.3	W
		B	9.7	
		G	10	
		W	10	
Junction Temperature	Tj	R	115	℃
		B	150	
		G	150	
		W	150	
Electrostatic Discharge Threshold (ESD)	ESD		2000	V
Storage Temperature	Tstg		-40~+70	℃
Operation Temperature	Topr		-30~+85	

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics (Tc=25°C, IF=1.0A)

Parameter	Symbol	Emitting color	Min.	Typ.	Max.	Units
Luminous Flux	φ_v	R	100	—	130	lm
		B	35	—	45	
		G	190	—	270	
		W	270	—	300	
Forward Voltage	V_f	R	2.2	—	2.8	V
		B	2.9	—	3.6	
		G	2.9	—	3.6	
		W	2.9	—	3.6	
Dominant Wavelength	λ_d	R	615	620	625	nm
		B	447	452	457	
		G	522	527	532	
Peak-emission Wavelength	λ_p	R	625	630	635	nm
		B	442	447	452	
		G	516	521	526	
Correlated Colour Temperature	CCT	W	6000	—	7000	K
Color Rendering Index	Ra	W	—	—	—	—
Viewing Angle at 50 % IV	$2\theta_{1/2}$	—	—	120	—	Deg
			—	120	—	
Reverse Current	$V_R=5V$	R	—	—	2	μA
		B	—	—	2	
		G	—	—	2	
	—	W	Not designed for reverse operation			
Thermal Resistance Junction to Case	$R\theta_{J-C}$	—	—	0.8	—	K/W
Temperature Coefficient of Voltage	$V\Delta F/T$	R	—	-3.12	—	mV/°C
		B	—	-3.03	—	
		G	—	-7.13	—	
		W	—	-4.15	—	

Notes:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. Luminous flux measurement tolerance: $\pm 10\%$.
4. Forward voltage measurement tolerance: $\pm 3\%$.
5. Ra measurement tolerance: ± 2 .





Part No.	TX-5060RBGW40FC120-NUVEZG-01	Spec No.	WKF-FC0031	Page	4 of 9
----------	------------------------------	----------	------------	------	--------

The graph plots the ratio of the maximum value of the first-order derivative of the function to the maximum value of the function (Y-axis) against the ratio of the maximum value of the second-order derivative of the function to the maximum value of the function (X-axis). The Y-axis ranges from 0.30 to 0.36, and the X-axis ranges from 0.29 to 0.34. A red line represents the boundary, with points labeled 6000K, 6500K, 7000K, 1D, and 1A.



Region	CCT Range		X1	Y1	X2	Y2	X3	Y3	X4	Y4
	Min	Max								
1D	6000K	6500K	0.3146	0.3164	0.322	0.3319	0.3211	0.3445	0.313	0.3276
1A	6500K	7000K	0.309	0.3041	0.3147	0.3151	0.3131	0.327	0.3064	0.3136

Typical Electrical/Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

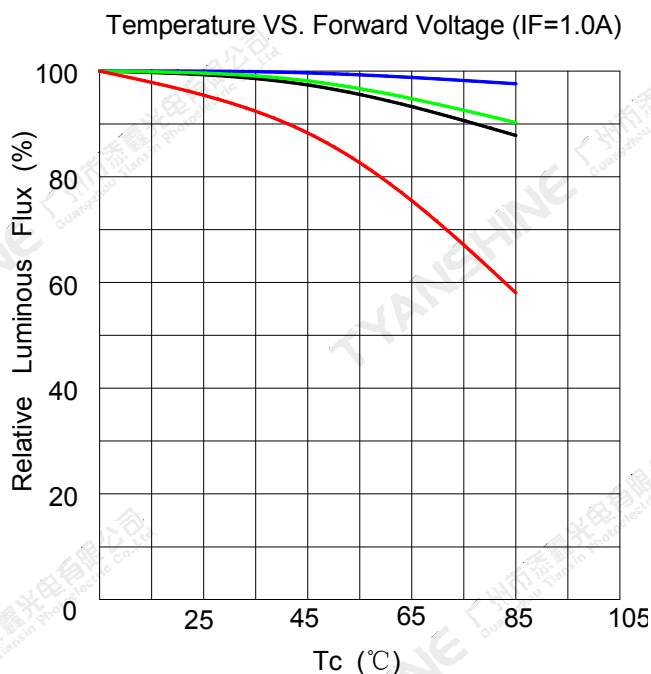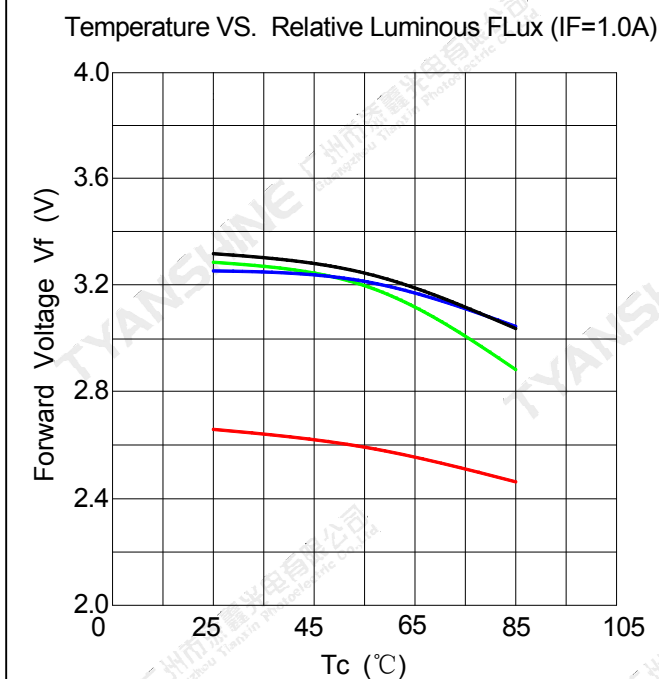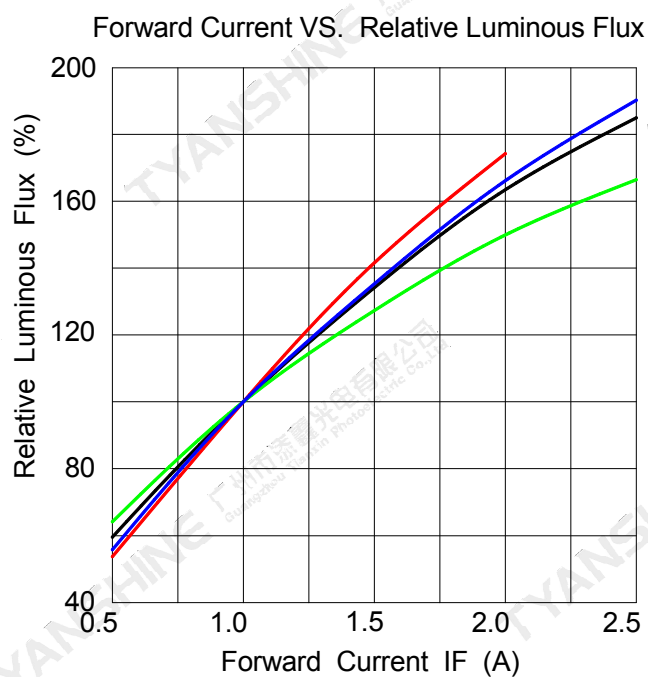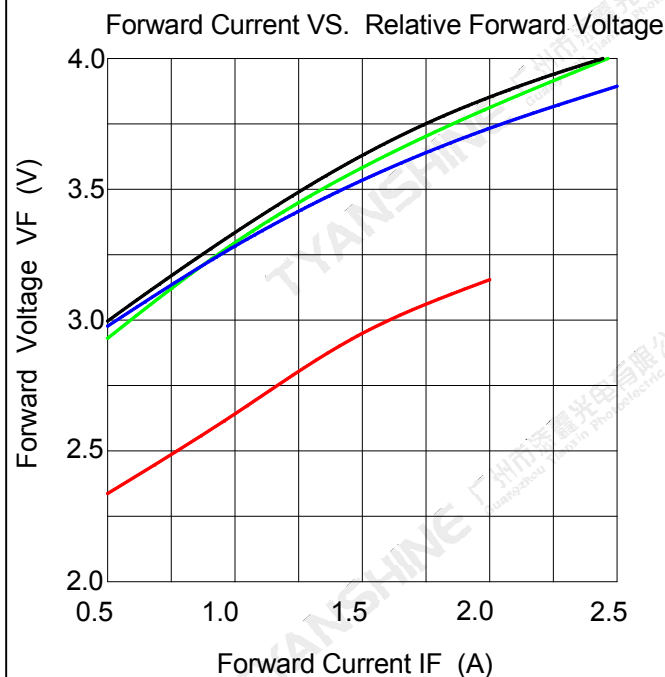

Notes: — Red (R) ; — Green (G) ; — Blue (B) ; — White (W) ;

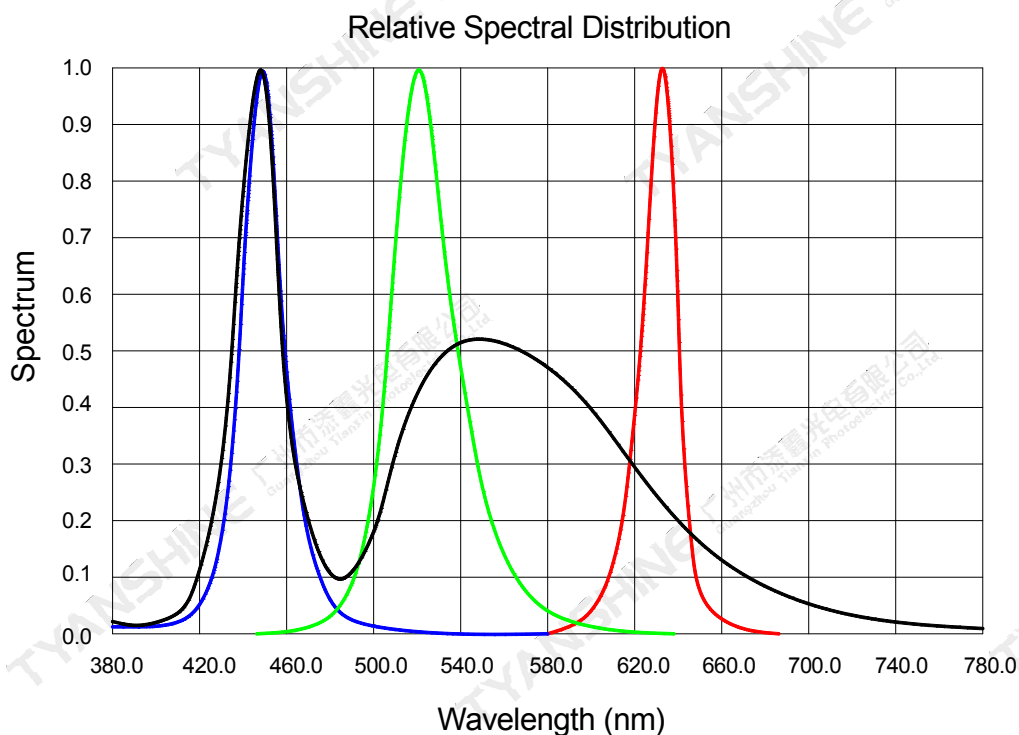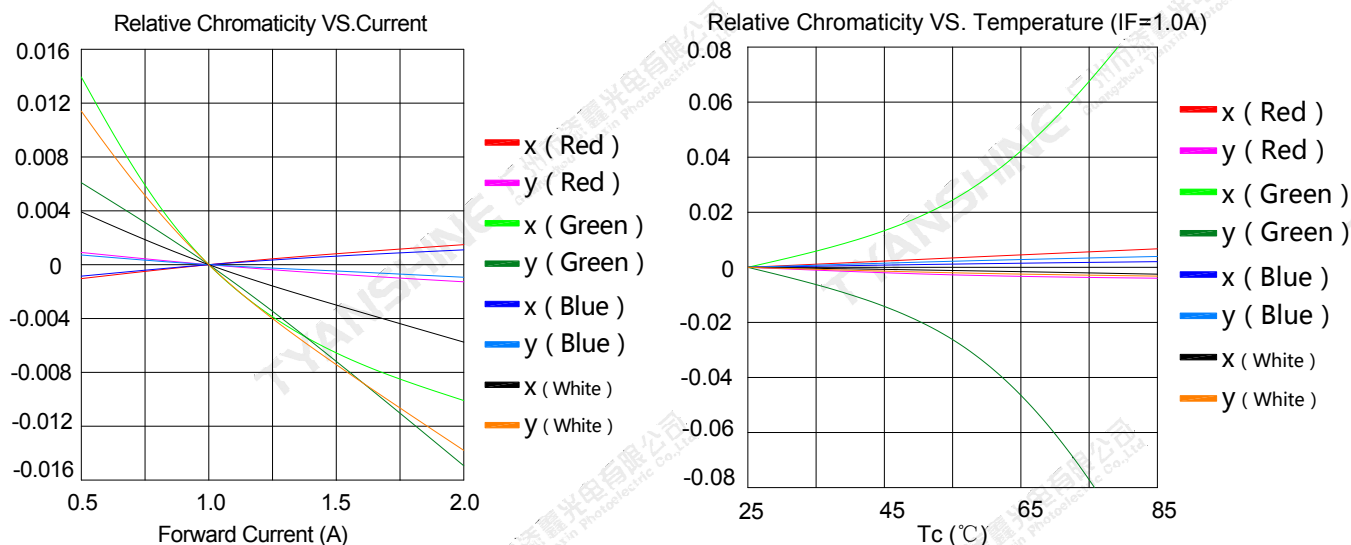

Notes: Red (R) ; Green (G) ; Blue (B) ; White (W) ;

Notes:

1. $2\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is $\pm 5^\circ$.

Usage Precautions


Storage Environment Condition

Temperature: 5°C ~ 30°C (41°F ~ 86°F)

Humidity: 60% RH Max.

Soldering Condition

Use the conditions shown to the under figure.

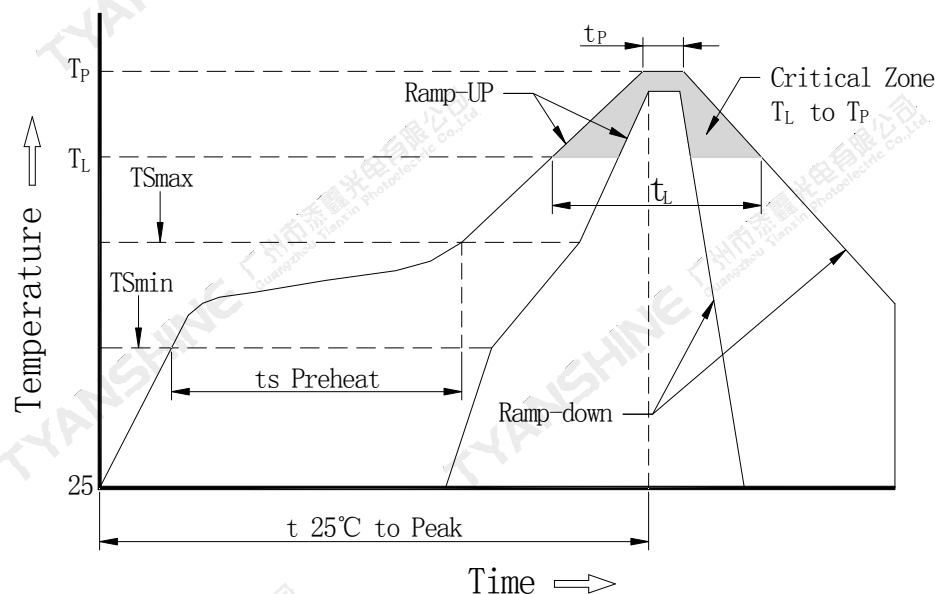



Profile Feature	Lead-Based Solder
Average Ramp-Up Rate (T_{Smax} to T_P)	3°C/second max.
Preheat: Temperature Min (T_{Smin})	100°C
Preheat: Temperature Max (T_{Smax})	150°C
Preheat: Time (T_{Smin} to T_{Smax})	60-120 seconds
Time Maintained Above: Temperature (T_L)	183°C
Time Maintained Above: Time (T_L)	60-150 seconds
Peak/Classification Temperature (T_P)	225°C
Time Within 5°C of Actual Peak Temperature (T_P)	10-30 seconds
Ramp-Down Rate	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.

Note:

All temperatures refer to topside of the package, measured on the package body surface.

Dimensions For Cannulation And Packaging

Quantity:500PCS

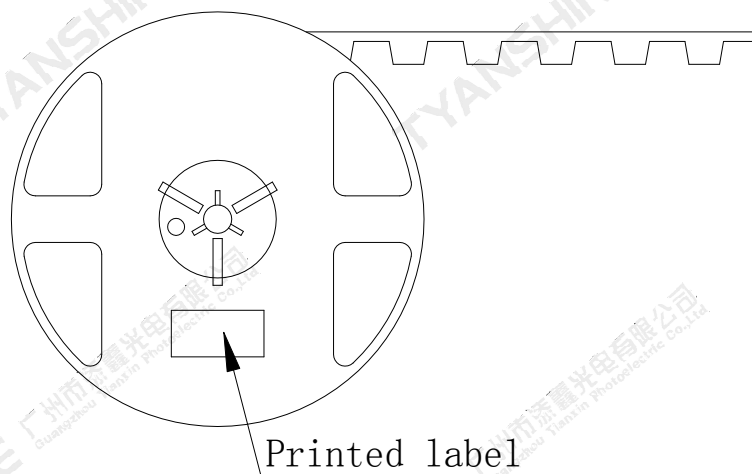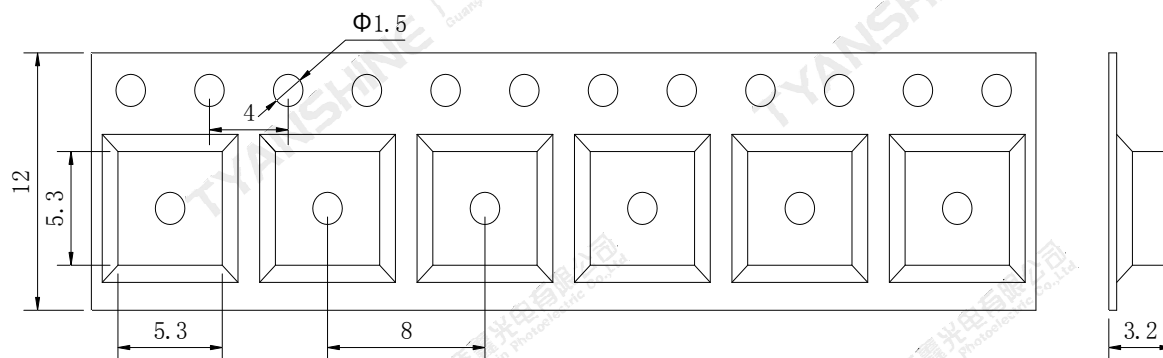**Notes:**

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.