

2JP0624P

CELLULAR / LTE Rigid Fiberglass

Key Features

CELLULAR / LTE

- 698-960 MHz
- 1710-2170 MHz
- 2500-2700 MHz

Self-Adhesive

High Performance

Ground Plane Independent

Dimensions 89.7 x 14.1 x 0.8 mm

Customizable Cable and Connector



1. Antenna and electrical specifications

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-15.1	~-12.5	~-9.0
VSWR	~1.5:1	~1.8:1	~2.1:1
Efficiency (%)	~45	~48	~48
Peak Gain (dBi)	~0.3	~1.5	~2.8
Average Gain (dB)	~-3.5	~-3.3	~-3.1
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	U.FL Standard (Other Connectors Available)		
Cable Length	150mm Standard (Any Cable Length Available)		
Cable Type	1.37mm Mini-Coax Standard (Other Cables Available)		

Antenna Measurement Conditions:

Mounted on 30 x 30 x 0.25 cm ABS Plate



150 mm of 1.37 mm Mini-Coax Cable



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2JP0624P
Mounting Type	Adhesive Mount
Dimensions (mm)	89.7 x 14.1 x 0.8
Adhesive Type	3M 467
Material	Rigid Fiberglass
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

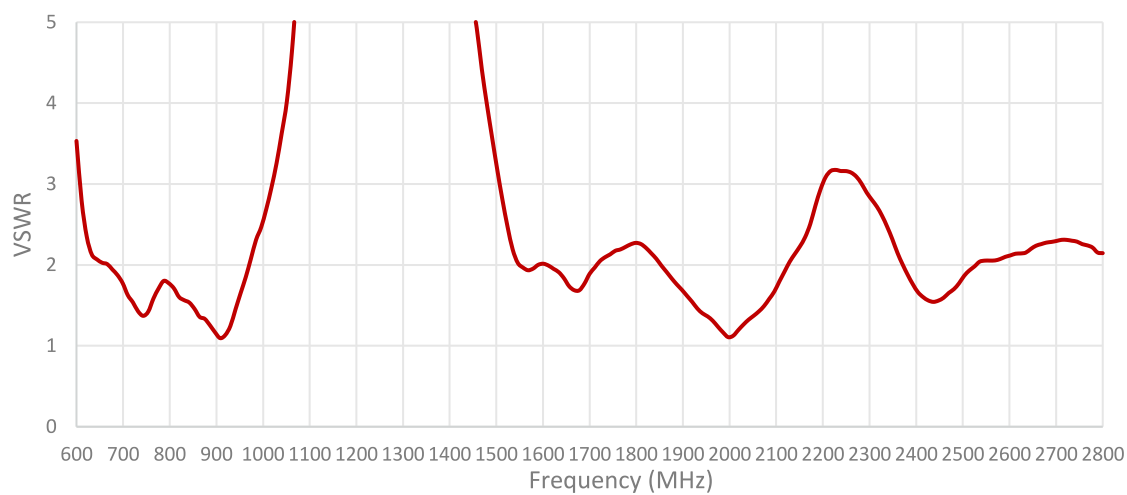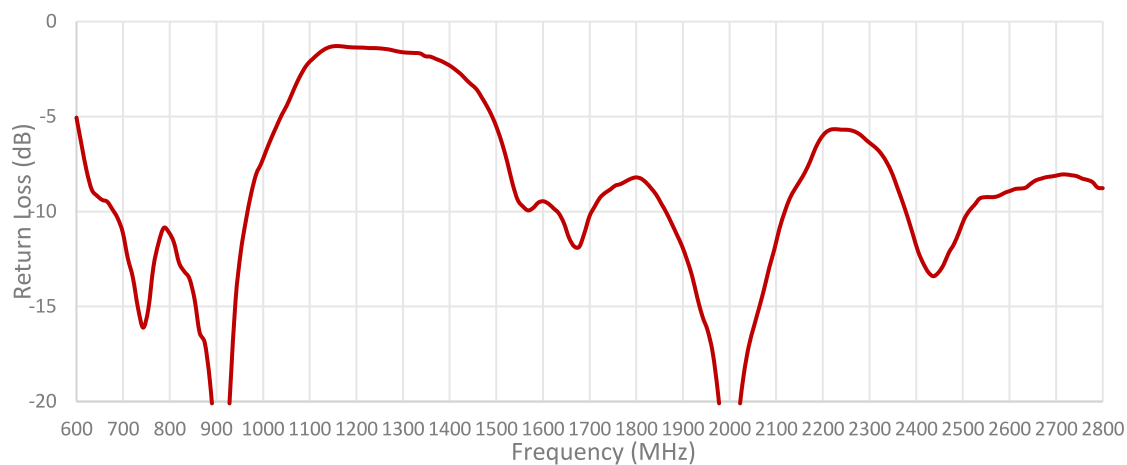

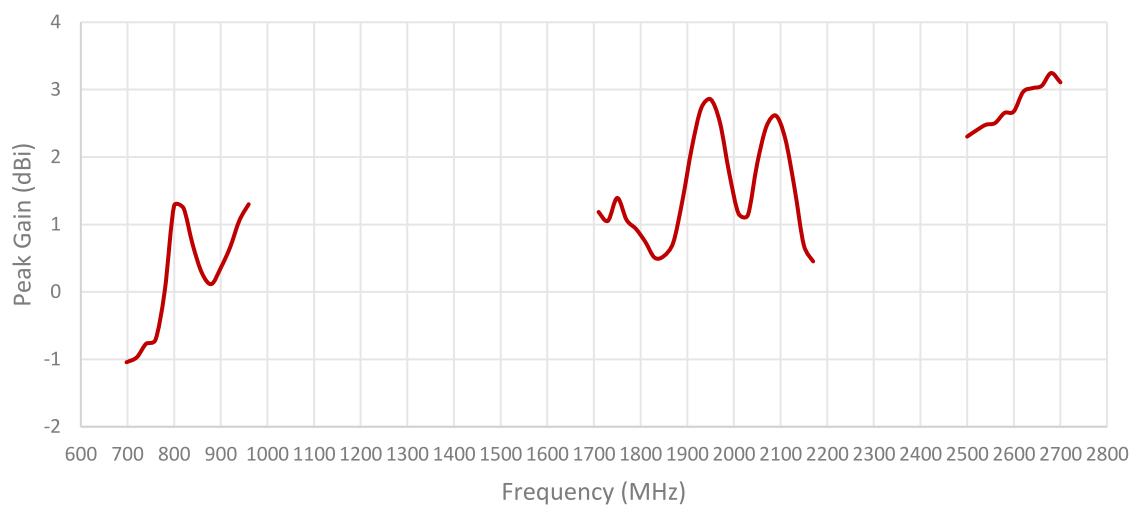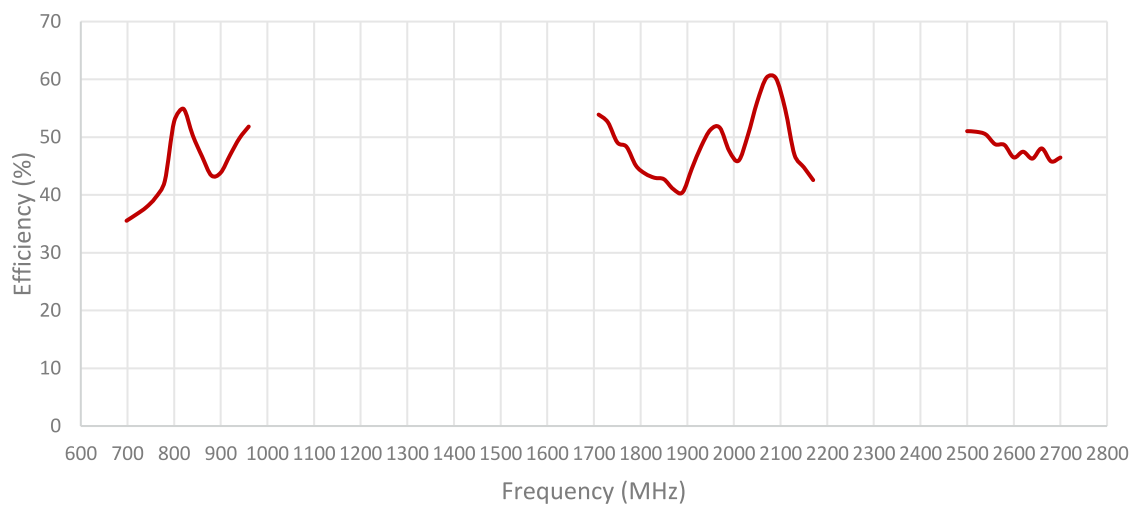


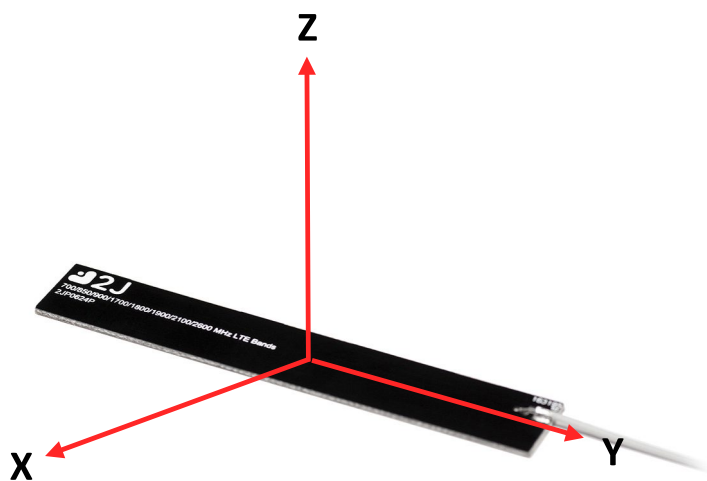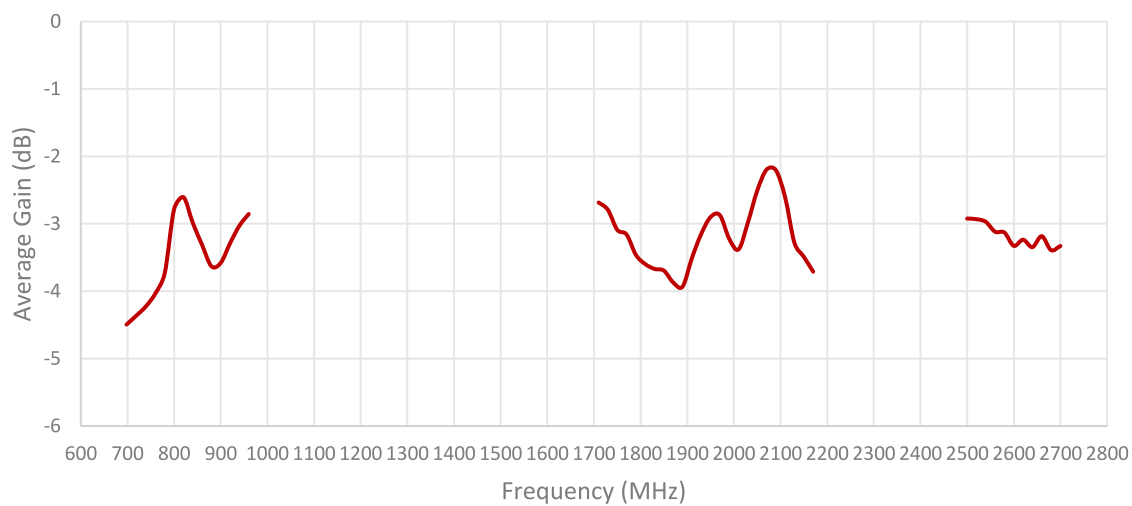


Radiation pattern reference

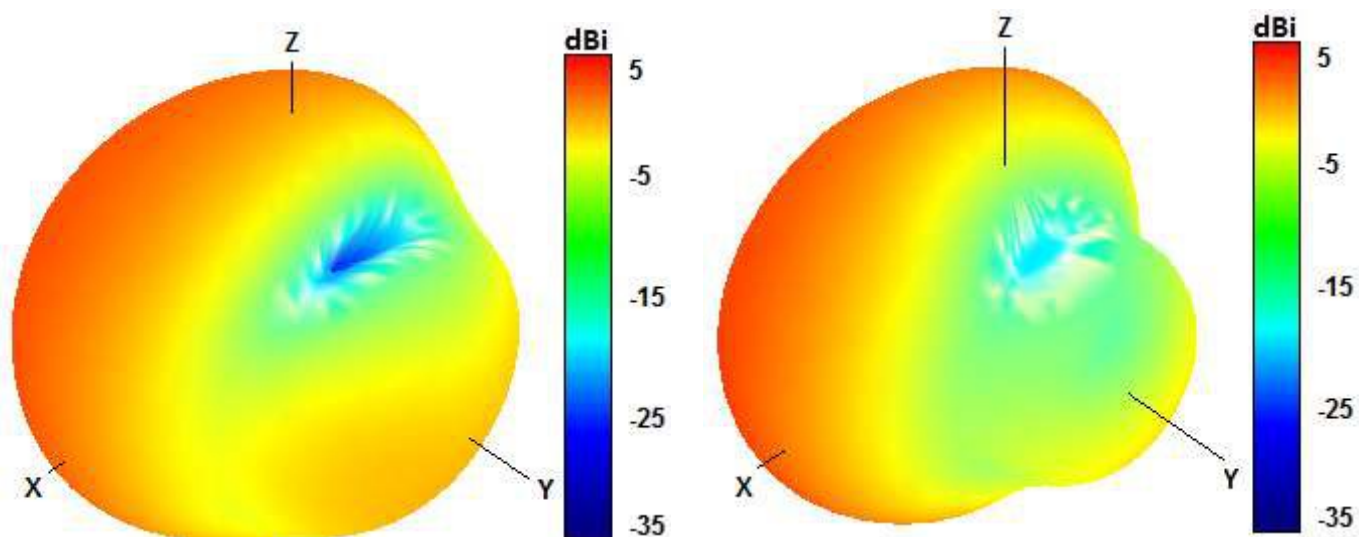


750 and 850 MHz Radiation pattern

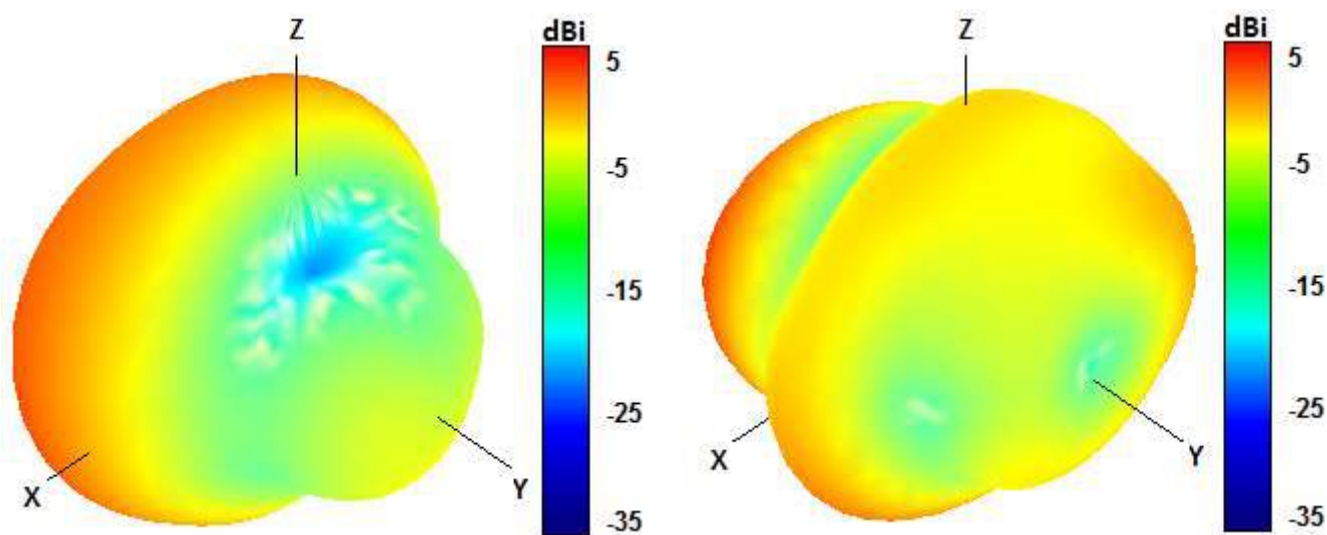

940 and 1750 MHz Radiation pattern

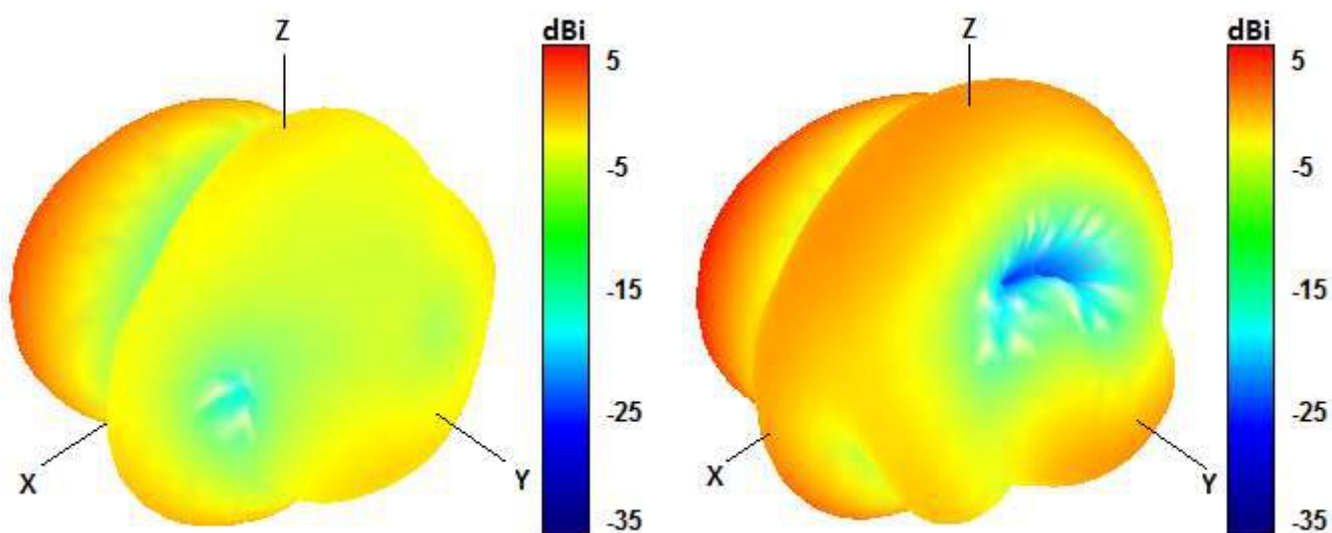


1850 and 1950 MHz Radiation pattern

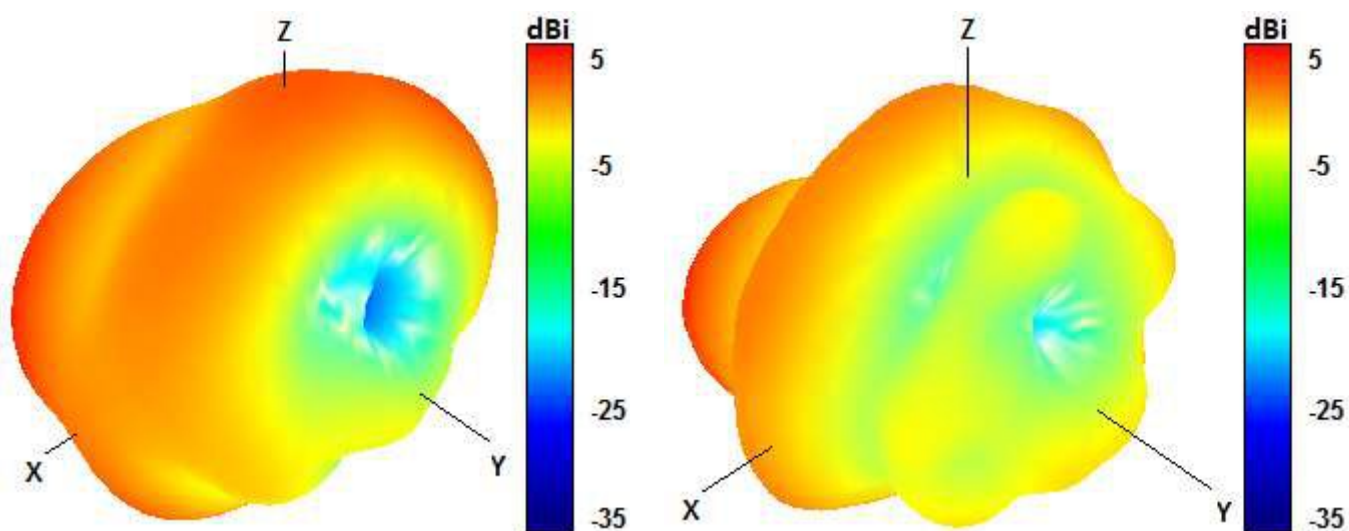

2100 and 2600 MHz Radiation pattern

4. Antenna drawings

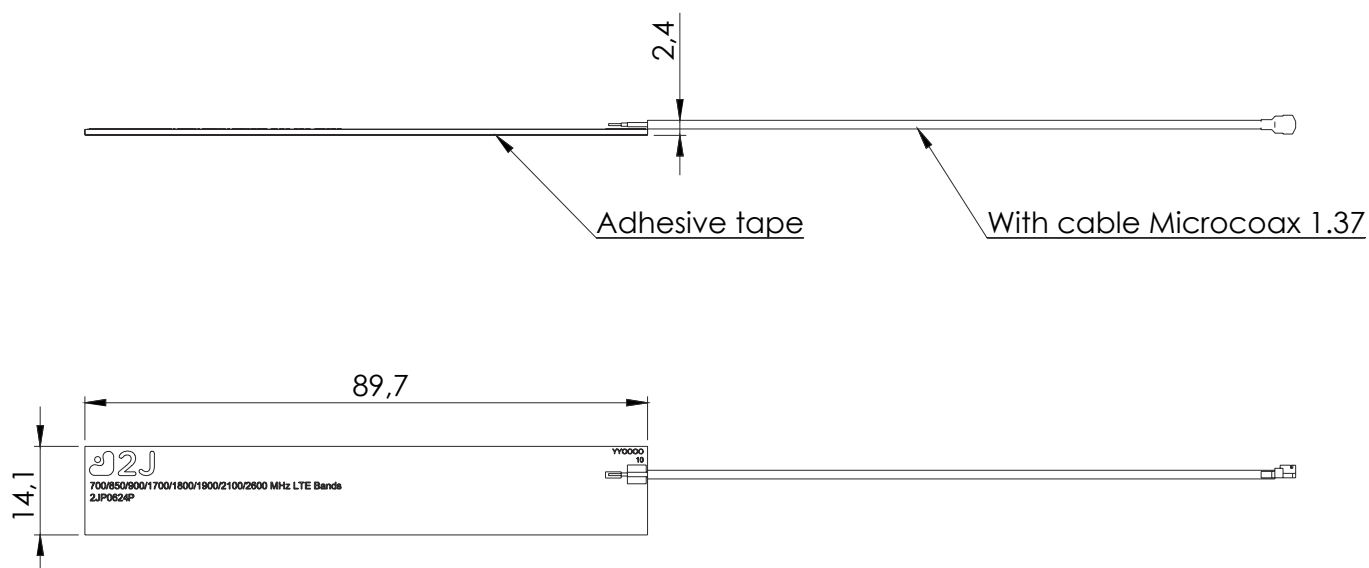

5. Antenna Images





Макро Групп – это:

- дистрибьютор электронных компонентов с 1994 года
- контрактный производитель электроники с 2007 года с собственным производством в Санкт-Петербурге (компания Макро ЕМС, входит в ГК Макро Групп)
- поставщик полупроводниковых материалов
- комплексный поставщик электронных компонентов
- моделирование и производство полупроводниковых эпитаксиальных гетероструктур для задач оптоэлектроники

Головной офис расположен в Санкт-Петербурге. Собственные представительства в крупных промышленных городах России и стран СНГ.

Преимущества для наших заказчиков:

- работа по тендерам с 2012 года
- оформление банковских гарантий
- отсрочки платежей
- поставка электронных компонентов по проектным ценам
- инженерная поддержка проектов заказчиков
- сертификат системы менеджмента качества ISO 9001-2015
- необходимые сертификаты и лицензии

Данный файл получен с сайта www.macrogroup.ru