



Front ViewSide ViewBack View

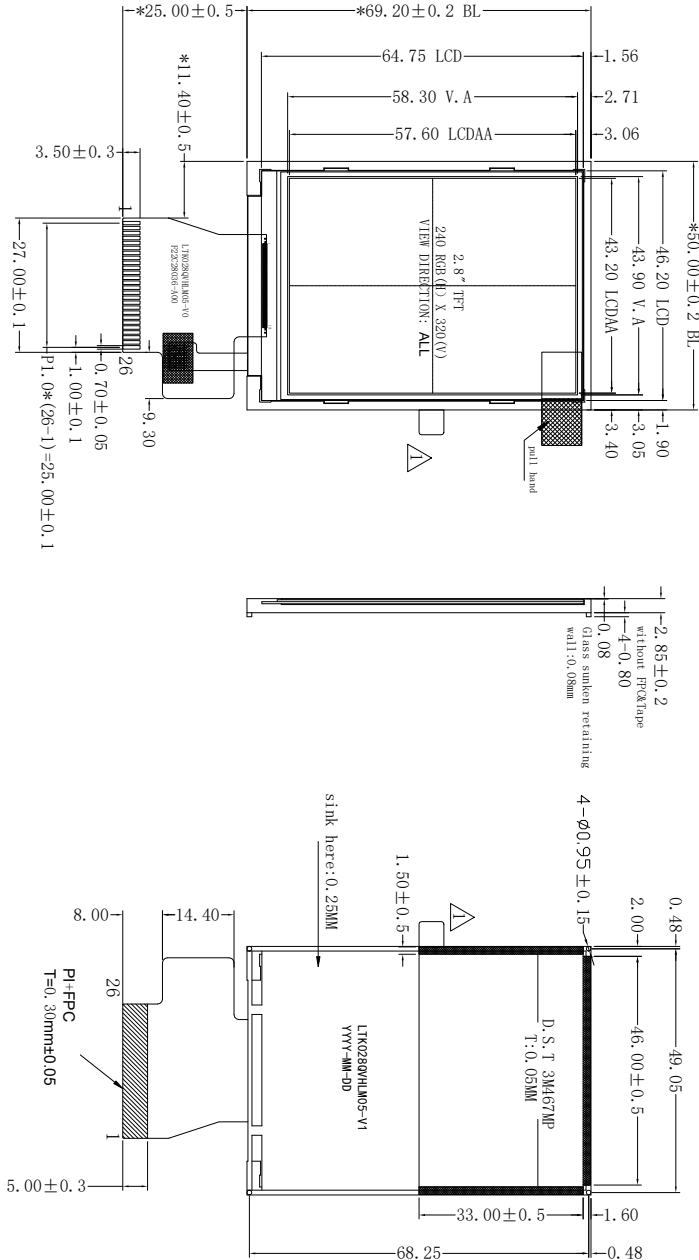

NO.	Pin Name
1	GND
2	CS
3	RS
4	WR
5	RD
6	NC
7	NC
8	NC
9	NC
10	LEDA
11	LEDK1
12	LEDK2
13	LEDK3
14	LEDK4
15	DB8
16	DB9
17	DB10
18	DB11
19	DB12
20	DB13
21	DB14
22	DB15
23	RES
24	VCC
25	VCC
26	GND

Notes:

1. Display : 2.8", QVGA TFT
2. Resolution: 240xRGBx320
3. View Direction: ALL
4. LCD Driver: S1T789V2
5. Luminance: 500/cdm² (TYP)
6. *:Critical dimension () : Reference dimension;
7. Undefinition Tolerance: ± 0.2
8. OPERATING TEMP: $-20^{\circ}\text{C}^{\sim}+70^{\circ}\text{C}$
9. STORAGE TEMP: $-30^{\circ}\text{C}^{\sim}+80^{\circ}\text{C}$
10. Requirements on Environmental Protection: ROHS



If=80ma (恒定电流测试)
VF=3.2V TYP

FPC starts shipping



LEADTEK COMPANY LIMITED

3	2	1	SCALE: 1/1	UNIT: mm	PAGE: 1/1	APPROVE	CHECK	DRAWN
2	1	0	Change the tearing position	NEW	2023.03.09	IAN		
1	0	0	NEW	2022.05.24	IAN			
REV	DESCRIPTION	DATE	NAME	CUSTOMER	NO.		JK	Ian