

2J7A24Ba

CELLULAR/LTE MIMO Screw Mount

Key Features

Cable 1 - 2: CELLULAR / LTE

- 698-960 Mhz
- 1710-2170 Mhz
- 2500-2700 Mhz

Screw Mount

Heavy Duty antenna

Lightweight Plastic Base

High Performance

Ground Plane Independent

Customizable Cable and Connector

Dimensions: Ø 96 x H 90 mm

Certificates: IP67, IP69, Ik09



1. Antenna and electrical specifications

Cable 1

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-10.6	~-16.3	~-13.9
VSWR	~2.0:1	~1.4:1	~1.5:1
Efficiency (%)	~45.1	~47.1	~46.8
Peak Gain (dBi)	~-0.9	~3.3	~4.4
Average Gain (dB)	~-3.5	~-3.3	~-3.3
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	SMA-Male Standard (Other Connectors Available)		
Cable Length	300 cm Standard (Any Cable Length Available)		
Cable Type	LL195 Standard (Other Cables Available)		

Cable 2

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-10.9	~-16.1	~-14.4
VSWR	~1.9:1	~1.4:1	~1.5:1
Efficiency (%)	~45.1	~46.6	~48.2
Peak Gain (dBi)	~-1.4	~3.0	~4.7
Average Gain (dB)	~-3.5	~-3.3	~-3.2
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	SMA-Male Standard (Other Connectors Available)		
Cable Length	300 cm Standard (Any Cable Length Available)		
Cable Type	LL195 Standard (Other Cables Available)		

Antenna Measurement Conditions:



Mounted on Metal Plate of 30 x 30 cm
 200 cm of LL195 Cable
 Measured in Certified CTIA 3D Anechoic Chamber




2. Mechanical and environmental specifications

Specifications	2J7A24Ba
Mounting Type	Screw Mount
Dimensions (mm)	Ø 96 x H 90
Max. Tighten Torque (Nm)	6 Nm
Radome	ASA
Radome color	White, Black
Antenna Base	ASA
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67, IP69, IK09



3. Antenna parameters




Table 1: CELLULAR/LTE

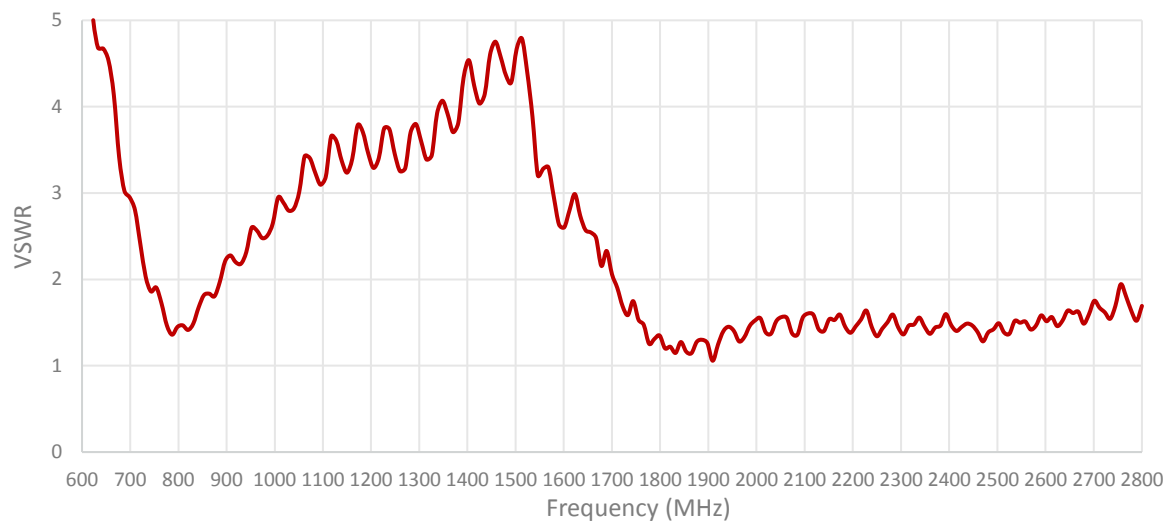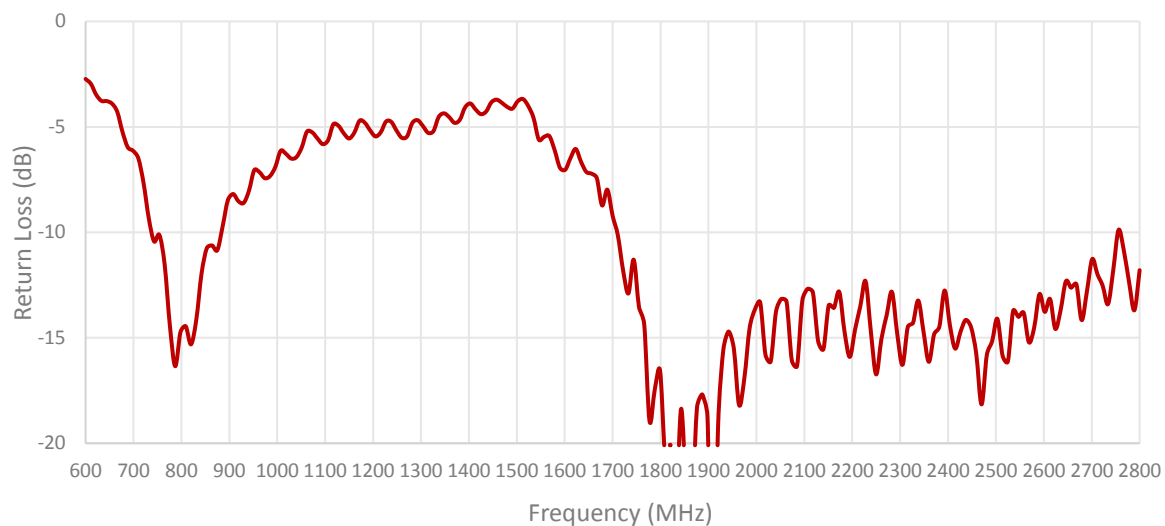

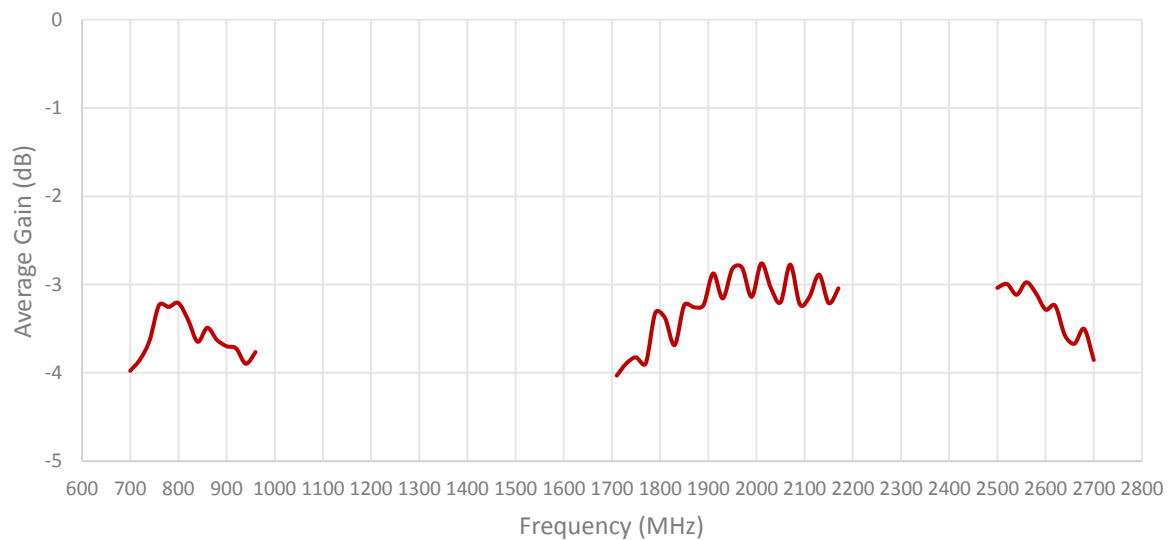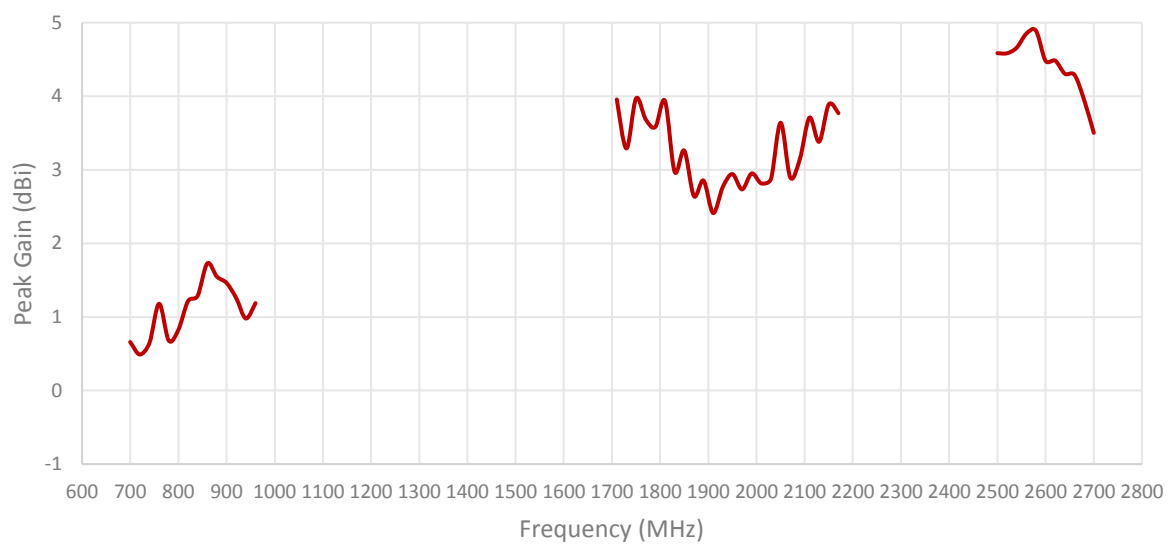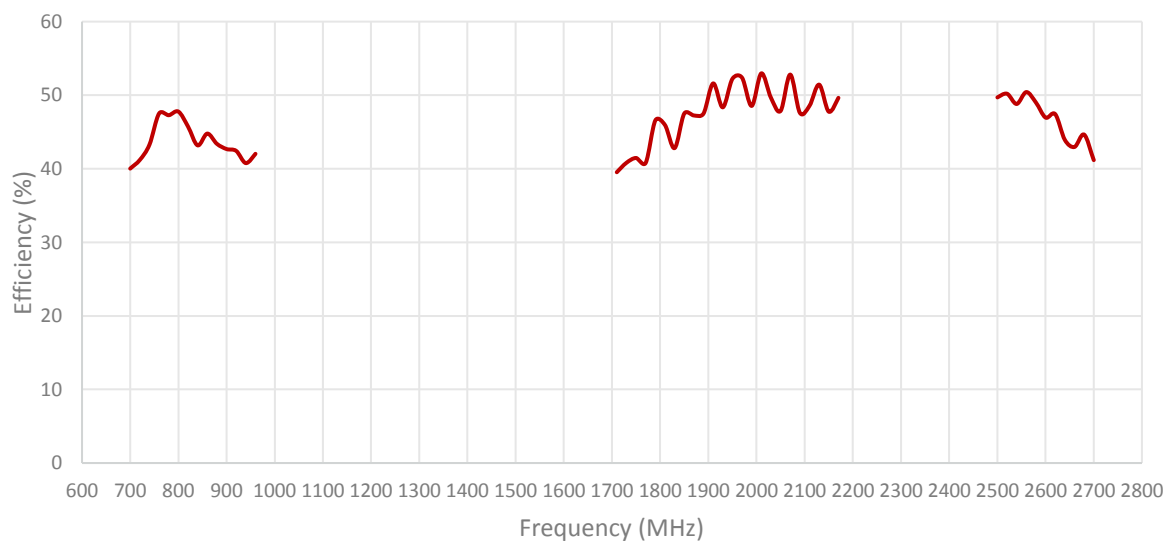


Cable 2: CELLULAR/LTE

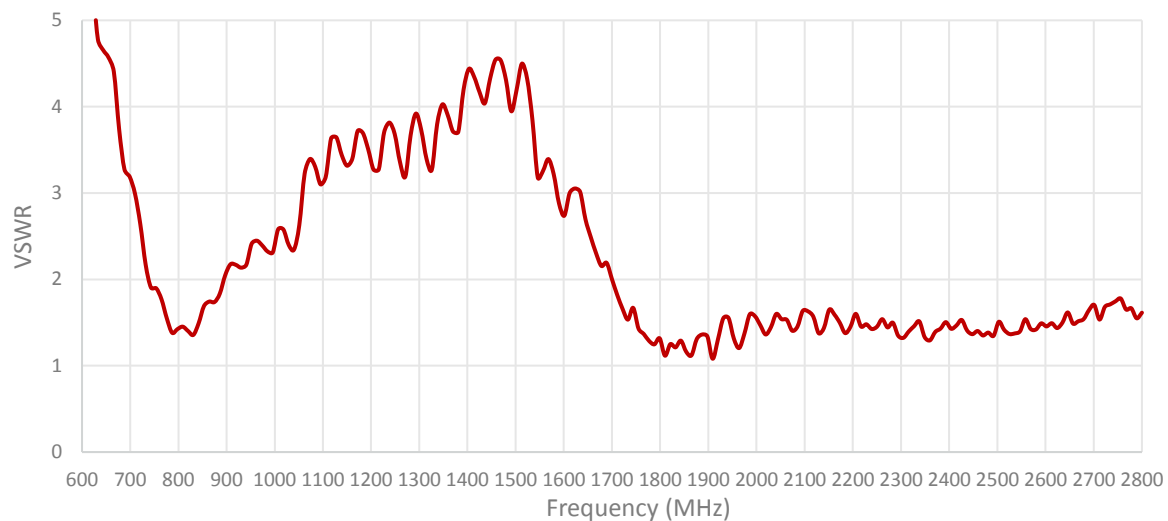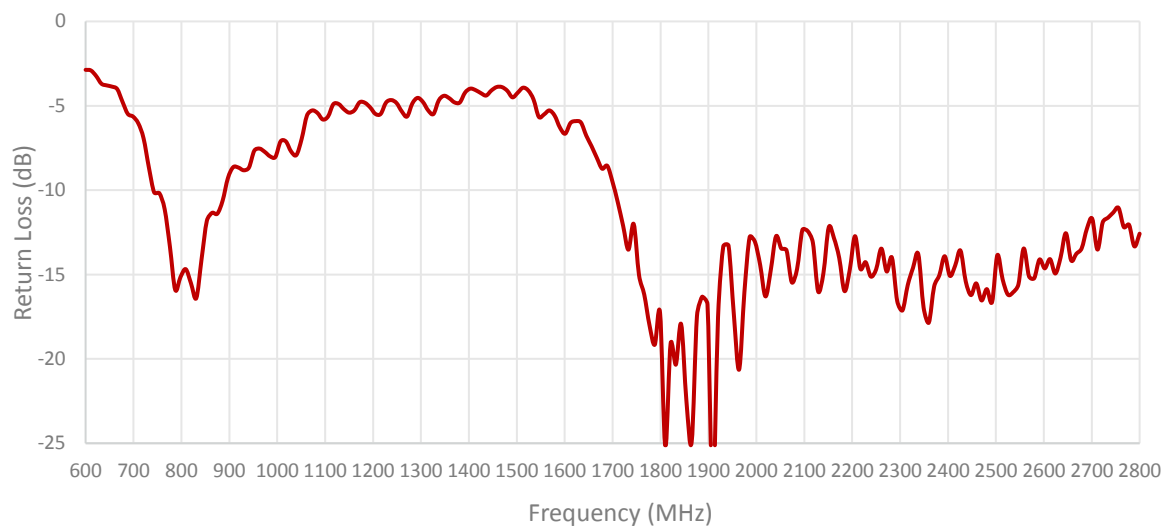


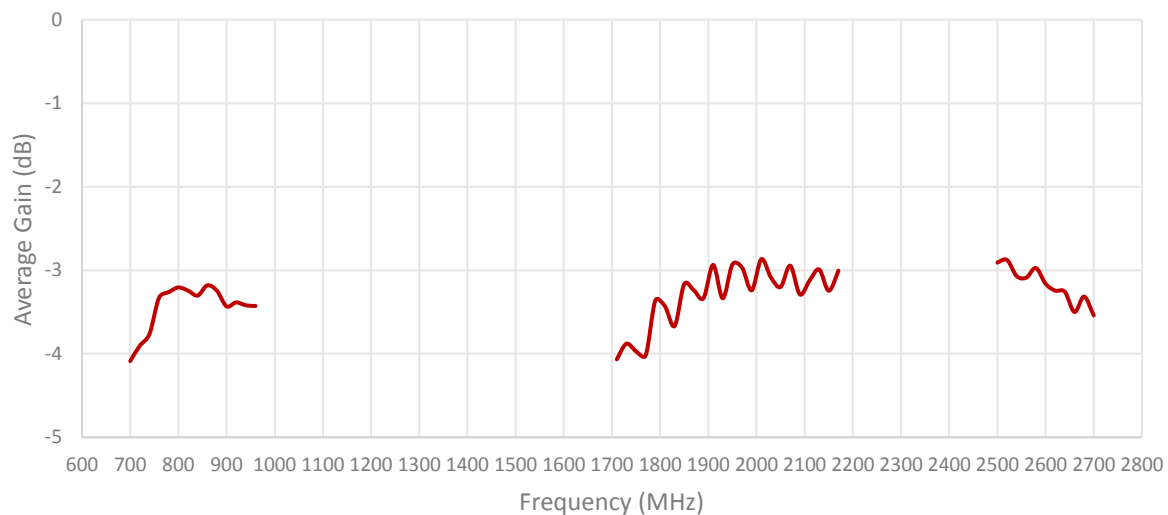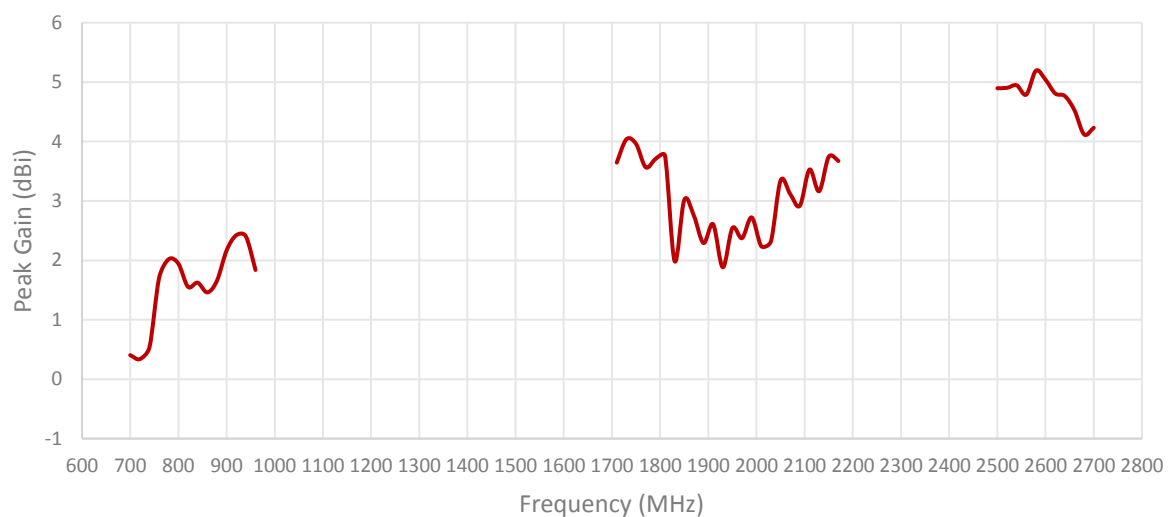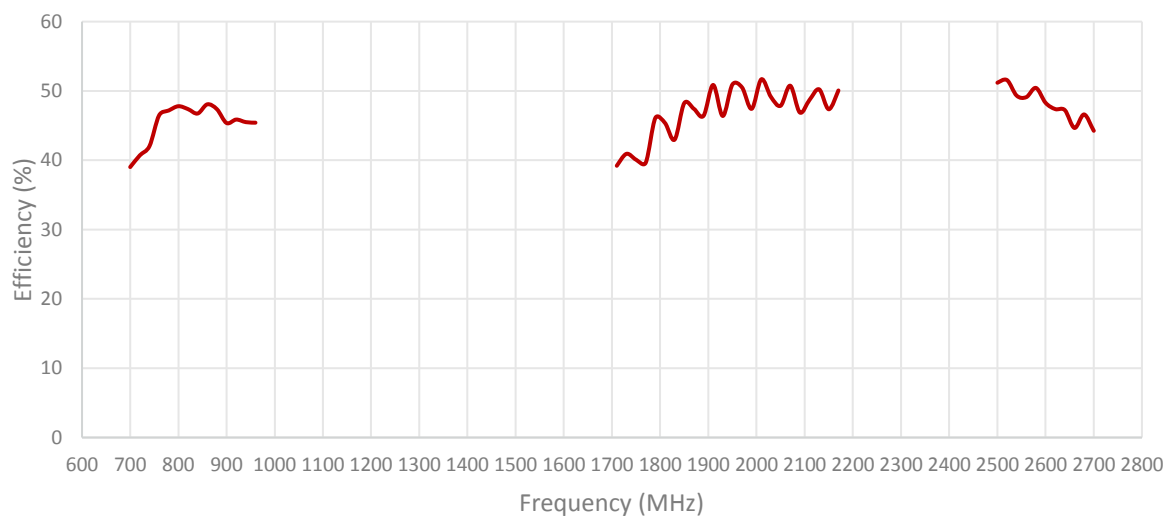

ISOLATION FOR CABLES 1 AND 2

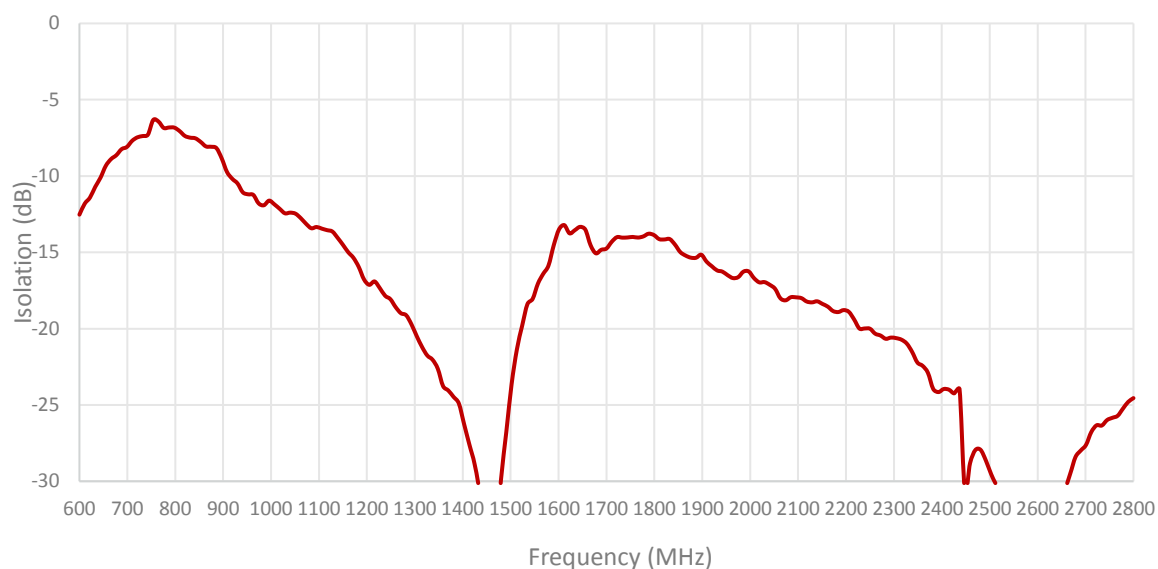


ENVELOPE CORRELATION COEFFICIENT FOR CABLES 1 AND 2

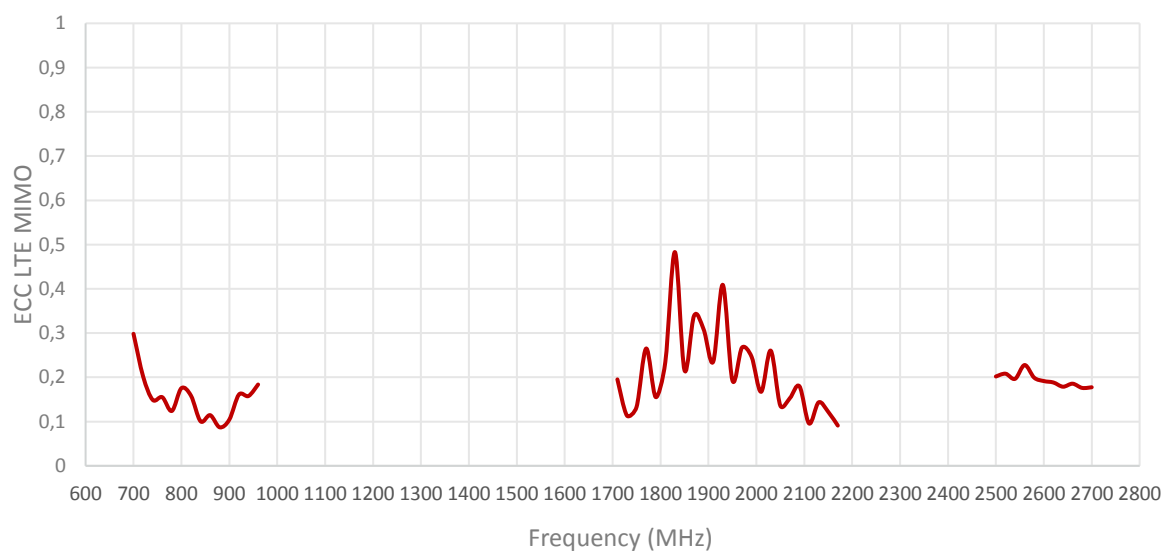




Radiation pattern reference


Cable 1: CELLULAR/LTE

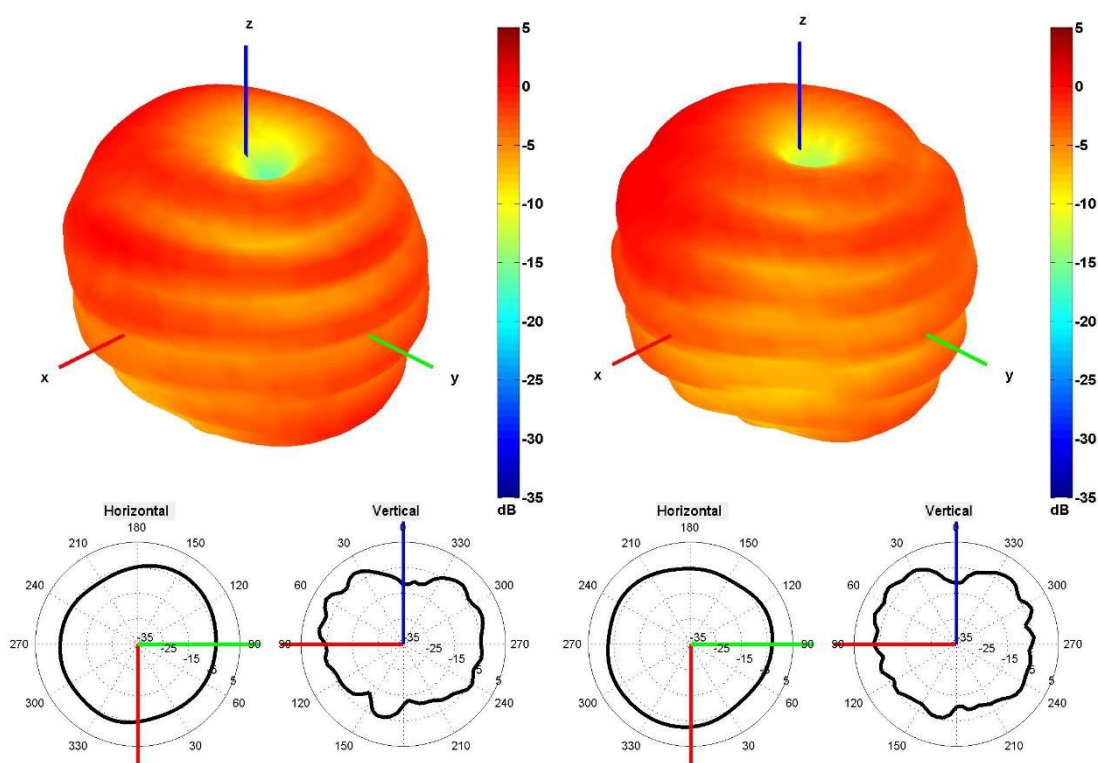


750 and 850 MHz Radiation pattern

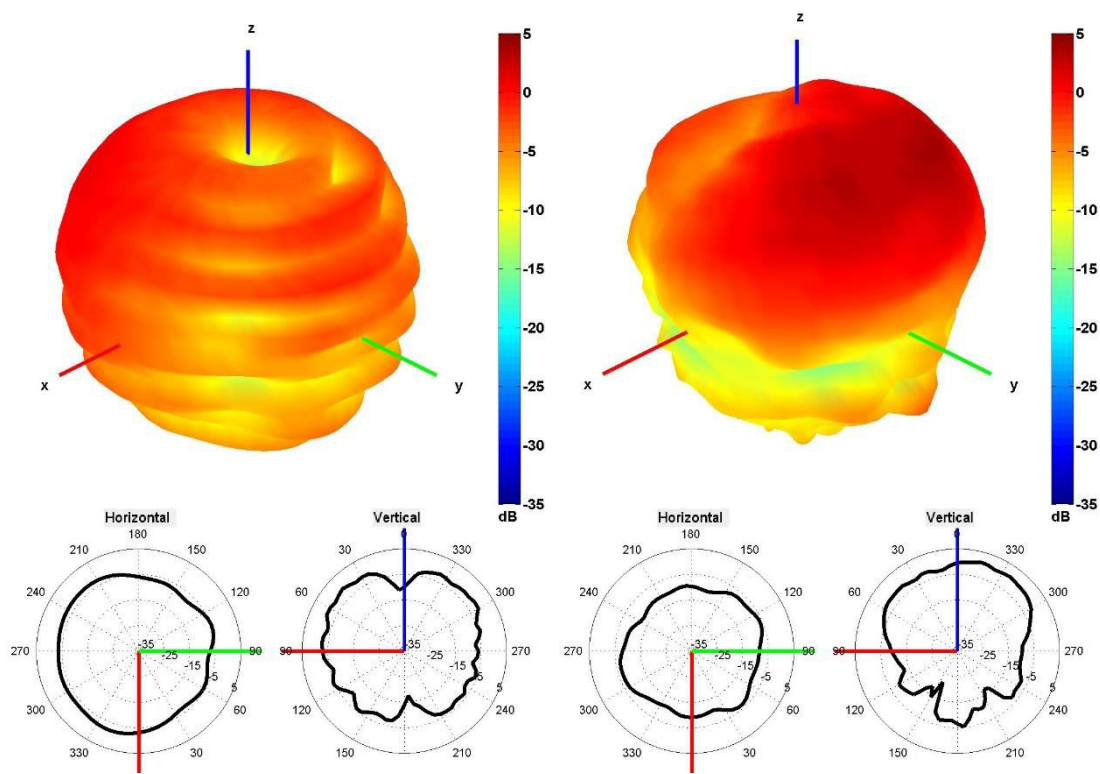

940 and 1750 MHz Radiation pattern

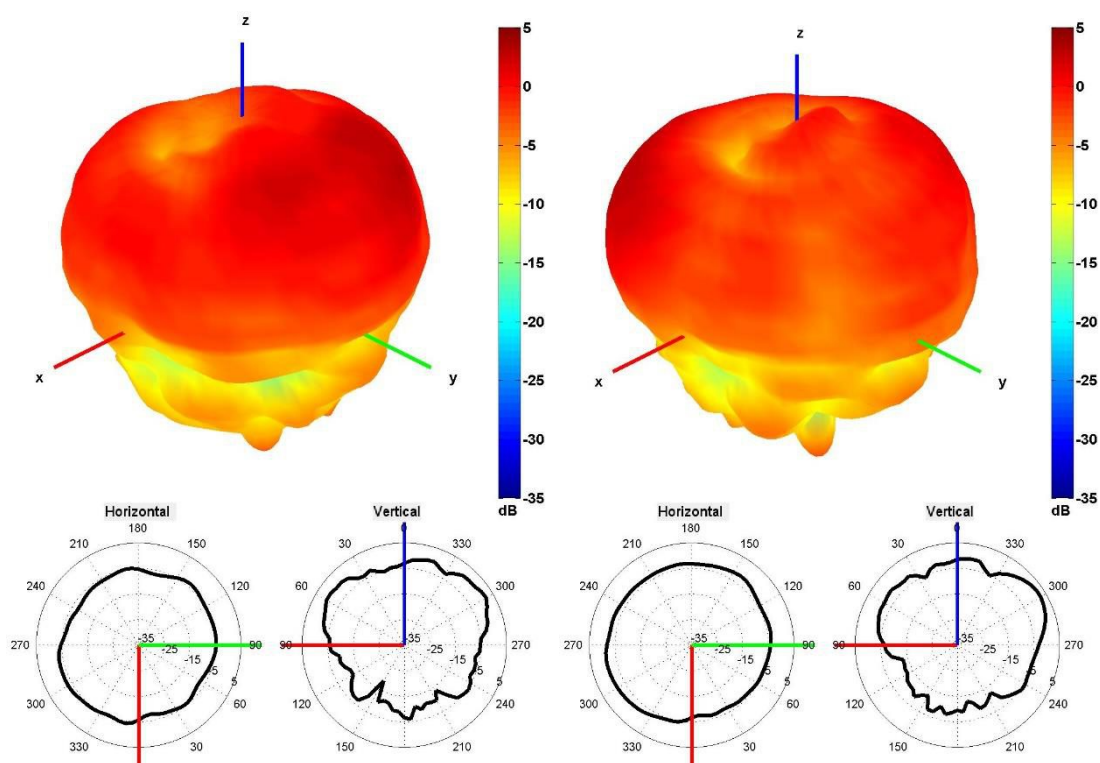


1850 and 1950 MHz Radiation pattern

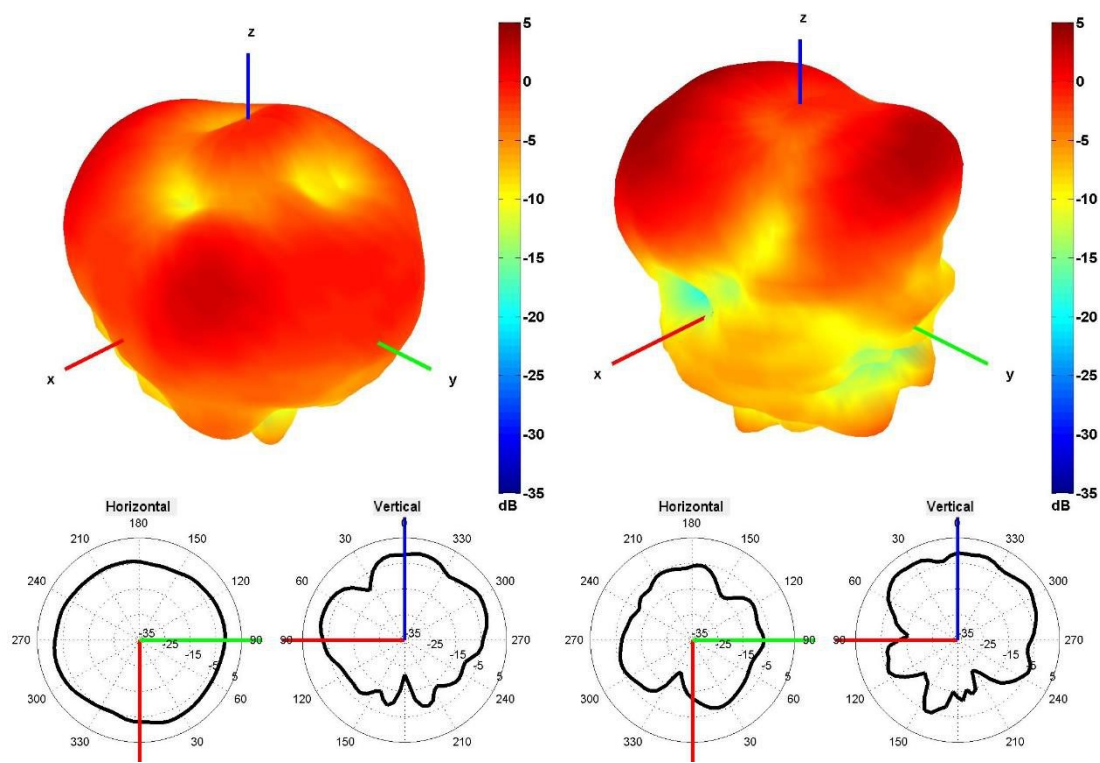


2100 and 2600 MHz Radiation pattern


Cable 2: CELLULAR/LTE

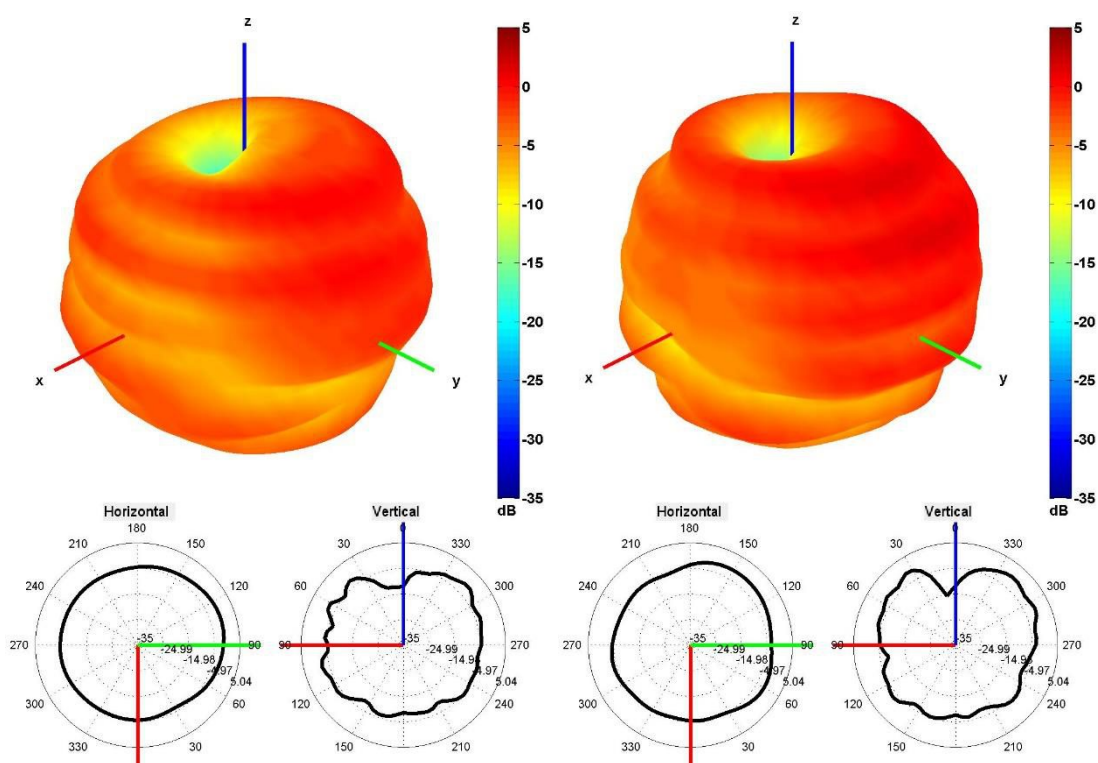


750 and 850 MHz Radiation pattern

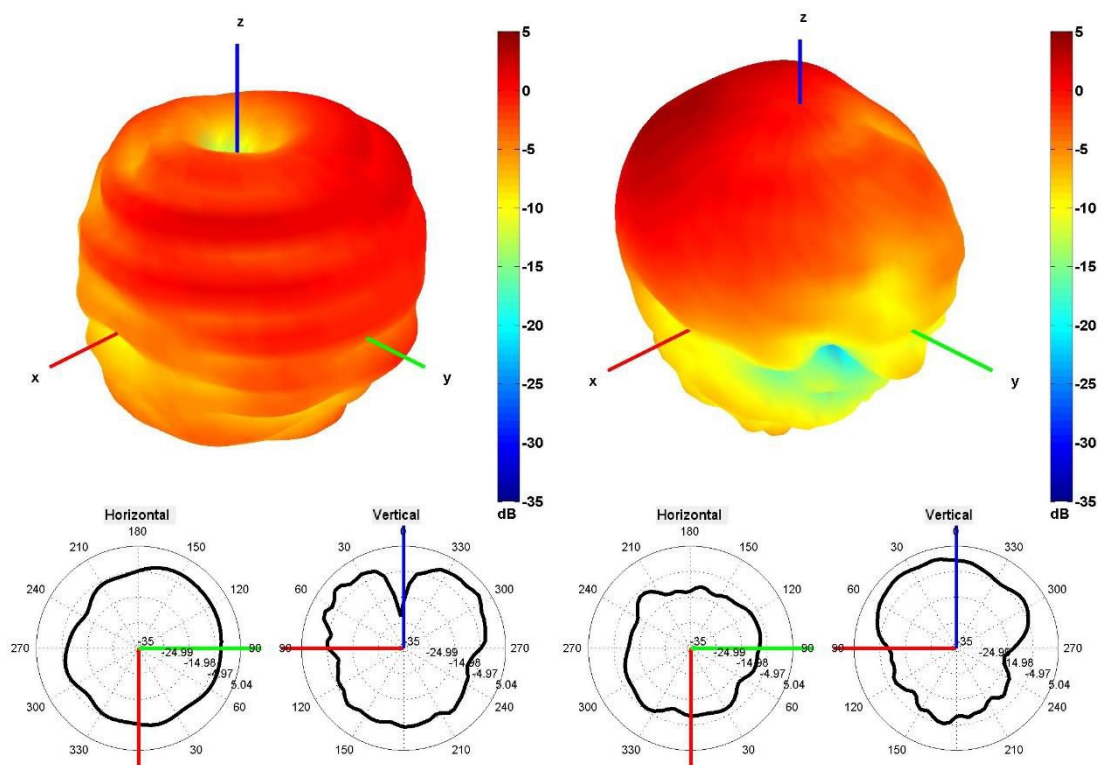

940 and 1750 MHz Radiation pattern


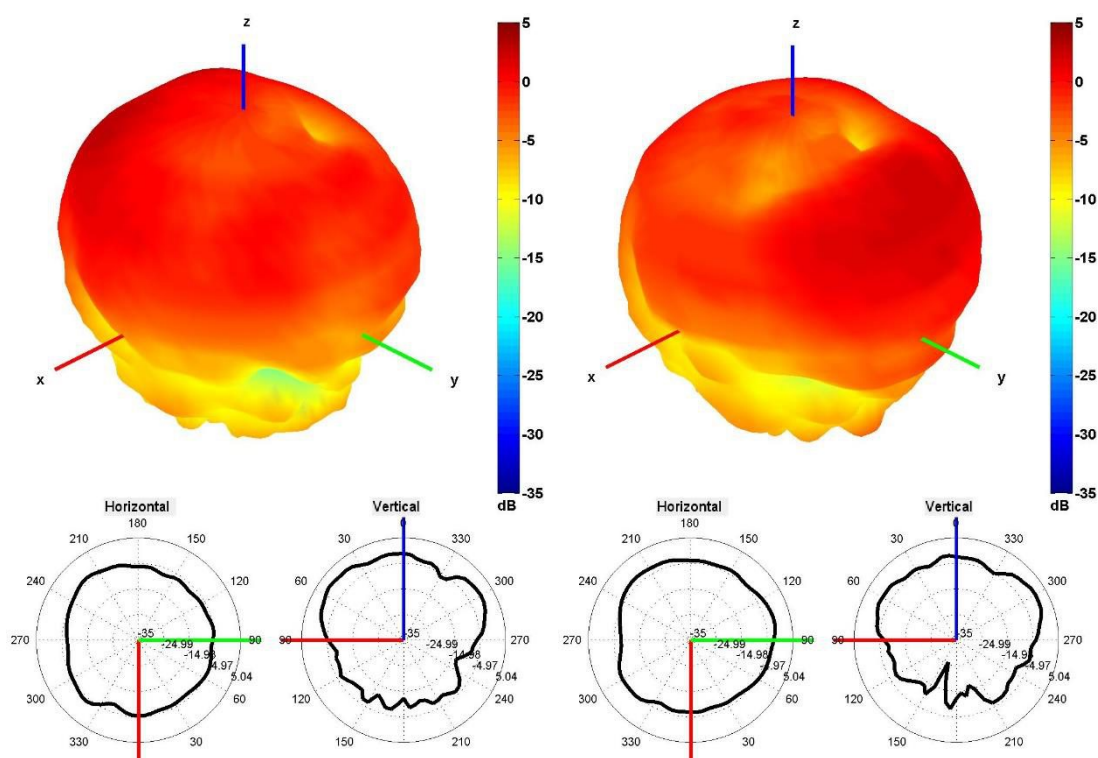


1850 and 1950 MHz Radiation pattern

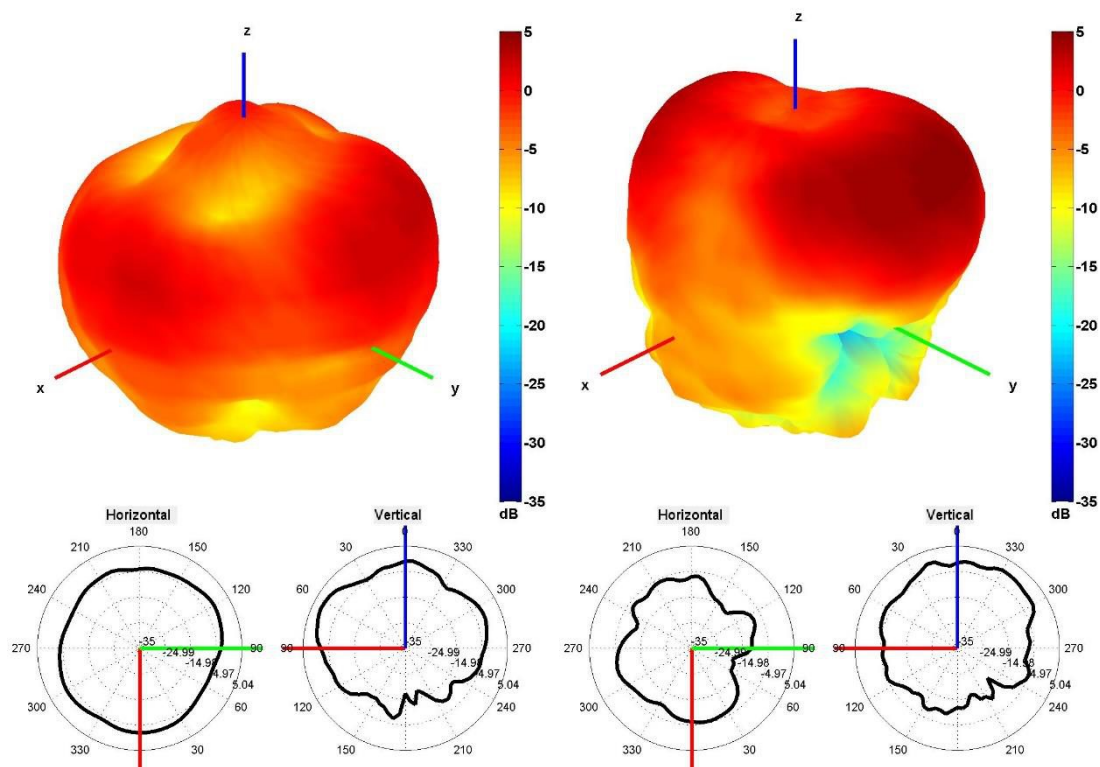


2100 and 2600 MHz Radiation pattern

4. Antenna drawings

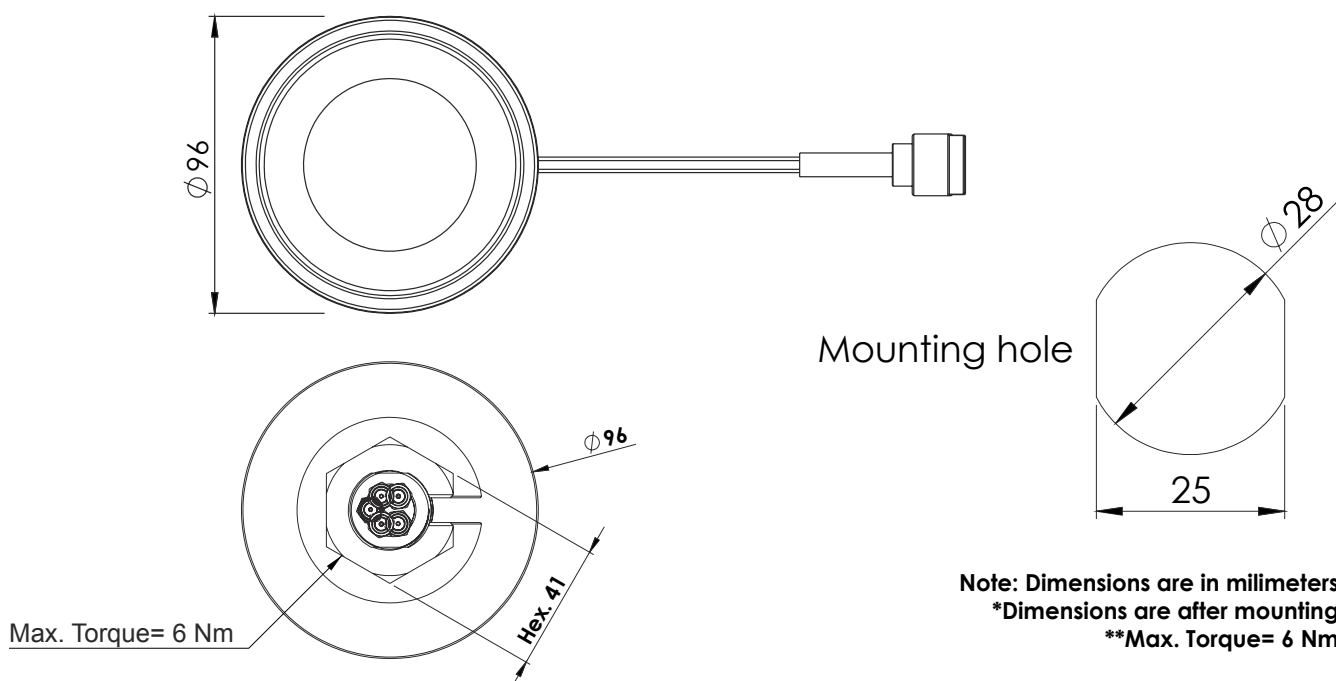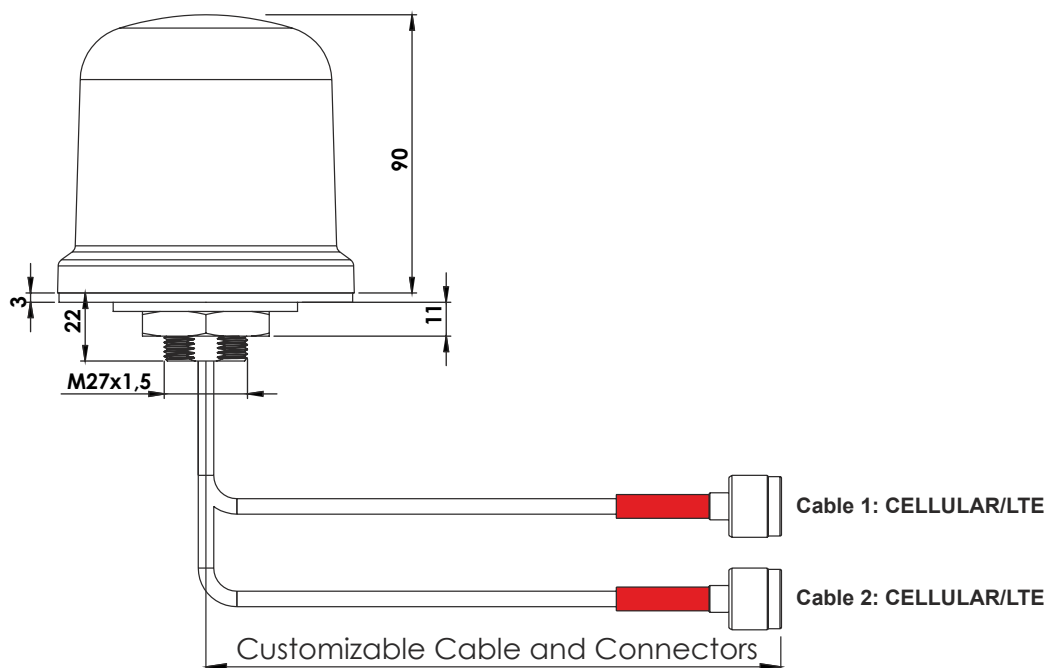


5. Jumper cables drawings - Optional

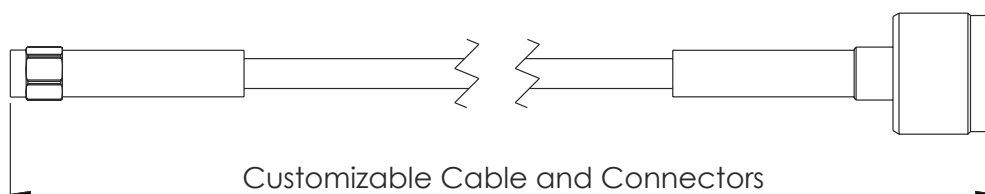

C318N-LMR195-C91N OST - 2×

Cable 1 - 2: CELLULAR/LTE - Shrink tube Orange d6,4

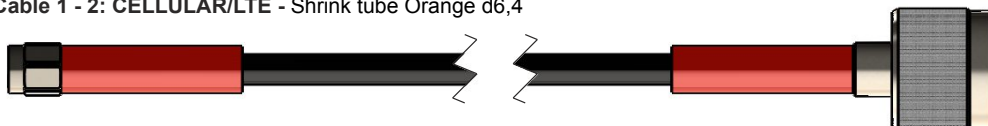

5. Antenna Images





Макро Групп – это:

- дистрибьютор электронных компонентов с 1994 года
- контрактный производитель электроники с 2007 года с собственным производством в Санкт-Петербурге (компания Макро ЕМС, входит в ГК Макро Групп)
- поставщик полупроводниковых материалов
- комплексный поставщик электронных компонентов
- моделирование и производство полупроводниковых эпитаксиальных гетероструктур для задач оптоэлектроники

Головной офис расположен в Санкт-Петербурге. Собственные представительства в крупных промышленных городах России и стран СНГ.

Преимущества для наших заказчиков:

- работа по тендерам с 2012 года
- оформление банковских гарантий
- отсрочки платежей
- поставка электронных компонентов по проектным ценам
- инженерная поддержка проектов заказчиков
- сертификат системы менеджмента качества ISO 9001-2015
- необходимые сертификаты и лицензии

Данный файл получен с сайта www.macrogroup.ru